
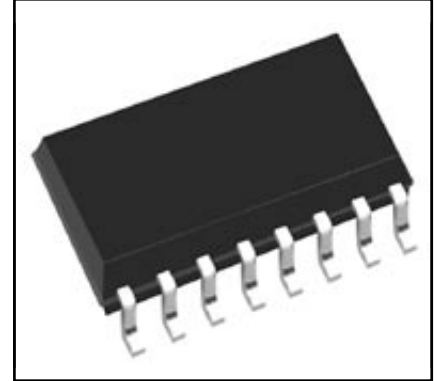


HVIC

High Voltage Integrated Circuit
600 Volts/±2 Amperes

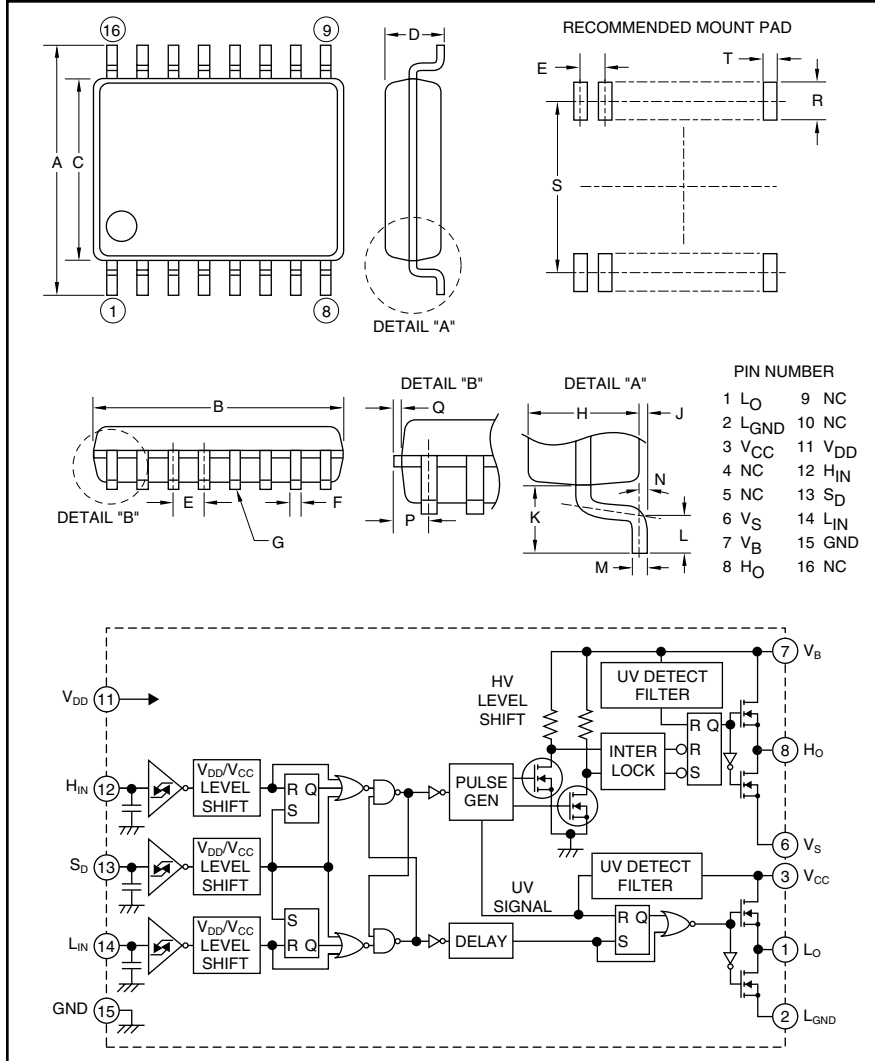

Description:

M81700FP is a high voltage Power MOSFET and IGBT module driver for half-bridge applications.

Features:

- Floating Supply Voltage
- Output Current
- Half-Bridge Driver
- SOP-16

Applications:

- HID
- PDP
- MOSFET Driver
- IGBT Driver
- Inverter Module Control

Ordering Information:

M81700FP is a ±2 Ampere, 600 Volt HVIC, High Voltage Integrated Circuit

Outline Drawing and Circuit Diagram

| Dimensions | Inches | Millimeters |
|------------|------------|-------------|
| A | 0.31±0.01 | 7.8±0.3 |
| B | 0.41±0.004 | 10.1±0.1 |
| C | 0.21±0.004 | 5.3±0.1 |
| D | 0.12 | 2.10 |
| E | 0.05 | 1.27 |
| F | 0.02±0.002 | 0.4±0.05 |
| G | 0.004 | 0.1 |
| H | 0.07 | 1.8 |
| J | 0.01±0.004 | 0.1±0.1 |

| Dimensions | Inches | Millimeters |
|------------|-------------|-------------|
| K | 0.05 | 1.25 |
| L | 0.024±0.008 | 0.6±0.2 |
| M | 0.1±0.002 | 0.2±0.05 |
| N | 4°±4° | 4°±4° |
| P | 0.03 Max. | 0.755 Max. |
| Q | 0.006 | 0.15 |
| R | 0.05 Min. | Min. 1.27 |
| S | 0.30 | 7.62 |
| T | 0.029 | 0.76 |



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

M81700FP

HVIC, High Voltage Integrated Circuit

600 Volts/±2 Amperes


Absolute Maximum Ratings, $T_a = 25^\circ\text{C}$ unless otherwise specified

| Characteristics | Symbol | M81701FP | Units |
|--|---------------|----------------------------|-------|
| High Side Floating Supply Absolute Voltage | V_B | -0.5 ~ 624 | Volts |
| High Side Floating Supply Offset Voltage | V_S | -0.5 ~ 600 | Volts |
| High Side Floating Supply Voltage ($V_{BS} = V_B - V_S$) | V_{BS} | -0.5 ~ 24 | Volts |
| Allowable Offset Supply Voltage Minus Surge ($P_W < 1\mu\text{s}$) | $-V_S$ | -5 | Volts |
| High Side Output Voltage | V_{HO} | $V_S - 0.5 \sim V_B + 0.5$ | Volts |
| Low Side Fixed Supply Voltage | V_{CC} | -0.5 ~ 24 | Volts |
| Low Side Output Voltage | V_{LO} | -0.5 ~ $V_{CC} + 0.5$ | Volts |
| Logic Supply Voltage | V_{DD} | -0.5 ~ 24 | Volts |
| Logic Input Voltage (H_{IN}, L_{IN}) | V_{IN} | -0.5 ~ $V_{DD} + 0.5$ | Volts |
| Shutdown Input Voltage | S_D | -0.5 ~ $V_{DD} + 0.5$ | Volts |
| Low Side Return Offset Voltage ($V_{CC} - L_{GND} < 24V$) | L_{GND} | -5 ~ $V_{CC} + 0.5$ | Volts |
| Allowable Offset Supply Voltage Transient | dV_S/dt | ±50 | V/ns |
| Package Power Dissipation ($T_a = 25^\circ\text{C}$, On Board) | P_d | 0.88 | Watts |
| Linear Derating Factor ($T_a > 25^\circ\text{C}$, On Board) | K_θ | -8.8 | mW/°C |
| Junction to Case Thermal Resistance | $R_{th(j-c)}$ | 50 | °C/W |
| Junction Temperature | T_j | -20 ~ 125 | °C |
| Operation Temperature | T_{opr} | -20 ~ 75 | °C |
| Storage Temperature | T_{stg} | -40 ~ 125 | °C |

Recommended Operating Conditions

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|--|-----------|----------------------|------------|------|------------|-------|
| High Side Floating Supply Absolute Voltage | V_B | | $V_S + 10$ | — | $V_S + 20$ | Volts |
| High Side Floating Supply Offset Voltage | V_S | | 0 | — | 500 | Volts |
| High Side Floating Supply Voltage | V_{BS} | $V_{BS} = V_B - V_S$ | 10 | — | 20 | Volts |
| Low Side Fixed Supply Voltage | V_{CC} | | 10 | — | 20 | Volts |
| Logic Supply Voltage | V_{DD} | | 5 | — | 20 | Volts |
| Logic Input Voltage | V_{IN} | H_{IN}, L_{IN} | 0 | — | V_{DD} | Volts |
| Shutdown Input Voltage | S_D | | 0 | — | V_{DD} | Volts |
| Low Side Return Offset Voltage | L_{GND} | | -5 | — | 5 | Volts |

THERMAL DERATING FACTOR CHARACTERISTICS

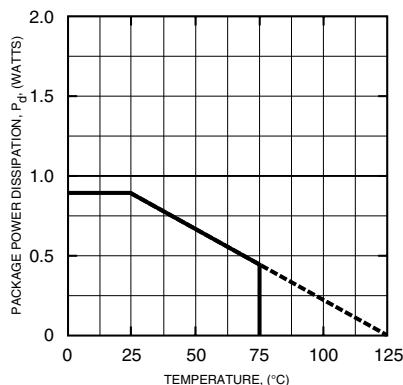

M81700FP

HVIC, High Voltage Integrated Circuit

600 Volts/±2 Amperes

Electrical Characteristics

T_a = 25°C, V_{CC} = V_{BS} (= V_B - V_S) = V_{DD} = 15V, L_{GND} = 0V unless otherwise specified

| Characteristics | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|---|----------------------|---|------|------|------|---------|
| Floating Supply Leakage Current | I _{FS} | V _B = V _S = 600V | — | — | 1 | μA |
| V _{BS} Standby Current | I _{BS} | | — | 0.4 | 0.7 | mA |
| V _{CC} Standby Current | I _{CC} | | — | 0.75 | 1.5 | mA |
| V _{DD} Standby Current | I _{DD} | | — | — | 10 | μA |
| High Level Output Voltage | V _{OH} | I _O = 0A, L _O , H _O | 13.8 | 14.4 | — | Volts |
| Low Level Output Voltage | V _{OL} | I _O = 0A, L _O , H _O | — | — | 0.1 | Volts |
| High Level Input Threshold Voltage | V _{IH15} | H _{IN} , L _{IN} | — | 8.4 | 9.5 | Volts |
| Low Level Input Threshold Voltage | V _{IL15} | H _{IN} , L _{IN} | 6.0 | 6.8 | — | Volts |
| High Level Input Threshold Voltage | V _{IH5} | H _{IN} , L _{IN} (V _{DD} = 5V) | — | 3.1 | 4.1 | volts |
| Low Level Input Threshold Voltage | V _{IL5} | H _{IN} , L _{IN} (V _{DD} = 5V) | 1.4 | 2.4 | — | Volts |
| Shutdown High Level Input Threshold Voltage | V _{ISDH15} | S _D | — | 8.4 | 9.5 | Volts |
| Shutdown Low Level Input Threshold Voltage | V _{ISDL15} | S _D | 6.0 | 6.8 | — | Volts |
| Shutdown High Level Input Threshold Voltage | V _{ISDH5} | S _D (V _{DD} = 5V) | — | 3.1 | 4.1 | Volts |
| Shutdown Low Level Input Threshold Voltage | V _{ISDL5} | S _D (V _{DD} = 5V) | 1.4 | 2.4 | — | Volts |
| High Level Input Bias Current | I _{IH} | V _{IN} = 15V | — | 75 | 150 | μA |
| Low Level Input Bias Current | I _{IL} | V _{IN} = 0V | — | — | 1.0 | μA |
| V _{BS} Supply UV Reset Voltage | V _{BSuvr} | | 7.5 | 8.6 | 9.7 | Volts |
| V _{BS} Supply UV Hysteresis Voltage | V _{BSuvh} | | 0.1 | 0.4 | 0.7 | Volts |
| V _{BS} Supply UV Filter Time | t _{VBSuv} | | — | 10 | — | μs |
| V _{CC} Supply UV Reset Voltage | V _{CCuvr} | | 7.5 | 8.6 | 9.7 | Volts |
| V _{CC} Supply UV Hysteresis Voltage | V _{CCuvh} | | 0.1 | 0.4 | 0.7 | Volts |
| V _{CC} Supply UV Filter Time | t _{VCCuv} | | — | 10 | — | μs |
| Output High Level Short Circuit Pulsed Current | I _{OH} | V _O = 0V, V _{IN} = 15V, P _W < 10μs | — | -2.5 | — | Amperes |
| Output Low Level Short Circuit Pulsed Current | I _{OL} | V _O = 15V, V _{IN} = 0V, P _W < 10μs | — | 2.5 | — | Amperes |
| Output High Level ON Resistance | R _{OH} | I _O = -200mA, R _{OH} = (V _{OH} - V _O)/I _O | — | 10 | 13 | Ω |
| Output Low Level ON Resistance | R _{OL} | I _O = 200mA, R _{OL} = V _O /I _O | — | 2.5 | 3 | Ω |
| High Side Turn-On Propagation Delay | t _{dLH(HO)} | C _L = 1000pF between H _O - V _S | — | — | 350 | ns |
| High Side Turn-Off Propagation Delay | t _{dHL(HO)} | C _L = 1000pF between H _O - V _S | — | — | 330 | ns |
| High Side Turn-On Rise Time | t _{rH} | C _L = 1000pF between H _O - V _S | — | — | 60 | ns |
| High Side Turn-Off Fall Time | t _{fH} | C _L = 1000pF between H _O - V _S | — | — | 30 | ns |
| Low Side Turn-On Propagation Delay | t _{dLH(LO)} | C _L = 1000pf between L _O - GND | — | — | 350 | ns |
| Low Side Turn-Off Propagation Delay | t _{dHL(LO)} | C _L = 1000pf between L _O - GND | — | — | 330 | ns |
| Low Side Turn-On Rise Time | t _{rL} | C _L = 1000pf between L _O - GND | — | — | 60 | ns |
| Low Side Turn-Off Rise Time | t _{fL} | C _L = 1000pf between L _O - GND | — | — | 30 | ns |
| Delay Matching, High Side and Low Side Turn-On | Δt _{dLH} | t _{dLH(HO)} - t _{dLH(LO)} | — | — | 30 | ns |
| Delay Matching, High Side and Low Side Turn-Off | Δt _{dHL} | t _{dHL(HO)} - t _{dHL(LO)} | — | — | 30 | ns |
| Shutdown Propagation Delay | t _{SD} | C _L = 1000pF between H _O -V _S , C _L = 1000pF between L _O -GND | — | — | 350 | ns |

M81700FP

HVIC, High Voltage Integrated Circuit

600 Volts/±2 Amperes

FUNCTION TABLE (X: H or L)


| HIN | LIN | VBS UV | VCC UV | HO | LO | Sd | Behavioral State |
|-----|-----|--------|--------|----|----|----|------------------------------------|
| L | L | H | H | L | L | L | LO = OFF, HO = OFF |
| L | H | H | H | L | H | L | LO = ON, HO = OFF |
| H | L | H | H | H | L | L | LO = OFF, HO = ON |
| H | H | H | H | * | * | L | |
| X | L | L | H | L | L | L | LO = OFF, HO = OFF, Vbs UV tripped |
| X | H | L | H | L | H | L | LO = ON, HO = OFF, Vbs UV tripped |
| L | X | H | L | L | L | L | LO = OFF, HO = OFF, Vcc UV tripped |
| H | X | H | L | L | L | L | LO = OFF, HO = OFF, Vcc UV tripped |
| X | X | H | H | L | L | H | LO = OFF, HO = OFF, SD = ON |

Note : "L" state of VBS UV and VCC UV means that UV trip voltage.
 * If both input signals are "H", refer to TIMING DIAGRAM.

TIMING DIAGRAM


1. Input/Output Timing Diagram

When input signal (H_{IN} or L_{IN}) is "H", then output signal (HO or LO) is "H". In the case of both input signals (H_{IN} and L_{IN}) are "H", first coming input signal (H_{IN} or L_{IN}) "H" is only accepted. Corresponding this signal, output signal (HO or LO) becomes "H". Corresponding the other signal (L_{IN} or H_{IN}), output signal (LO or HO) keeps "L".

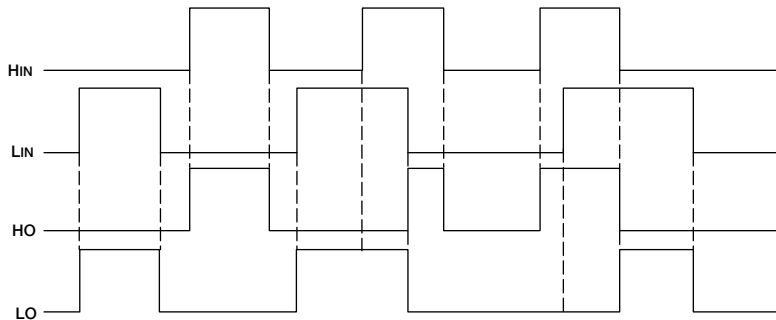


2. Shutdown Input Timing Diagram

When shutdown input signal (S_D) is "H", then output signals (HO and LO) are "L". Output signals (HO and LO) keep "L" by shutdown input signal (S_D) is "L" until next input signal (H_{IN} or L_{IN}) is "H".

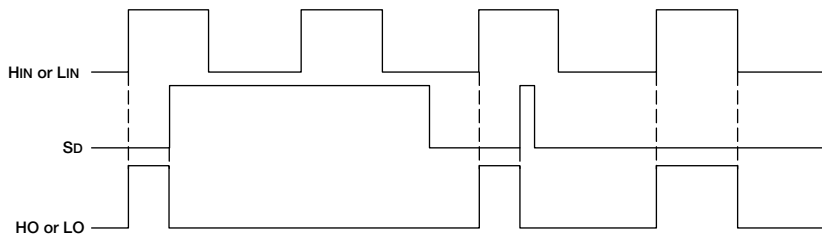

3. VCC (VBS) Supply Under Voltage Lockout Timing Diagram

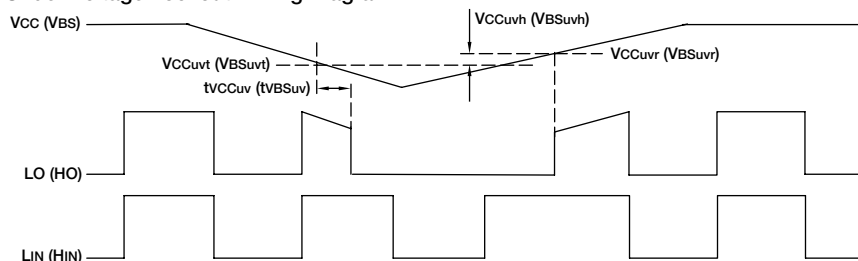

4. Allowable Supply Voltage Transient

Allowable high side floating supply voltage (V_{BS}) transient or low side fixed supply voltage (V_{CC}) transient are below 50V/μs. In case V_{BS} or V_{CC} are started more than 50V/μs, output signal (HO or LO) may be "H".