

T-1 3/4 (5mm) BI-COLOR INDICATOR LAMP

Part Number: WP59SURKCGKW

Hyper Red Green

Features


- Uniform light output.
- Low power consumption.
- 3 leads with one common lead.
- Long life-solid state reliability.
- RoHS compliant.

Description

The Hyper Red source color devices are made with Al-GaInP on GaAs substrate Light Emitting Diode.

The Green source color devices are made with AlGaInP on GaAs substrate Light Emitting Diode.

Package Dimensions

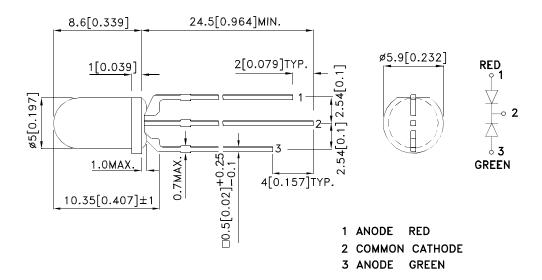

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is ±0.25(0.01") unless otherwise noted.
- 3. Lead spacing is measured where the leads emerge from the package.
 4. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

SPEC NO: DSAF4497 **REV NO: V.12A** DATE: FEB/15/2013 PAGE: 1 OF 7 APPROVED: WYNEC **CHECKED: Allen Liu** DRAWN: Y.Liu ERP: 1101005941





Selection Guide

Part No.	Dice	Lens Type	lv (mcd) [2] @ 20mA		Viewing Angle [1]
			Min.	Тур.	201/2
WP59SURKCGKW	Hyper Red (AlGaInP)	White Diffused	600	1200	- 60°
			*80	*200	
	Green (AlGaInP)		80	180	
			*80	*180	

- 1. 01/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.
 2. Luminous intensity/ luminous Flux: +/-15%.

 * Luminous intensity value is traceable to the CIE127-2007 compliant national standards.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions	
λpeak	Peak Wavelength	Hyper Red Green	645 574		nm IF=20mA		
λD [1]	Dominant Wavelength	Hyper Red Green	630 570		nm	IF=20mA	
Δλ1/2	Spectral Line Half-width	Hyper Red Green	28 20		nm	IF=20mA	
С	Capacitance	Hyper Red Green	35 15		pF	VF=0V;f=1MHz	
VF [2]	Forward Voltage	Hyper Red Green	1.95 2.1	2.5 2.5	V	IF=20mA	
lR	Reverse Current	Hyper Red Green		10 10	uA	V _R = 5V	

Notes:


- 1.Wavelength: +/-1nm.
- 2. Forward Voltage: +/-0.1V.
- 3. Wavelength value is traceable to the CIE127-2007 compliant national standards.

Absolute Maximum Ratings at TA=25°C


Parameter	Hyper Red	Green	Units		
Power dissipation	75	75	mW		
DC Forward Current	30	30	mA		
Peak Forward Current [1]	185	150	mA		
Reverse Voltage	ţ	V			
Operating / Storage Temperature	-40°C To +85°C				
Lead Solder Temperature [2]	260°C For 3 Seconds				
Lead Solder Temperature [3]	260°C For 5 Seconds				


- 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
 2. 2mm below package base.
- 3. 5mm below package base.


SPEC NO: DSAF4497 **REV NO: V.12A** DATE: FEB/15/2013 PAGE: 2 OF 7 APPROVED: WYNEC **CHECKED: Allen Liu** DRAWN: Y.Liu ERP: 1101005941

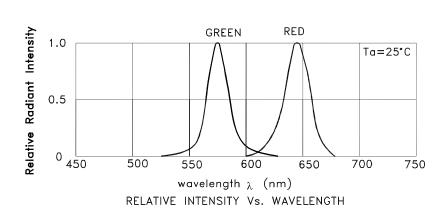



WP59SURKCGKW Hyper Red














SPEC NO: DSAF4497 REV NO: V.12A DATE: FEB/15/2013 PAGE: 3 OF 7
APPROVED: WYNEC CHECKED: Allen Liu DRAWN: Y.Liu ERP: 1101005941


Green






2.5












SPATIAL DISTRIBUTION

SPEC NO: DSAF4497 **REV NO: V.12A** DATE: FEB/15/2013 PAGE: 4 OF 7 APPROVED: WYNEC **CHECKED: Allen Liu** DRAWN: Y.Liu ERP: 1101005941

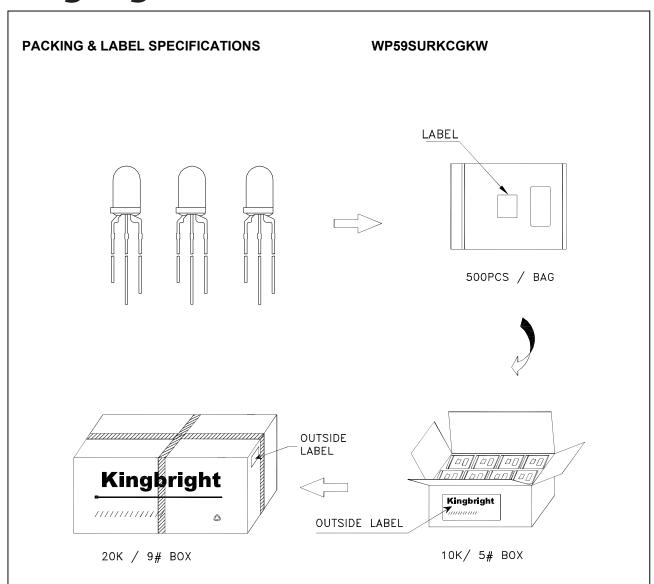





SPEC NO: DSAF4497 APPROVED: WYNEC REV NO: V.12A CHECKED: Allen Liu DATE: FEB/15/2013 DRAWN: Y.Liu PAGE: 5 OF 7 ERP: 1101005941

PRECAUTIONS

1. The lead pitch of the LED must match the pitch of the mounting holes on the PCB during component placement. Lead—forming may be required to insure the lead pitch matches the hole pitch. Refer to the figure below for proper lead forming procedures. (Fig. 1)

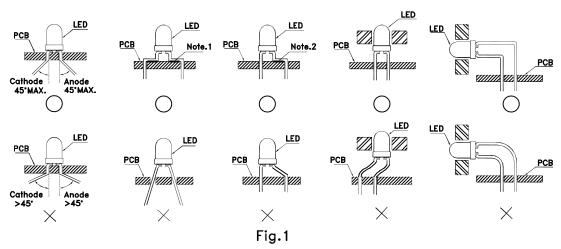

- "() " Correct mounting method "imes" Incorrect mounting method
- 2. When soldering wire to the LED, use individual heat—shrink tubing to insulate the exposed leads to prevent accidental contact short—circuit. (Fig.2)
- 3. Use stand—offs (Fig.3) or spacers (Fig.4) to securely position the LED above the PCB.




- 4. Maintain a minimum of 2mm clearance between the base of the LED lens and the first lead bend. (Fig. 5 and 6)
- 5. During lead forming, use tools or jigs to hold the leads securely so that the bending force will not be transmitted to the LED lens and its internal structures. Do not perform lead forming once the component has been mounted onto the PCB. (Fig. 7)


SPEC NO: DSAF4497 REV NO: V.12A DATE: FEB/15/2013 PAGE: 6 OF 7

APPROVED: WYNEC CHECKED: Allen Liu DRAWN: Y.Liu ERP: 1101005941


6. Do not bend the leads more than twice. (Fig. 8)



7. During soldering, component covers and holders should leave clearance to avoid placing damaging stress on the LED during soldering.

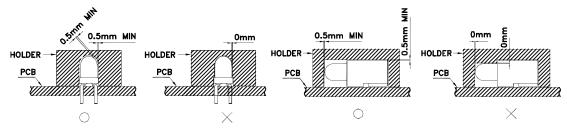

- 8. The tip of the soldering iron should never touch the lens epoxy.
- 9. Through—hole LEDs are incompatible with reflow soldering.
- 10. If the LED will undergo multiple soldering passes or face other processes where the part may be subjected to intense heat, please check with Kingbright for compatibility.
- 11. Recommended Wave Soldering Profiles:

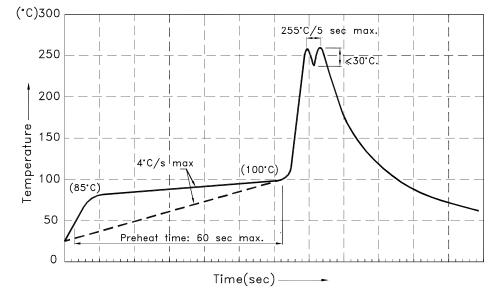

Notes:

- 1.Recommend pre—heat temperature of 105°C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260°C
- 2.Peak wave soldering temperature between 245°C \sim 255°C for 3 sec (5 sec max).
- $3.\mathrm{Do}$ not apply stress to the epoxy resin while the temperature is above $85^{\circ}\mathrm{C}.$
- 4.Fixtures should not incur stress on the component when mounting and during soldering process. 5.SAC 305 solder alloy is recommended.
- 6.No more than one wave soldering pass.

All design applications should refer to Kingbright application notes available at http://www.KingbrightUSA.com/ApplicationNotes

SPEC NO: DSAF4497 REV NO: V.12A DATE: FEB/15/2013 PAGE: 7 OF 7

APPROVED: WYNEC CHECKED: Allen Liu DRAWN: Y.Liu ERP: 1101005941