
Pomona®

Model 4022 Insulated Banana Jack, Miniature With Wire Wrap Terminal

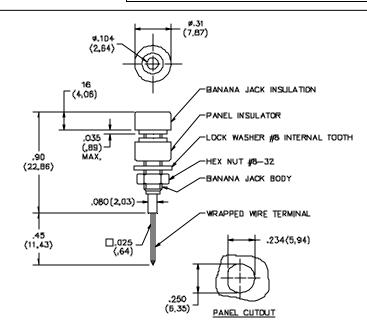

FEATURES:

- Accepts miniature banana plugs.
- Mounts in panels up to .250" thick.

MATERIALS:

Jack: Nickel Plated Brass

Terminal: Gold Plated Phosphor Bronze

Insulation: Polycarbonate molded to Banana Jack body

Panel Insulator: Polycarbonate. Color matches color of Banana Jack insulation.

Lockwasher #8 Internal Tooth: Steel. Nickel plated per QQ-N-290 Class 2, 200/300 microinches.

Wrapped Wire Terminal: Beryllium Copper. Gold plated per MIL-G-45204, Type II Class 00 over electroless nickel per MIL-C-26074, Class 1, 200/300 microinches.

RATINGS:

Operating Temperature: +115°C (+239°F) Max. Operating Voltage: 1500 VDC Current: 3 Amperes

ORDERING INFORMATION: Model 4022-*

Standard Colors: Available in 10 colors: -0 Black, -2 Red, -3 Orange, -4 Yellow, -5 Green, -6 Blue, -7 Violet, -8 Gray, -9 White Sold in packages of 10 per color.

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Made in USA

6/9/99	Sales: 800-490-2361 Fax: 888-403-3360
SY/EH/LS	Technical Assistance: 800-241-2060
S:\Engineering \Release\DataSheets\FlukeDataSheet\d4022 1 01.doc	