

乐清市正永机电有限公司

YUEQING ZHENGYONG ELECTRICAL CO.,LTD

地址: 浙江省乐清市柳市镇荷岙工业区 ADD: Heao Industrial Zone, Liushi Town, Yueqing City, Zhejiang China.

Tel: +86-577-61761217 +86-18006686127 Fax: +86-577-61767217 www.cn-zye.com info@cn-zye.com




ZYE1-P Series Electro Holding Magnets

Purpose

Electro Holding Magnet in the energized state can produce a strong adhesive force, it can be installed in the automation equipment is adsorbed on to stop or move the object role to play.

Distribution is widely used in automated production line, sorting machines, robots, laboratory equipment, medical, grinding, cutting, cutting and other automated processing production line delivery of materials or products, delivery, simple control, effort saving, safe, reliable, and can be remotely operation. Routine use of working voltage for DC12V and 24V.

Appearance and installation dimensions

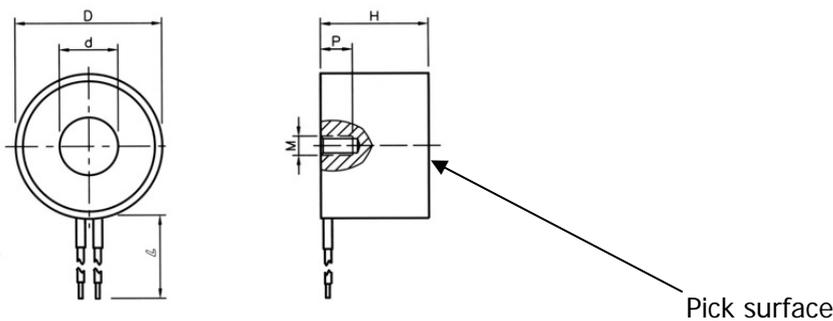

Electro Holding Magnet							With connecting wires			
Type	D	d	H	M	P	L	Power Consumpt	Holding Force	Weight	Protection
	mm	mm	mm	mm	mm	mm	W	N	g	
ZYE ₁ -P20/15	Φ20	Φ8	15	M3	6	200	3	25	30	IP54
ZYE ₁ -P25/20	Φ25	Φ10	20	M4	6	200	4	50	50	
ZYE ₁ -P30/22	Φ30	Φ12	22	M4	6	250	5	100	80	
ZYE ₁ -P34/18	Φ34	Φ16	18	M4	6	250	6	180	90	
ZYE ₁ -P40/20	Φ40	Φ18	20	M5	8	250	8	250	130	
ZYE ₁ -P49/21	Φ49	Φ22	21	M6	8	300	10	400	230	
ZYE ₁ -P50/27	Φ50	Φ22	27	M5	8	300	10	500	300	
ZYE ₁ -P59/34	Φ59	Φ27	34	M8	10	300	12	700	560	
ZYE ₁ -P65/30	Φ65	Φ26	30	M8	12	300	13	800	600	
ZYE ₁ -P80/38	Φ80	Φ34	38	M8	12	300	14	1000	1100	
ZYE ₁ -P100/40	Φ100	Φ42	40	M8	15	300	15	1200	1900	

Notes for Use

Adsorb surfaces should as far as possible level, and adsorption suction and not less electromagnet of face. Attraction is the solenoid pull the iron surface and the adsorbed (magnetic metal, Not less than 5 mm thickness) after contact with electricity generated entirely suction.