SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283

CSA CERTIFIED: CSA 22.2, # 0,0.4,8

VDE APPROVED: EN 60939-2

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 6 AMP/40°C, 120/250 VAC

LINE FREQUENCY: 50-60Hz

MAXIMUM LEAKAGE CURRENT,

 $- \wedge$

0.16 mA@ 120V 60Hz EACH LINE TO GROUND:

0.28 mA@ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ir.

/ MINITALIM / INCEDITED | DCC

IN AN AMBIENT, T_0 , HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, I_0 , IS AS FOLLOWS: $I_0 = I_0 - \sqrt{100 - T_0}$ $I_0 = I_r - \sqrt{100 - I_0}$

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR 8 ZECONDZ

CATALOG # 6ERK1 EC # APPRVD. DATE 08-028933 PJD 19N0V08

CUSTOMER DRAWING

TEST SPECIFICATIONS:

INDUCTANCE: 5.1 mH NDMINAL CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

LINE TO GROUND: 0.0044 μF ±20% LINE TO LINE: 0.741 μF±20% DISCHARGE RESISTOR: 470K △

L/G AND L/L I.R.

NO DISCHARGE RESISTOR: 6000M₁ (MIN.) @ 100VDC,


20°C AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 2250 VDC FOR 1 MINUTE LINE TO LINE: 1450 VDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

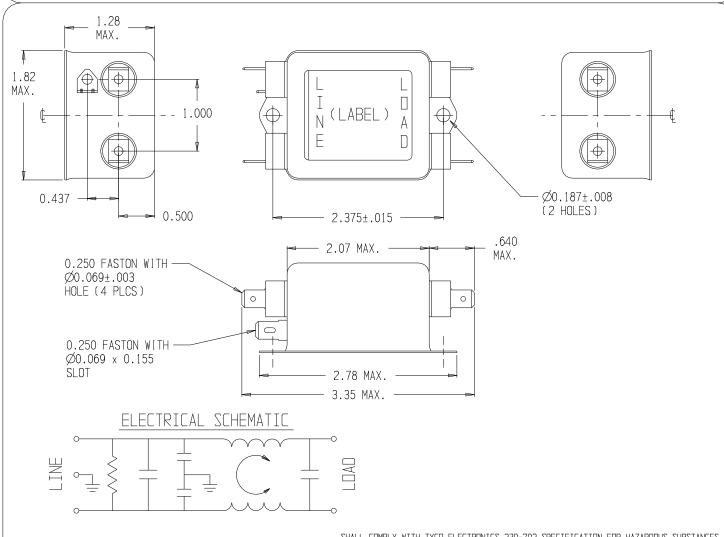

SHALL COMPLY WITH TYCO ELECTRONICS 230-702 SPECIFICATION FOR HAZARDOUS SUBSTANCES

20V- 20V(WINIWNW) INZEKLINN FNZZ											IHIRU ANGLE (())	
FREDUENCY MHz	. 05	. 10	. 15	.50	1.0	2.0	5.0	10	20	30	PROJECTION UNLESS OTHERWISE SPECIFIED,	Tyco Electronics CORCOM PRODUCTS, 620 S. BUTTERFIELD RD. MANDELEIN IL 60060
COMMON dB	19	25	29	37	43	44	48	46	50	48	TOLERANCE TO BE ±.025 MATERIAL & FINISH: AS SUPPLIED THIS INFORMATION IS COMPONENTIAL AND PREPRIETARY TO THIS OFFICE REFERENCES CORPONENTIAL AND PROPRIETARY TO THIS OFFICE REFERENCES CORPONENTIAL AND TO SHORTWISE SUBSISIARIES	POWER LINE FILTER TYCO ELECTRONICS PART NO. 1-1609036-8
DIFF. dB	14	14	13	59	74	80	72	68	61	60	TYCE ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED ID ANYONE OTHER THE TYCE ELECTRONICS PERSONEL, WITHOUT WRITTEN AUTHORIZATION HARRISBURG, PENNSYLVANIA USA	CATALOG NO. REV. DRW. BY: PJO DRIG: PJO REV. 6ERK1 4

TUTOD ANGLE