


# VLF504015MT-1R0N-CA

Applications		Automotive Grade
Feature		Wire Wound
		Magnetic Shield
		Ferrite Core
		AEC-Q200
Series	VLF-M Series / VLF504015MT-CA Type	
Status	PROD	

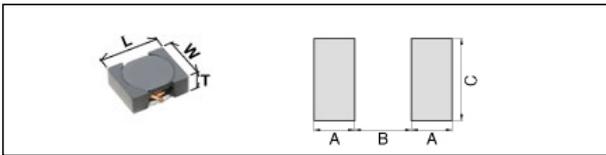

Size	
Length(L)	5.00mm +/-0.30mm
Width(W)	4.00mm +/-0.30mm
Thickness(T)	1.50mm Max.
Recommended Land Pattern (A)	1.30mm Nom.
Recommended Land Pattern (B)	1.60mm Nom.
Recommended Land Pattern (C)	2.20mm Nom.


Electrical Characteristics	
Inductance	1uH +/-30% at 1MHz
Rated Current (L Change) [Typ.]	4.41A (30% Down)
Rated Current (L Change) [Max.]	3.72A (30% Down)
Rated Current (Temperature Rise) [Typ.]	3.61A (40degC Rise)
DC Resistance [Nom.]	26mΩ
DC Resistance [Max.]	32mΩ

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105degC
Soldering Method	Reflow
AEC Q200	Yes
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	1000Pcs Min.
Weight	0.114g


•This PDF document was created based on the data listed on the TDK Corporation website.  
 •All specifications are subject to change without notice.

# VLF504015MT-1R0N-CA


**Characteristic Graphs** (This is reference data, and does not guarantee the product's characteristics.)

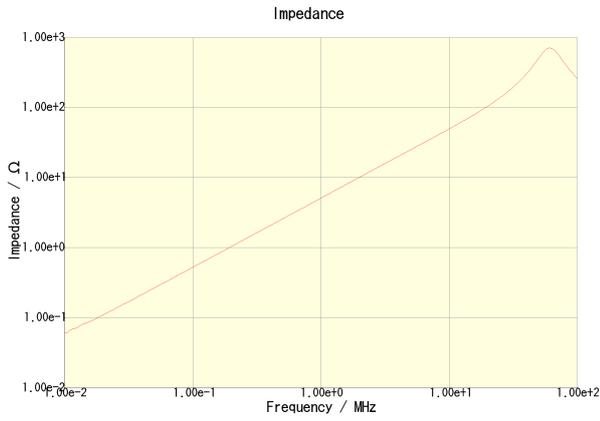


VLF504015MT-1R0N-CA

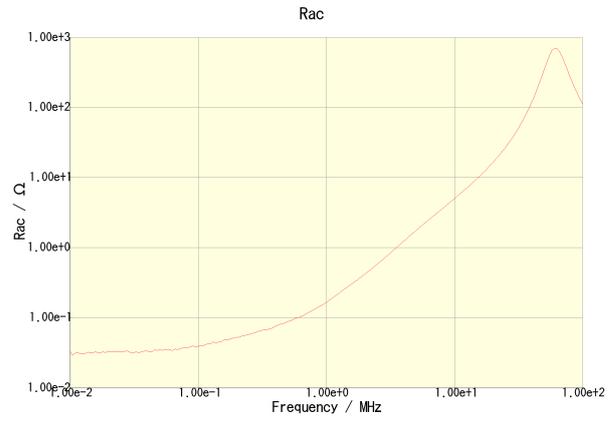

VLF504015MT-1R0N-CA

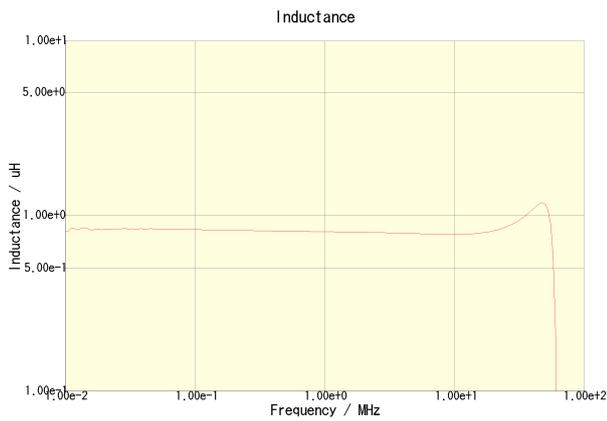

VLF504015MT-1R0N-CA

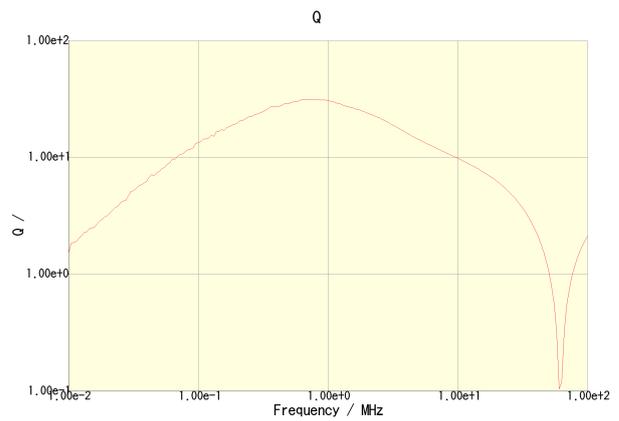


VLF504015MT-1R0N-CA


•This PDF document was created based on the data listed on the TDK Corporation website.  
 •All specifications are subject to change without notice.

# VLF504015MT-1R0N-CA

**Characteristic Graphs** (This is reference data, and does not guarantee the product's characteristics.)

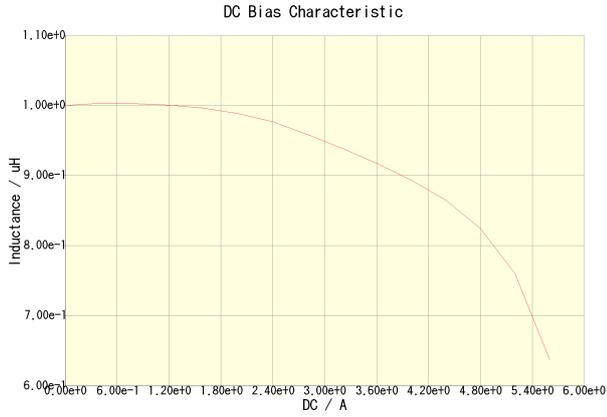

VLF504015MT-1R0N-CA(Amb. Temp. = 20degc)

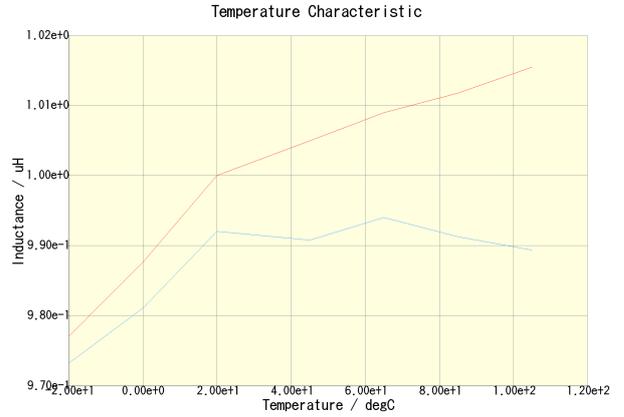

VLF504015MT-1R0N-CA(DC = 0A) VLF504015MT-1R0N-CA(DC = 1.805A)

Temperature Rise by DC
no data available

•This PDF document was created based on the data listed on the TDK Corporation website.  
 •All specifications are subject to change without notice.