
### **Technical Data Sheet**

# Rosenberger

Cable assembly RPC-2.92 Plug / PRC-2.92 Plug RA – RTK 106

## LU1-054-XXX

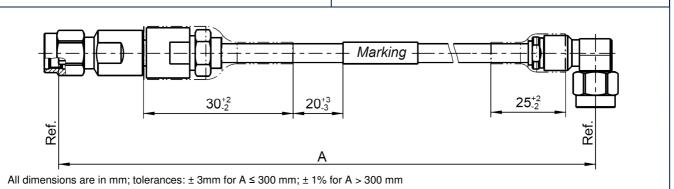

Available variants Marking Туре max. Insertion loss at 40 GHz Weight (g) / pce ROSENBERGER YYYY-WW LU1-054-XXX ≤ 0.00285 dB/mm \* A mm + 0.6 dB LU1-054-XXX 0.0361 g/mm \* A mm + 18.4. g FAC-RRRRRRR SSSS XXX – length in mm = A YYYY - year WW – week ssss – serial no. RRRRRRR – lot nr. FAC - Factory Code Note: max. Insertion Loss: First constant = Cable attenuation in dB /mm; Second Constant = Connector left and Connector right +needed Adaptor Weight: First constant = Cable- and Armour- weight per mm; Second Constant = Connector left and Connector right weight per pce

### Assembly parts

Connector left Connector right Cable RPC-2.92 plug RPC-2.92 plug right angle RTK 106 02S121-2U1S2 02S221-2U1S3

#### Electrical data

Impedance Frequency Return loss<sup>1</sup> Insertion loss<sup>1</sup> 50 Ω DC to 40 GHz ≥ 15.6 dB, DC to 40 GHz see table available variants

Individual testing and documentation:

Measurement plot with all 4 S-Parameters (S11; S22; S21; S12) is included with the cable assembly and on the backside the care and handling instruction is printed. Measurement adaptors used are mentioned in the commentary field.

<sup>1</sup> Return Loss and Insertion Loss includes the measurement adaptor

Mechanical data	
Minimum bend radius: Single 6.35 mm	Multiple 38.4 mm
Environmental data	
Temperature range RoHS	-40°C to +85°C compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date		Rev.	Engineering change number	Name		Date
Martin Moder	27.06.17	Herbert Babinger	27.07.17		b00	17-s229	M.Ruf	27.07.17	
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany					Tel.	Tel. : +49 8684 18-0			Page
www.rosenberger.de				Email : <u>info@rosenberger.de</u>			1 / 1		

RF 35/09.14/6.2