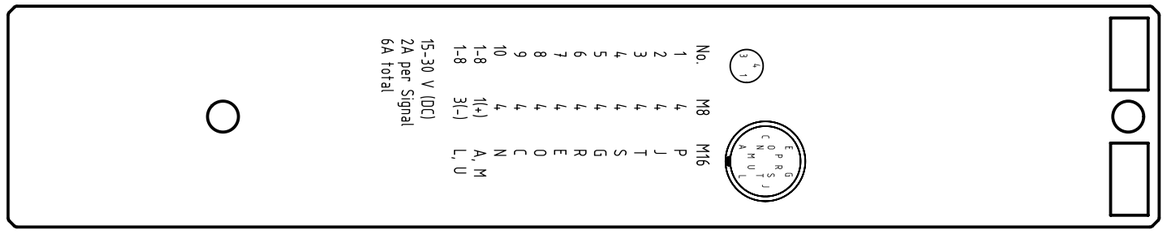

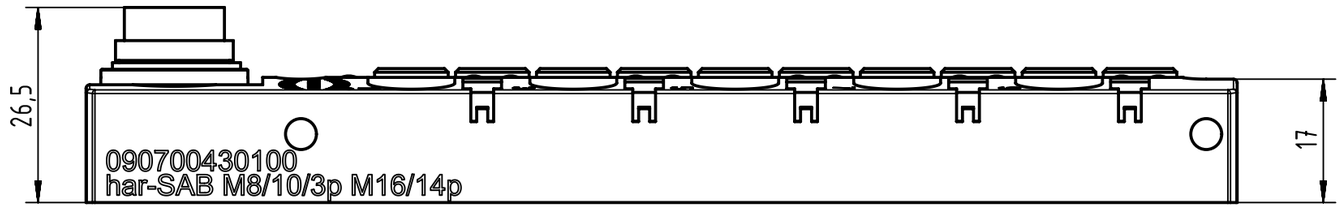

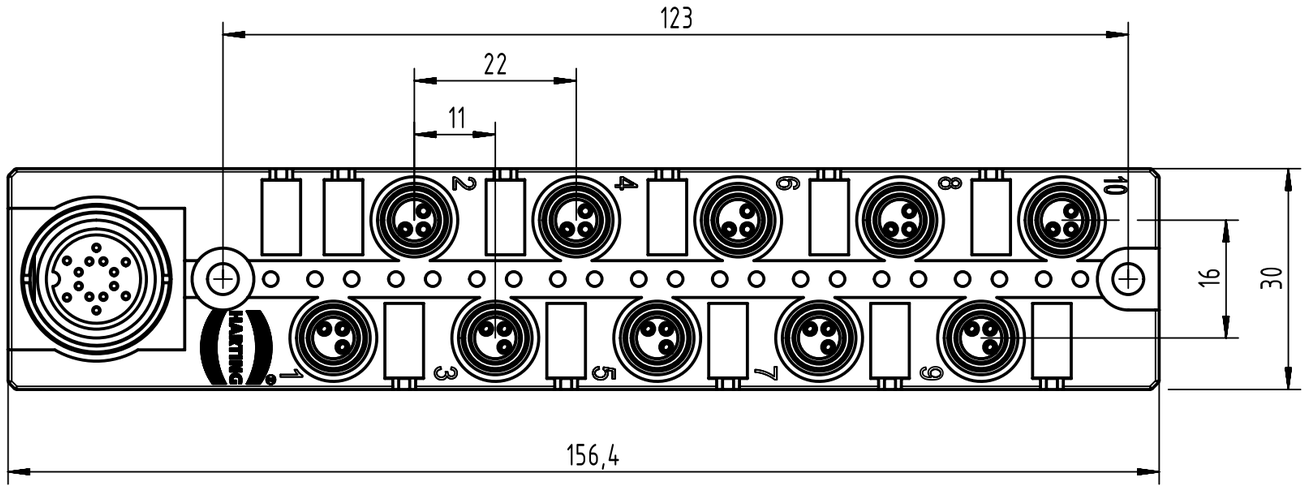

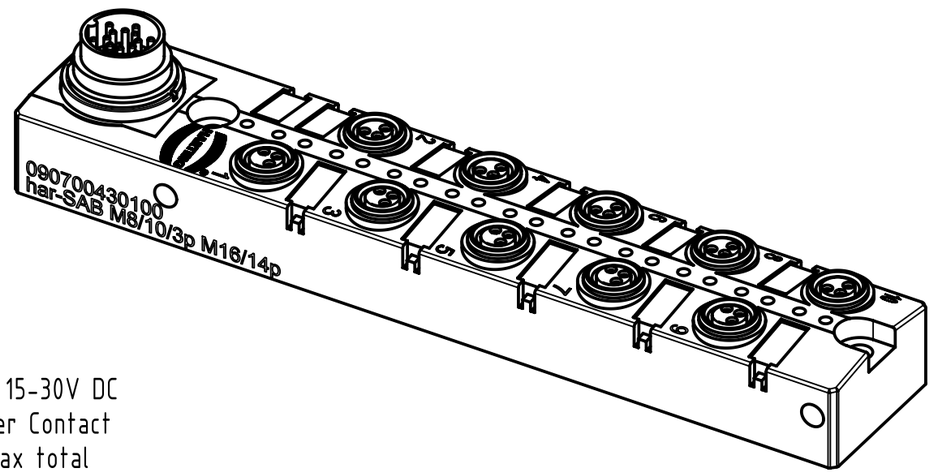

Electrical data:
-Rated voltage: 15-30V DC
-Nominal: 2 A per Contact
-Current: 6 A max total

Loading plan

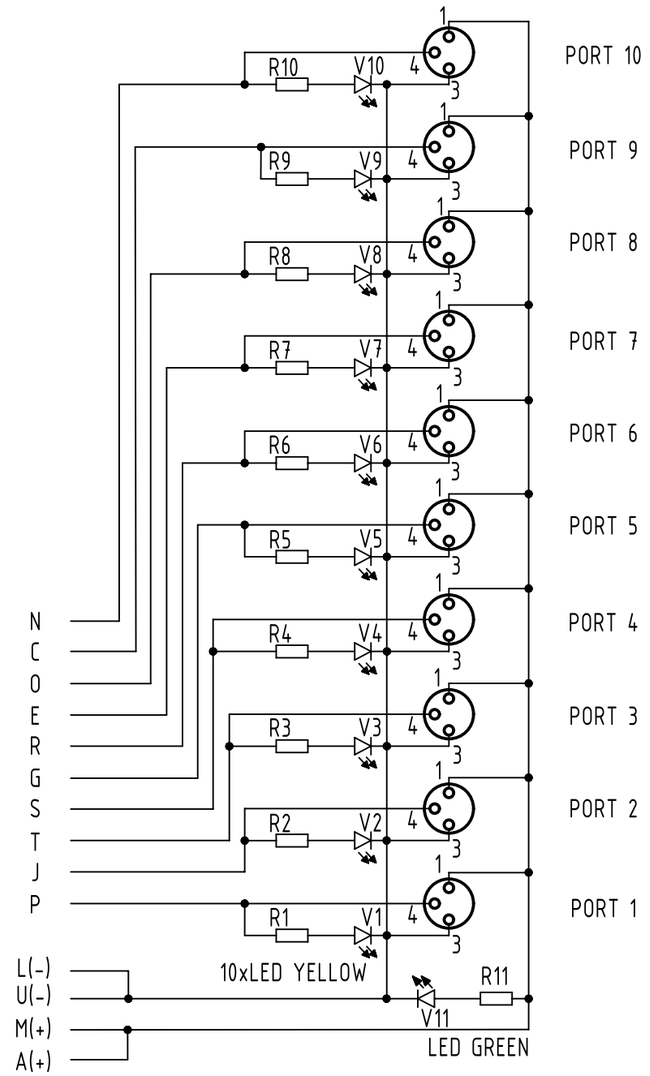

- Protection level: IP 67
- Temperature range: -20°C...+80°C

All Dimensions in mm	Tech. Character.	Free size tol.	According to production drawing

All rights reserved

Department HCS - RO	Created by COSTEA	Inspected by MUNTEANV	Standardisation AVRAM	Date 2017-09-14	State Final Release
HARTING Customised Solutions D-32427 Minden	Title har-SAB M8/10/3p M16/14p				Doc-Key / ECM-Nr. 100689725/UGD/000/C 500000125235
	Type TB	Number 090700430100			Rev. C / Page 1/1

A3