


ROHS COMPLIANT	
----------------	--

PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
Α	DCN 41727	10/15	DAL

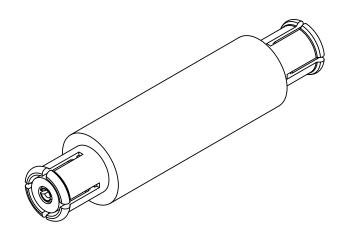

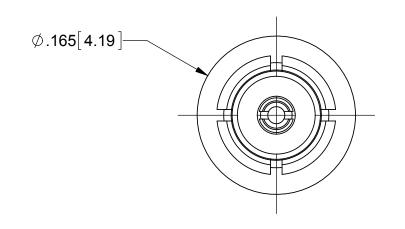

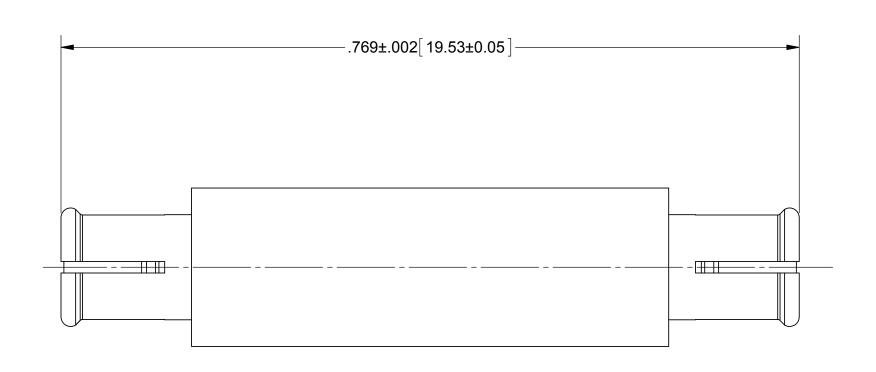

MATERIAL:

BODY & CONTACT:

BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04

PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B **INSULATOR:**

FINISH:

BODY & CONTACT:

GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE: FREQ. RANGE:

50 OHMS DC TO 40.0 GHz

MATERIAL:	SEE NOTES
FINISH:	SEE NOTES
SURFACE AF	rea: N/A
	PROPRIETARY
IS THE SOLE F ANY REPRODI WITHOUT THE	TION CONTAINED IN THIS DRAWIN ROPERTY OF SV MICROWAVE, IN JCTION IN PART OR AS A WHOLE WRITTEN PERMISSION OF /E, INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES:
FRACTIONAL: ±1/64 ANGULAR: X° ±1°C X°X' +15'
DECIMAL: .X ±.030
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994
THIRD ANGLE PROJECTION

HES TOLERANCES:	UNLESS OTHERWISE SPECIFIED
NGULAR: X° ±1°0' X°X' ±15'	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS.
AND TOLERANCES	SURFACE ROUGHNESS 63-MIL-STD-10. DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN T.I.R. REMOVE ALL BURRS

D ANGLE PROJECTION	DRAWN:	JMC 05/13/04
A 17	CHECKED:	STW 05/13/04
	APPROVED:	STW 05/13/04
Ψ	APPROVED.	3177 03/13



SMP FEMALE TO FEMALE **ADAPTER**

-	95077	DWG. NO. 1290-	4007
SCALE: 8:1			SHEET 10

1 OF 1