


1. Wiring Diagram.

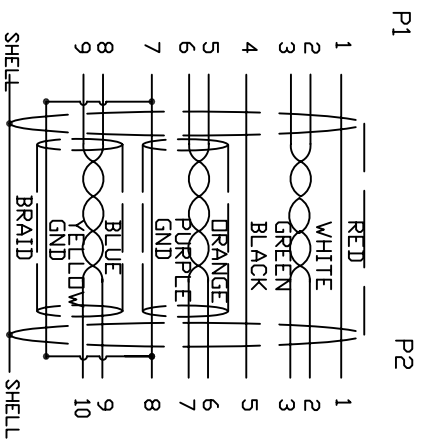

2. Cable test condition :

- Open / Short : 100%
 - Insulation resistance : 5M ohms
 - Contact resistance : 2 ohm
 - Hipot : DC 300V / 1 sec
3. Each pcs with PE polybag.

| | | | | | | | |
|-----|----------|---|-----|----------|--|-----------------|---------------------------------|
| 5 | CONN | USB3.0 MICRO B MALE G/F BLACK | 1 | P2 | A | INITIAL RELEASE | 2014/08/28 |
| 4 | PVC | 45P PVC BLACK OVERMOLD | 25g | | REV ECH# | | |
| 3 | PE | LLDPE 500026 6201 | 16g | | Cnc Tech, LLC DRAWN: WENC DATE: 08/24/14 CHECKED: EDWIN DATE: 08/24/14 APPROVAL: | | |
| 2 | CONN | USB3.0 A/M G/F BLUE | 1 | P1 | | | |
| 1 | CABLE | 《28AWG (7/0.127T) *1P+D(7/0.127T)+AL+M》*2+28AWG (7/0.127T) *1P+24AWG(7/0.2T)*2C+A+D+B (11/6/0.12AM) OD6.0 BLACK | 1 | 5000mm | TITLE | CUSTOMER P/N: | CABLE USB3.0 AM TO MICRO B MALE |
| NO. | PART NO. | DESCRIPTION | QTY | UNIT/REF | CHECKED | CUSTOMER: | REV A |
| | | BILL OF MATERIAL | | | EDWIN | 08/24/14 | SHEET 1 OF 1 |

