



Series: OMNI Antenna

Description: LTE 698-2690MHz Swivel Dipole

PART NUMBER: W5084x



Features:

- 698-2690MHz
- Omni radiation pattern in horizontal plane
- Gain 2/4 dBi
- Power rating 5W
- IP65
- Connector options:
 - W5084 TNC male
 - W5084K SMA male

Applications:

- LTE radios
- 2G/3G/4G radios
- Gateways, Routers, Set top boxes, Security, Metering
- IoT, M2M
- Optimized for straight and 90deg bent positions

All dimensions are in mm / inches

Issue: 1653

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551

Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



TECHNICAL DATA SHEET

Description: LTE 698-2690MHz Swivel Dipole

Series: OMNI Antenna

PART NUMBER: W5084x

ELECTRICAL SPECIFICATIONS

Frequency	698-960/1400-2690	MHz
Nominal Impedance	50	Ω
VSWR	2.5	Max
Average Efficiency(698-960MHz)	58	%
Average Efficiency(1400-2690MHz)	78	%
Peak Gain (698-960MHz)	2	dBi +/- 1 dB
Peak Gain (1400-2690MHz)	4	dBi +/- 1 dB
Polarization:	Vertical	
Power withstanding	5	W
Connector type	TNC male (SMA male is optional)	
Connector Options	W5084 TNC male connector	
	W5084K SMA male connector	



TECHNICAL DATA SHEET

Description: LTE 698-2690MHz Swivel Dipole

Series: OMNI Antenna

PART NUMBER: W5084x

MECHANICAL SPECIFICATIONS

Plastic radome ABS/PC

Color Black

Flammability UL94-V0

Ingress Protection IP65

Weight 65.9 g

Overall Length(W5084/W5084K) 228.84/223.24mm [9.01/8.79INCHES]

Position 0°. 45° & 90°

ENVIRONMENTAL SPECIFICATIONS

Operating temperature -40/+85 ° C

Storage Temperature -40/+85 ° C

Salt mist 96 hours






Series: OMNI Antenna


PART NUMBER: W5084x

MECHANICAL DRAWING

W5084 TNC male connector

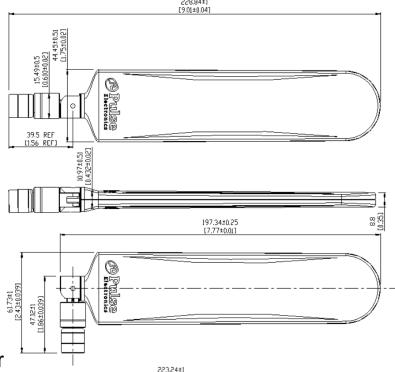

W5084K SMA male connector

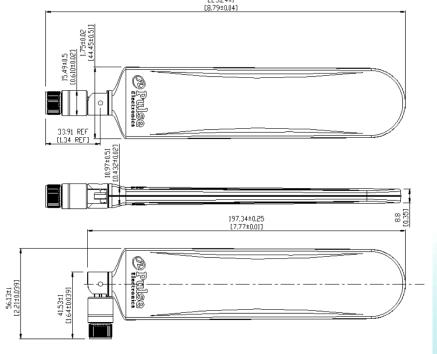

Issue: 1653

RoHS






Series: OMNI Antenna

PART NUMBER: W5084x

CHARTS

VSWR

VSWR vs Frequency measured in free space W5084X measured in PSU

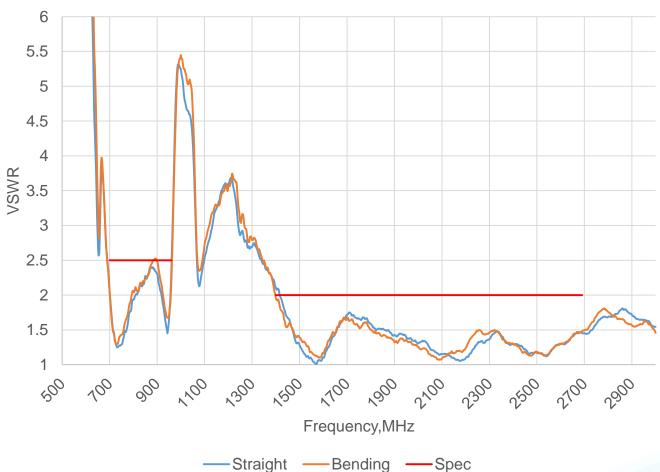









Series: OMNI Antenna

PART NUMBER: W5084x

CHARTS

Efficiency

Efficiency vs Frequency measured in free space W5084X measured in PSU







Series: OMNI Antenna

PART NUMBER: W5084x

CHARTS

Peak Gain

Peak Gain vs Frequency measured in free space W5084X measured in PSU










Series: OMNI Antenna

PART NUMBER: W5084x

CHARTS

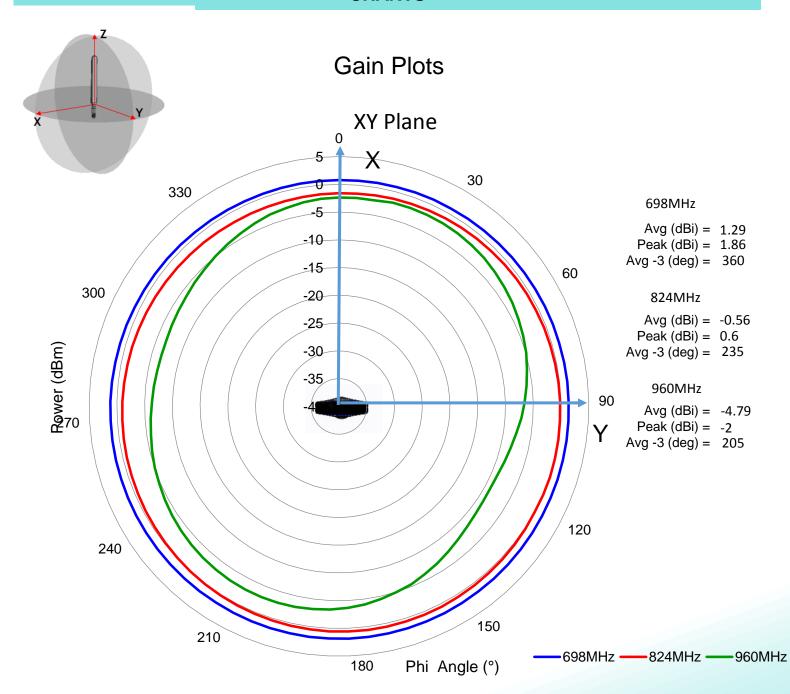






Series: OMNI Antenna

PART NUMBER: W5084x

CHARTS

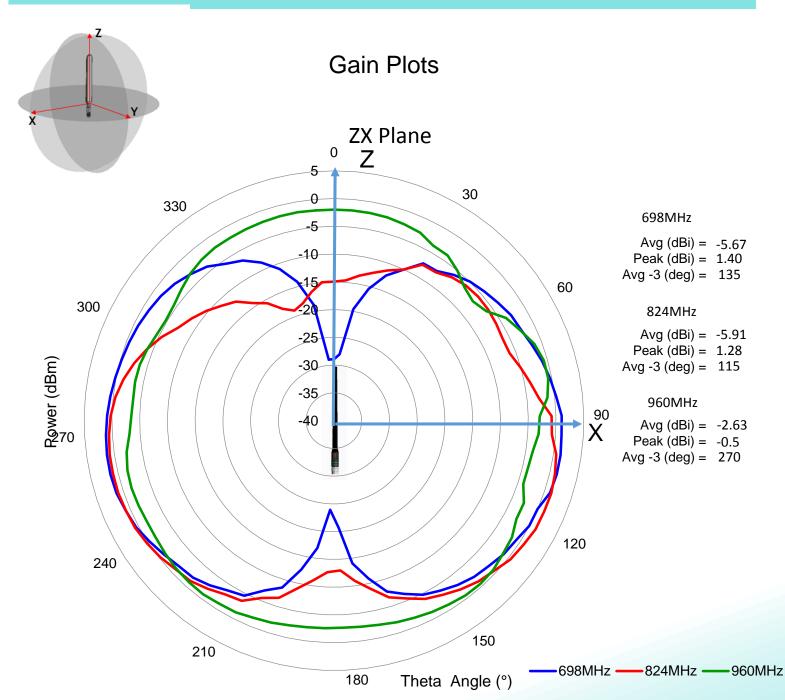








Series: OMNI Antenna

PART NUMBER: W5084x

CHARTS

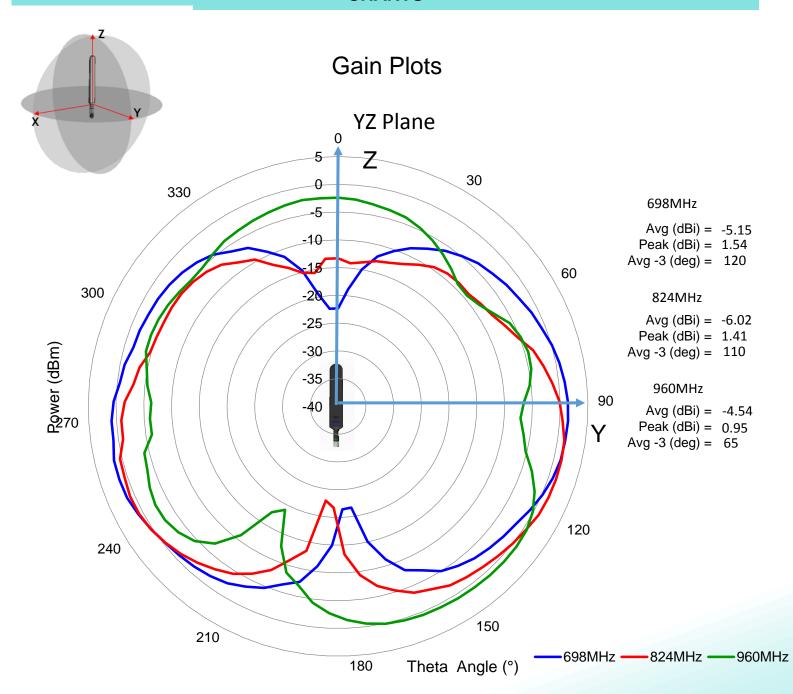






Series: OMNI Antenna

PART NUMBER: W5084x

CHARTS

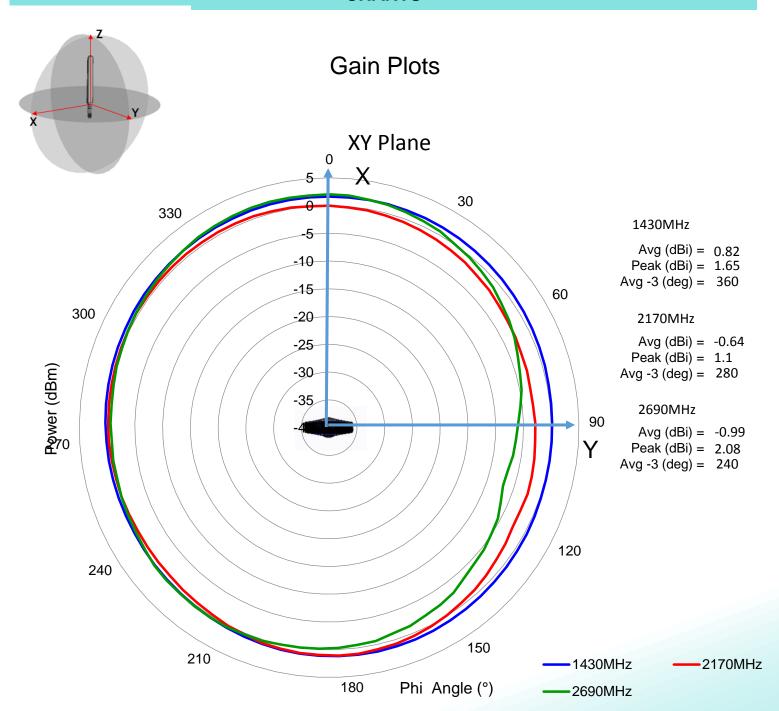








Series: OMNI Antenna

PART NUMBER: W5084x

CHARTS

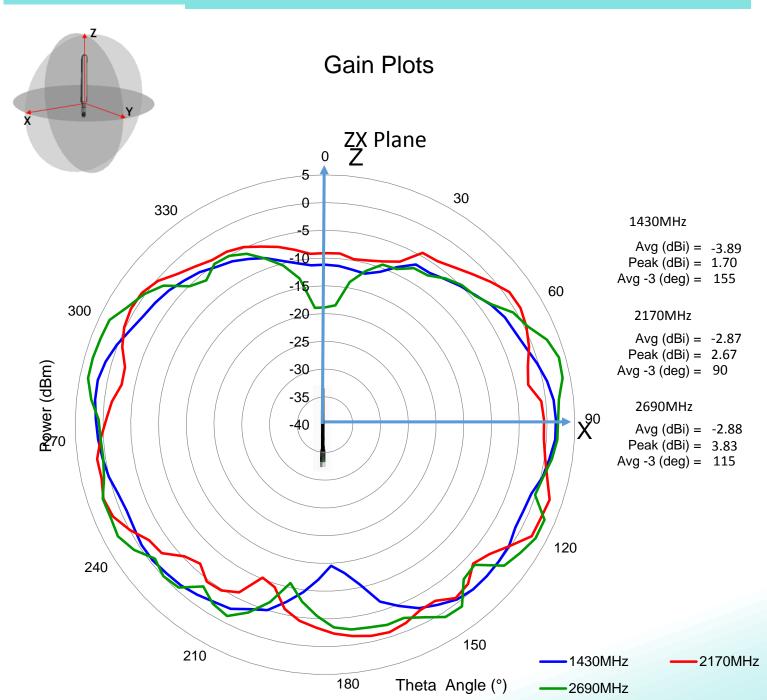








Series: OMNI Antenna

PART NUMBER: W5084x

CHARTS

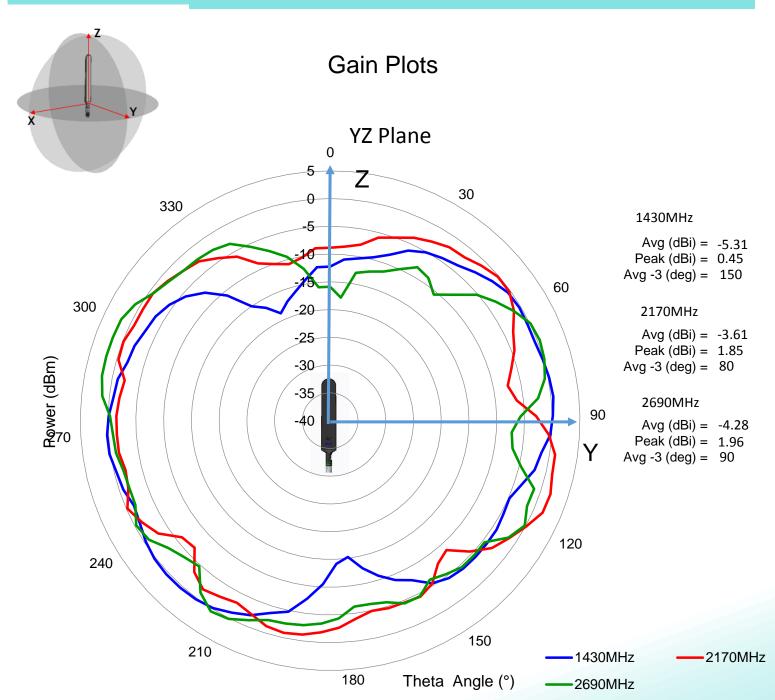





TECHNICAL DATA SHEET

Description: LTE 698-2690MHz Swivel Dipole

Series: OMNI Antenna

PART NUMBER: W5084x

PACKAGING

1PCS/PE bag 100PCS/Carton box

