


NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:
 INSULATOR: P.V.C. AVAILABLE IN BLACK OR RED.
 CONTACT: ANACONDA 7021 OR BOILCAT C97.
 GOLD PLATED.
 SOCKET: BRASS, TIN PLATED.

2. PERFORMANCE:
 MAXIMUM CURRENT: 13 AMPS
 MAXIMUM VOLTAGE: 300 V
 MAXIMUM TEMPERATURE: 122°F (50°C)

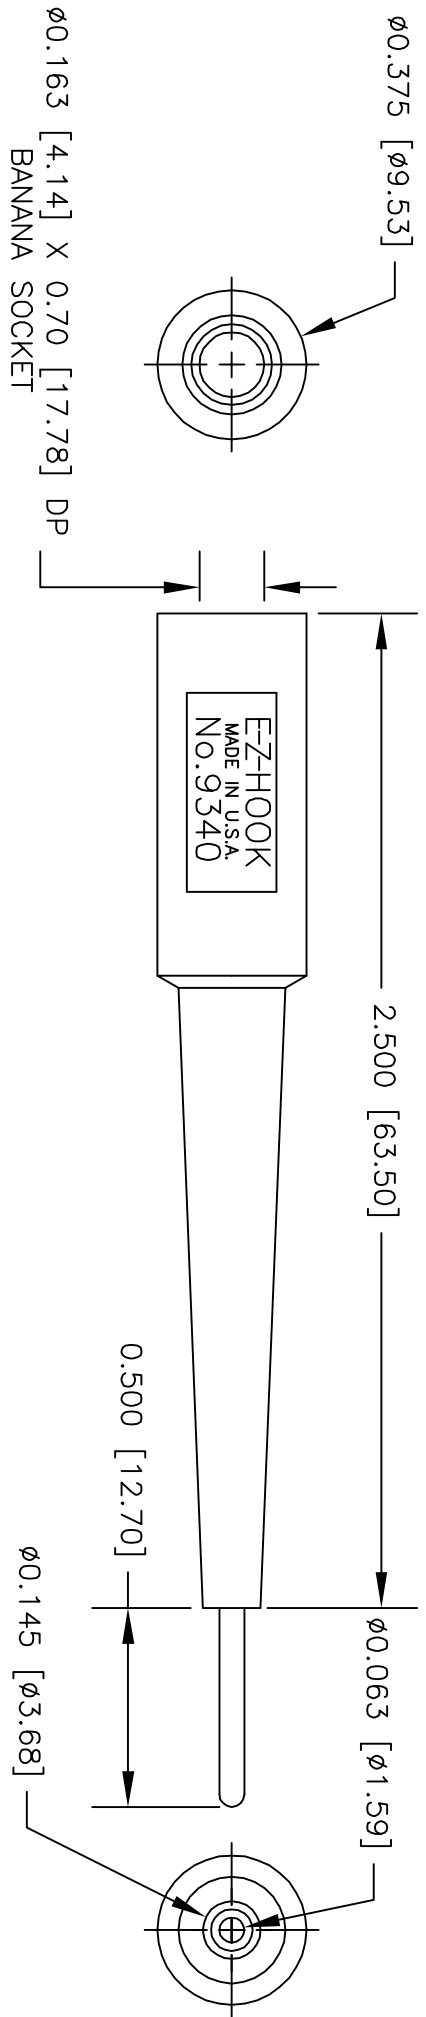

LTR	DESCRIPTION	REVISIONS	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± .XXX ±		CONTRACT NO.		DESCRIPTION	
MATERIAL SEE NOTE.		APPROVALS		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
FINISH SEE NOTE.		DRAWN		E-Z-FLEX BAN SKT TO 0.062 [1.57] PIN ADAPTER (16AWG)	
APPLICATION USED ON		APPROVED BY		SIZE CODE IDENT NO. DRAWING NO.	
DO NOT SCALE DRAWING		R.L.		A 08505 9340	
		DATE		SCALE	
		3/09		2:1	
				SHEET 1 OF 1	
				REV.	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO EZ-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF EZ-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.