

# ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

## UWF

Chip Type, Low Impedance



- Chip type, low impedance temperature range up to +105°C.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU).




UWG      Low Impedance      UWF      Low Impedance      UWT

### ■ Specifications


Item	Performance Characteristics								
Category Temperature Range	-55 to +105°C								
Rated Voltage Range	6.3 to 35V								
Rated Capacitance Range	1 to 220μF								
Capacitance Tolerance	±20% at 120Hz, 20°C								
Leakage Current	After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3 (μA), whichever is greater. Measurement frequency : 120Hz at 20°C								
Tangent of loss angle (tan δ)	Rated voltage (V)	6.3	10	16	25				
	tan δ (MAX.)	0.22	0.19	0.16	0.14				
Stability at Low Temperature	Measurement frequency : 120Hz								
	Rated voltage (V)	6.3	10	16	25				
	Impedance ratio Z-25°C / Z+20°C	2	2	2	2				
	ZT / Z20 (MAX.) Z-55°C / Z+20°C	4	4	3	3				
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C.								
	Capacitance change	Within ±20% of the initial capacitance value							
	tan δ	200% or less than the initial specified value							
	Leakage current	Less than or equal to the initial specified value							
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.								
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.								
	Capacitance change	Within ±10% of the initial capacitance value							
	tan δ	Less than or equal to the initial specified value							
	Leakage current	Less than or equal to the initial specified value							
Marking	Black print on the case top.								

### ■ Chip Type

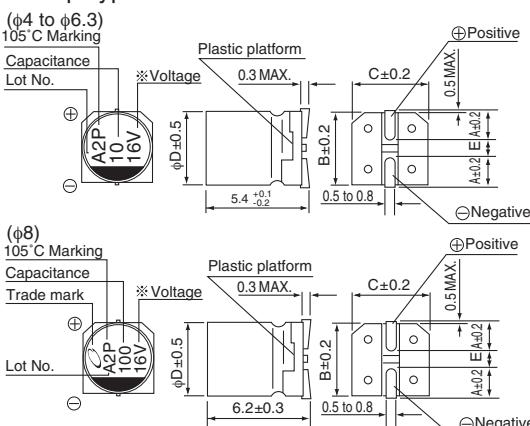

※ Voltage mark for 6.3V is 6V.

### Type numbering system (Example : 16V 10μF)

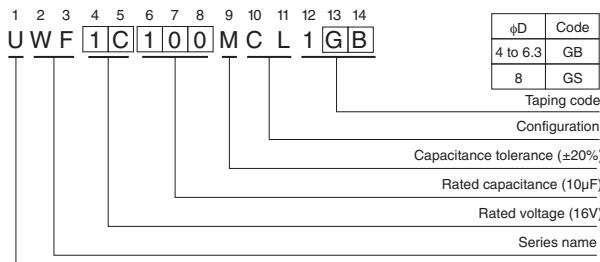

### ■ Dimensions

Cap. (μF)	V	6.3		10		16		25		35	
		Code	0J	Code	1A	Code	1C	Code	1E	Code	1V
1	010										4
1.5	1R5										4
2.2	2R2										4
3.3	3R3										4
4.7	4R7										4
6.8	6R8										4
10	100										5
15	150										5
22	220	4	5.0	50	5	2.6	80	5	2.6	80	4
33	330	5	2.6	80	5	2.6	80	6.3	1.3	115	5
47	470	5	2.6	80	6.3	1.3	115	6.3	1.3	115	5
68	680	6.3	1.3	115	6.3	1.3	115	8	0.8	150	8
100	101	6.3	1.3	115	8	0.8	150	8	0.8	150	
150	151	8	0.8	150	8	0.8	150				
220	221	8	0.8	150							

Max. Impedance (Ω) at 20°C 100kHz  
Rated ripple current (mA rms) at 105°C 100kHz

### ● Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.35	0.50	0.64	0.83	1.00

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please select UUJ(p.158) if high C/V products are required.
- Please refer to page 3 for the minimum order quantity.