
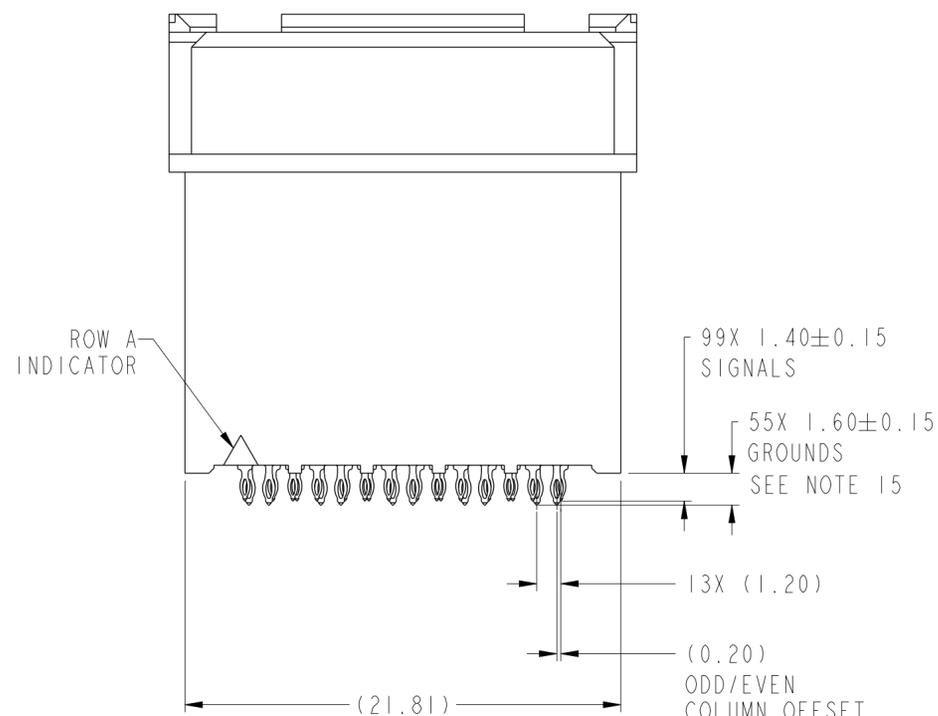
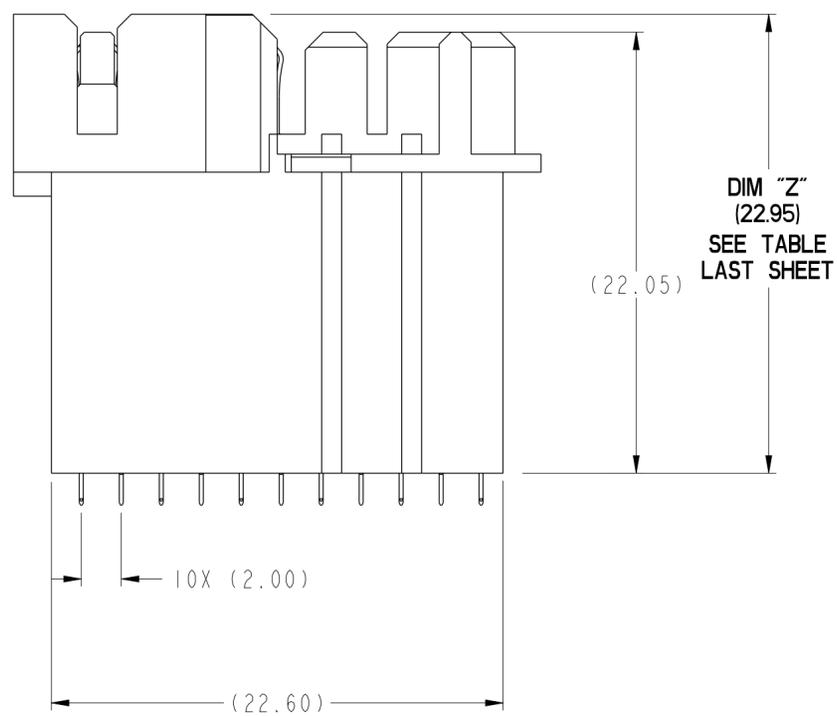



SEE NOTE 5  
SEE NOTE 11

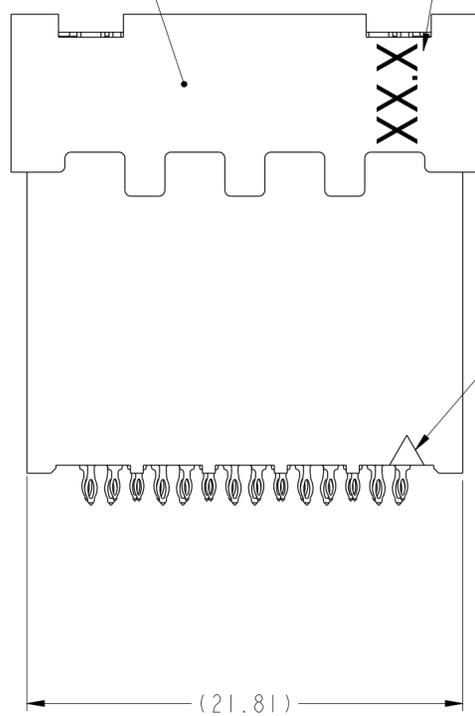


Amphenol  
FCi

© 2016 AFci

spec ref	SEE NOTES	dr	Will Liu	2014/09/16	projection	mm	size	A2	scale	4:1							
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	David Guo	2018/01/30		mm	A2	-	-	-							
ASME Y14.5M		chr	-	cat. no.							Product - Customer Drw	sheet 1 of 4					
surface	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±0.3</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±0.10</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±0.05</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±2°</td> </tr> </table>	linear	0.X	±0.3								0.XX	±0.10		0.XXX	±0.05	angular
linear	0.X	±0.3															
	0.XX	±0.10															
	0.XXX	±0.05															
angular	0°	±2°															

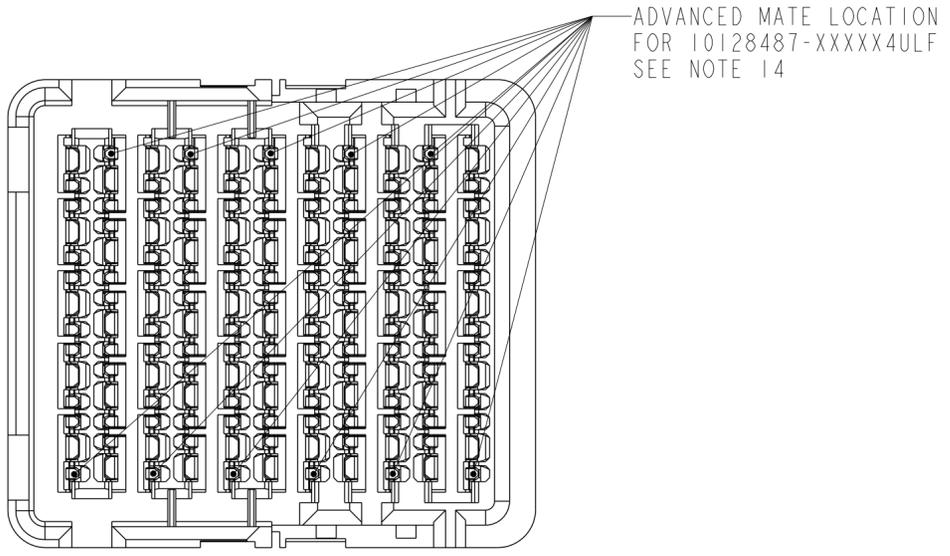

ADVANCED MATE LAYOUT FOR 10128487-XXXXX4ULF

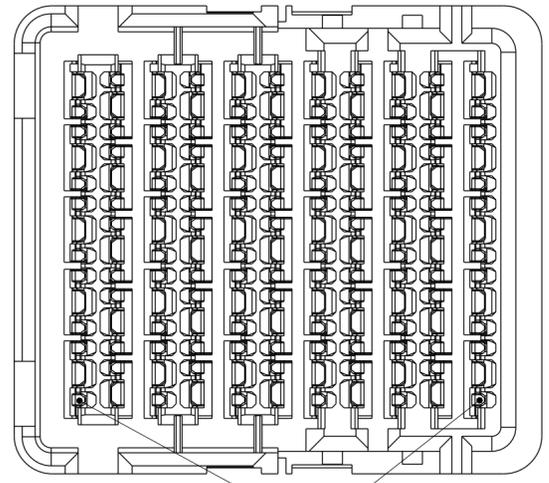


STANDARD SHORT DETECT LAYOUT FOR 10128487-XXXXX1ULF

Amphenol FCI

© 2016 AFCI

spec ref	SEE NOTES	dr	Will Liu	2014/09/16	projection	mm	size	A2	scale	4:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	David Guo	2018/01/30			ecn no	-		
ISO 406		chr	-	rel level			Released			
ISO 1101		appr	Heaven Cen	2018/01/30			product family	ExaMEZZ		
surface	linear	0.X	±0.3		title ExaMEZZ CONNECTOR ASSEMBLY HERMAPHRODITIC, 4 PAIR, 11 IMLA		dwg no	10128487	rev	A
		0.XX	±0.10		cat. no.	-	Product - Customer Drw	sheet 2 of 4		
	angular	0°	±2°							


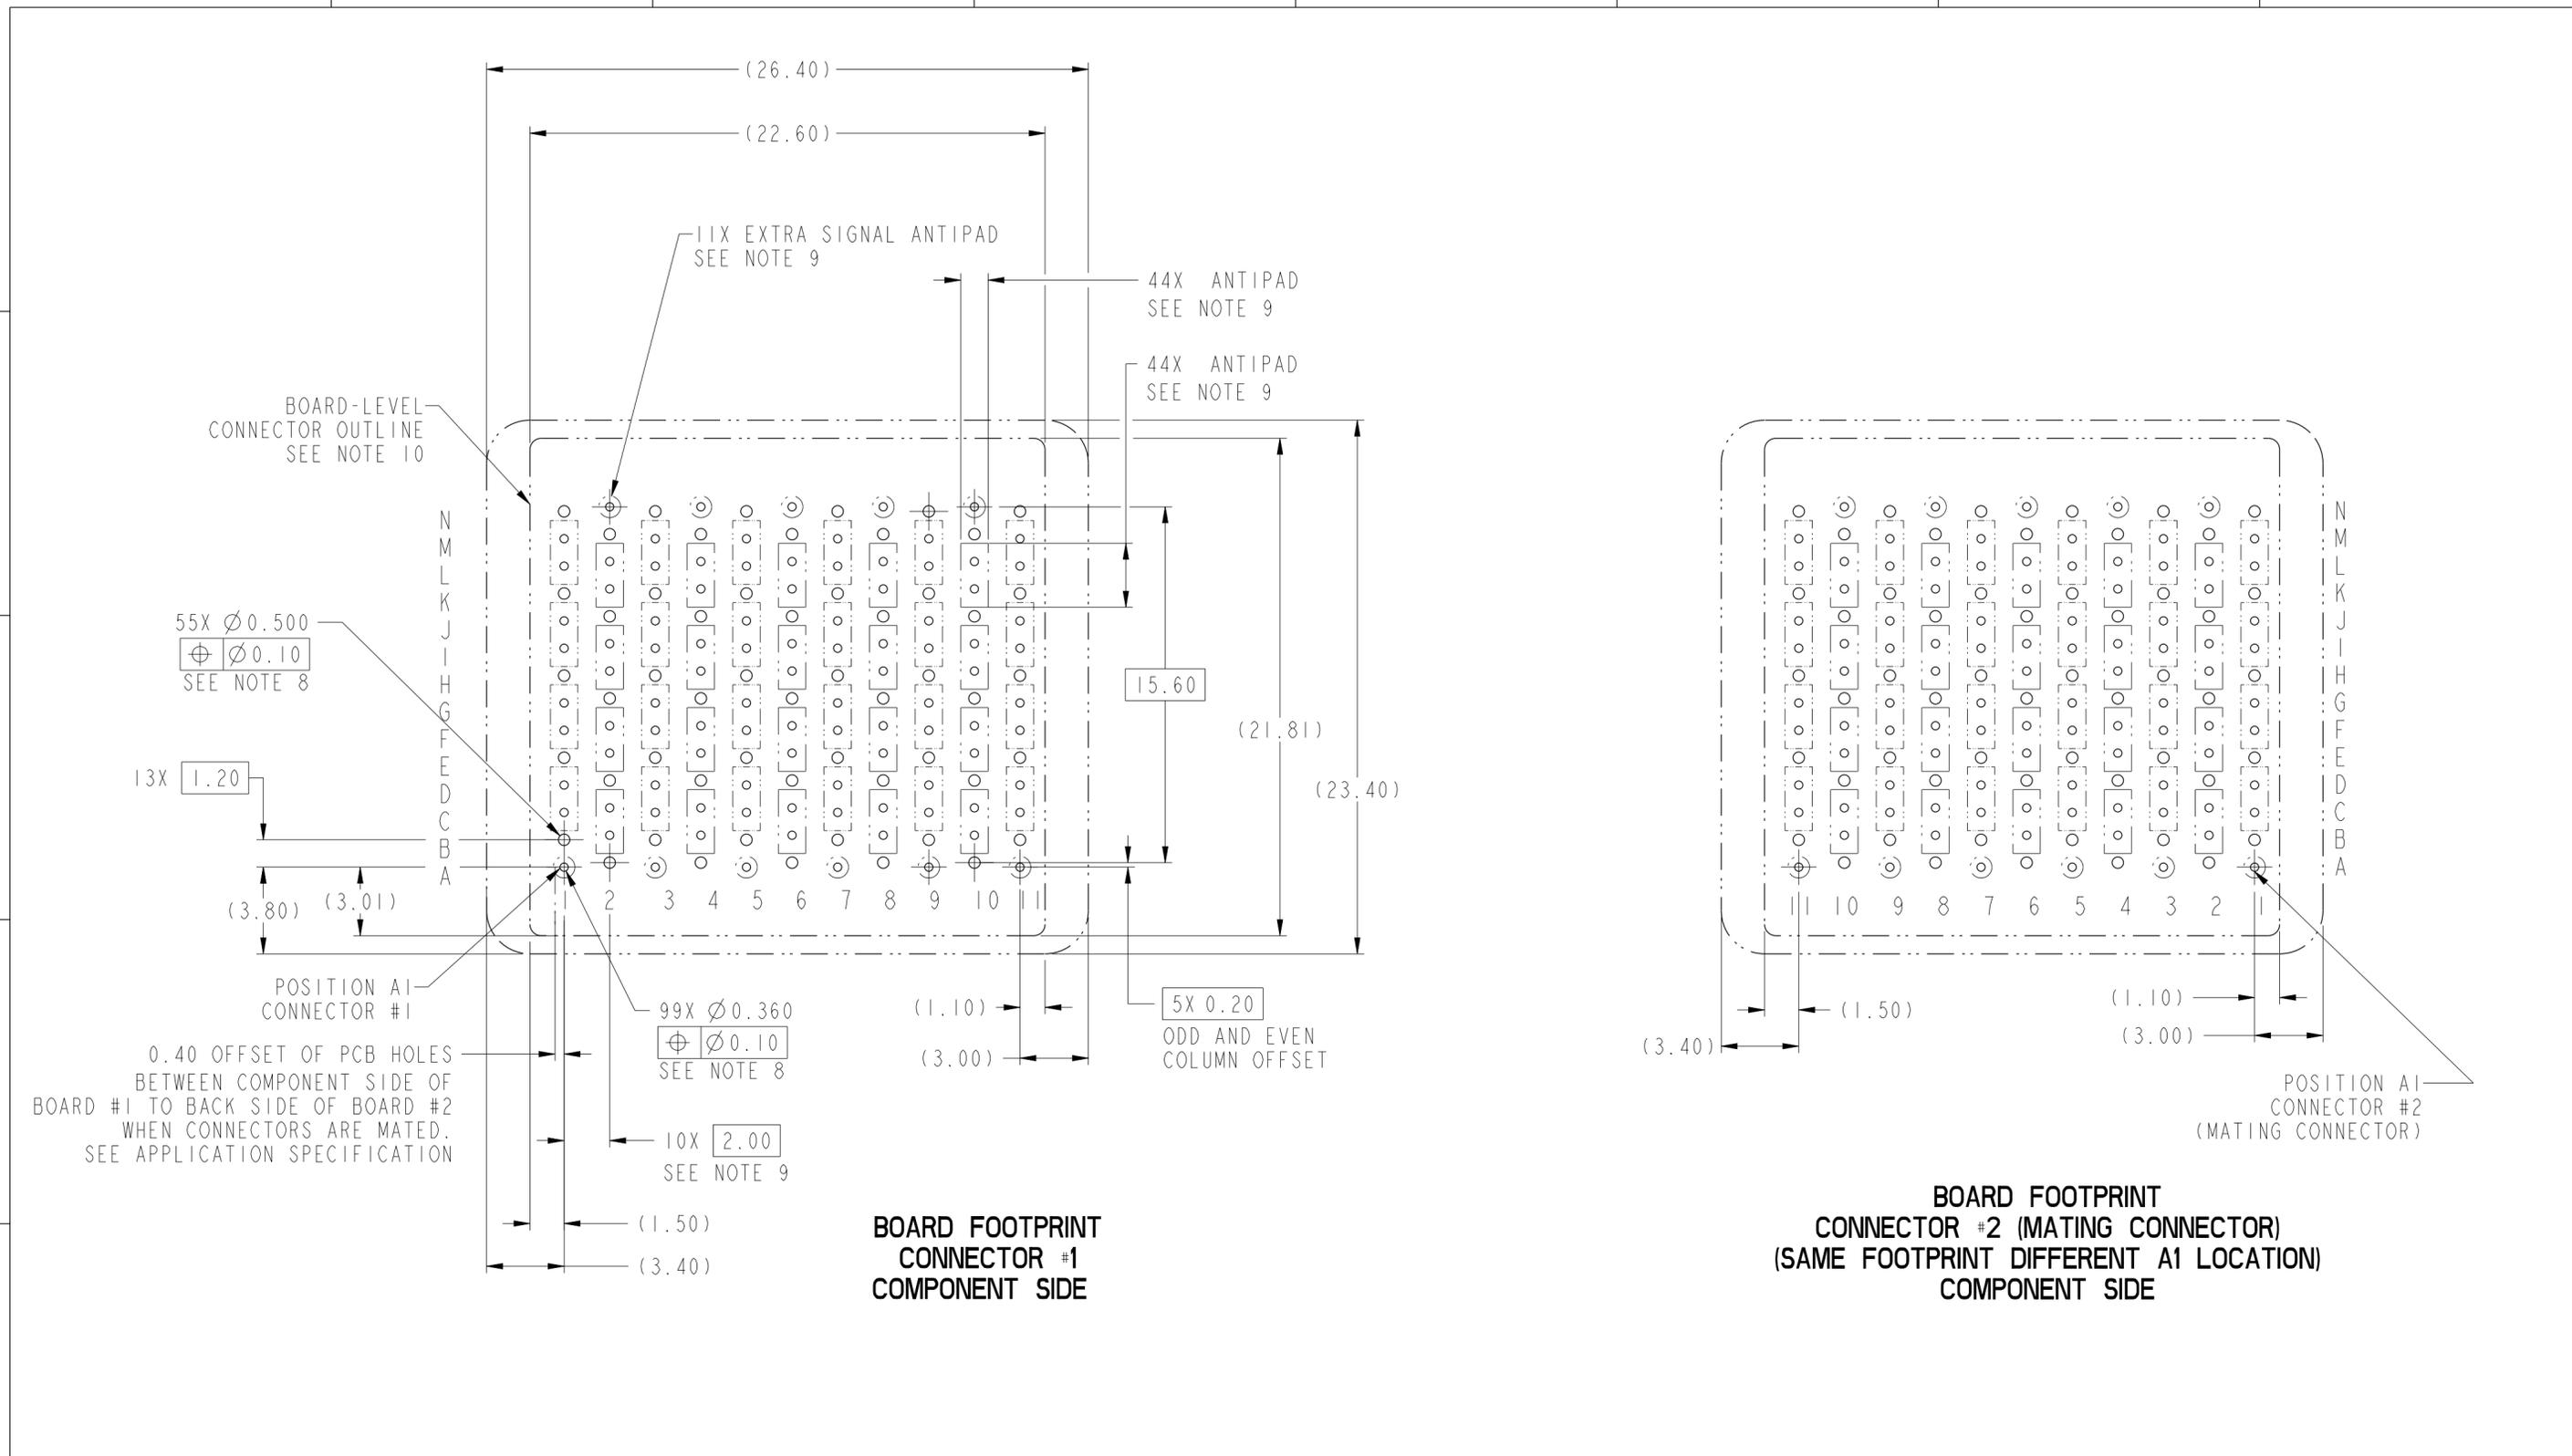


10128487-119500ULF  
RECOMMENDED PCB LAYOUT  
SCALE 5:1

spec ref	SEE NOTES	dr	Will Liu	2014/09/16	projection	mm	size	A2	scale	4:1												
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	David Guo	2018/01/30		mm	ecn no	-	rel level	Released												
ASME Y14.5M		chr	-	apppr							Heaven Cen	2018/01/30	product family	ExaMEZZ								
surface	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±0.3</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±0.10</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±0.05</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±2°</td> </tr> </table>	linear	0.X	±0.3		0.XX	±0.10		0.XXX	±0.05	angular	0°	±2°			title ExaMEZZ CONNECTOR ASSEMBLY HERMAPHRODITIC, 4 PAIR, 11 IMLA		drwg no 10128487	rev A	cat. no. -	Product - Customer Drw	sheet 3 of 4
linear	0.X	±0.3																				
	0.XX	±0.10																				
	0.XXX	±0.05																				
angular	0°	±2°																				

PRODUCT NUMBER	STACK HEIGHT EACH SIDE	DIM "Z"	ADVANCED MATE	SHORT DETECTS
10128487-119500ULF	19.5 mm	22.95	NO	NO
10128487-119501ULF	19.5 mm	22.95	NO	YES
10128487-119504ULF	19.5 mm	22.95	YES-ALL COLUMNS	NO
10128487-107500ULF	7.5 mm	10.95	NO	NO

- 1 - CONNECTOR MATERIALS:  
HOUSING: HIGH TEMP THERMOPLASTIC, NATURAL, UL94-V0  
IMLA PLASTIC: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0  
CONTACT: COPPER ALLOY
- 2 - CONTACT PLATING:  
SEPARABLE INTERFACE:  
PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-1150 INCLUDING TELCORDIA GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE TEST SEQUENCE.  
  
PRESS-FIT TAILS: TIN OVER NICKEL
- 3 - PRODUCT SPECIFICATION: GS-12-1150
- 4 - APPLICATION SPECIFICATION: GS-20-0373
- 5 - PRODUCT MARKING (PART NUMBER & LOT CODE) ON THIS SURFACE.
- 6 - LEAD FREE PRODUCT MEETS THE EUROPEAN UNION DIRECTIVES & OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004.
- 7 - PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION.
- 8 - REFER TO CUSTOMER DRAWING 10119933 FOR INFORMATION ON PCB HOLE DIAMETERS AND PLATING OPTIONS
- 9 - REFER TO ROUTING GUIDE GS-20-0511 FOR RECOMMENDATIONS ON OPTIMIZATION OF FOOTPRINT AND TRACE ROUTING LAYOUT.
- 10 - CONNECTOR OUTLINE MAY BE SCREEN PRINTED ONTO CUSTOMER PCB TO BE USED AS A GUIDE FOR MANUAL CONNECTOR PLACEMENT.
- 11 - PRODUCT STACK HEIGHT (EG. 19.5) LASER MARKED ON THIS SURFACE.
12. THE HOUSING WILL WITHSTAND EXPOSURE TO 260 °C PEAK TEMPERATURE FOR 10-30 SECONDS IN A CONVECTION, INFRA-RED, OR VAPOR PHASE REFLOW OVEN.
- 13 - THE SHORT DETECT CONNECTOR (WHEN MATED WITH A NON-SHORT DETECT CONNECTOR) WILL PROVIDE CONTACTS THAT MATE 1.00mm AFTER THE REMAINDER OF STANDARD LENGTH SIGNAL AND GROUND CONTACTS MATE. NEVER MATE A SHORT DETECT CONNECTOR WITH ANOTHER SHORT DETECT CONNECTOR.
- 14 - THE ADVANCED MATE CONNECTOR WHEN MATED WITH AN ADVANCED MATE CONNECTOR, WILL PROVIDE CONTACTS THAT MATE 0.75MM BEFORE THE REMAINDER OF THE SIGNAL AND GROUND CONTACTS MATE
- 15 - ALL GROUND CONTACTS WITHIN A COLUMN ARE COMMONED.

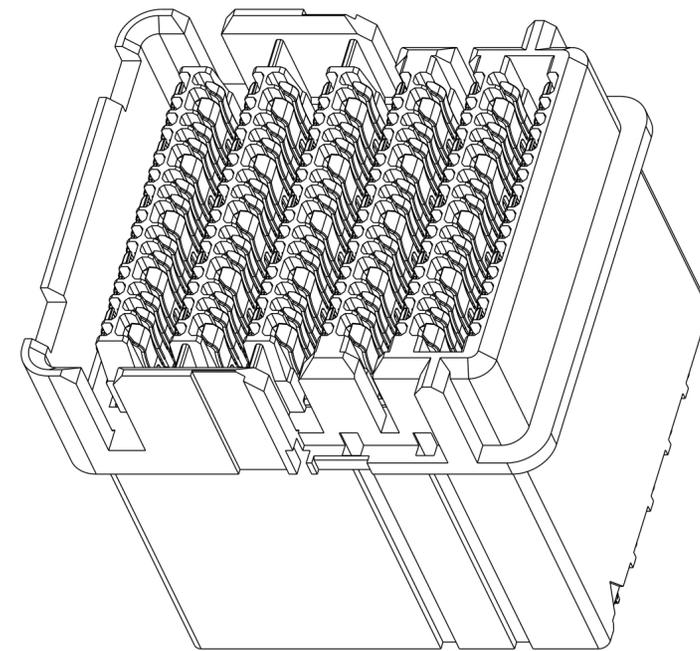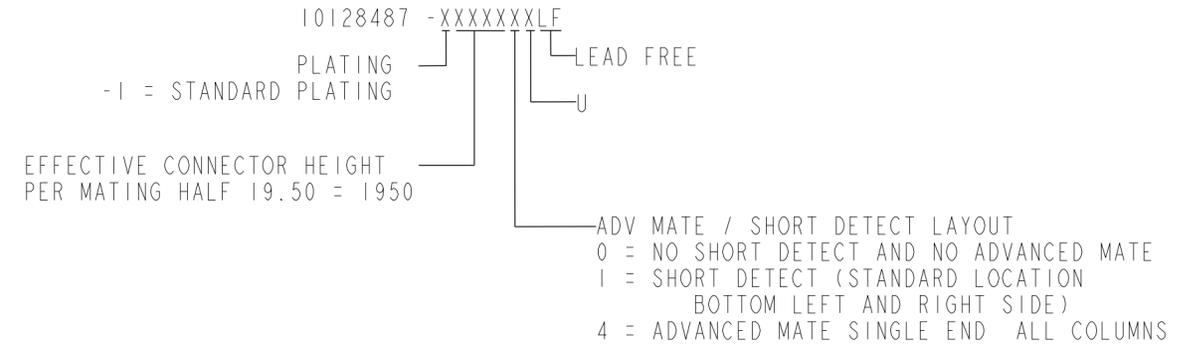

spec ref	SEE NOTES	dr	Will Liu	2014/09/16	projection	mm	size	A2	scale	4:1												
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	David Guo	2018/01/30			ecn no	-	<b>Released</b>	rel level												
ASME Y14.5M		chr	-	2018/01/30			product family	ExaMEZZ														
surface	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±0.3</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±0.10</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±0.05</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±2°</td> </tr> </table>	linear	0.X	±0.3		0.XX	±0.10		0.XXX	±0.05	angular	0°	±2°	appr	Heaven Cen	2018/01/30	Amphenol FCI	title	ExaMEZZ CONNECTOR ASSEMBLY	cat. no.	-	Product - Customer Drw
linear	0.X	±0.3																				
	0.XX	±0.10																				
	0.XXX	±0.05																				
angular	0°	±2°																				
							dwg no	10128487		sheet 4 of 4												
							rev	A														

PDS: Rev :A

STATUS:Released

Printed: Jan 30, 2018