


Specification Control Drawing

100F1121 Issue 9 1st July 2009

Page 1 of 2 Page 2 is for internal use only

TWO CONDUCTOR CABLE, HALOGEN FREE, SHIELDED AND JACKETED 250 VOLT AC IN ACCORDANCE WITH NF F 63-808, TEMPERATURE CLASSIFICATION 105°C (Suitable for use at an operating voltage of 750/1300 VOLTS AC)

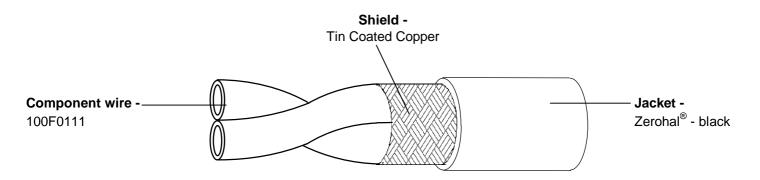

| Part | NFF 63808 | Cross | Shield | Optical | Jacket | | Overall Diameter (mm) | | | Weight | |
|-------------|--------------------------------|-----------|--------|----------|-----------|------|-----------------------|--------|-------|--------|------|
| Description | Designation | Sectional | Size | Shield | Thickness | | Lower | | Upper | kg/km | |
| | | Area | (mm) | Coverage | (mm) | | Spec | Target | Spec | | |
| | | (mm²) | | Min. | Min. | Nom. | Limit | | Limit | Nom. | Max. |
| 100F1121-20 | E 250-S-BLG-2 x 0.60-NFF 63808 | 0.60 | 0.13 | 90% | 0.35 | 0.46 | 4.28 | 4.50 | 4.70 | 33.4 | 36.1 |
| 100F1121-18 | E 250-S-BLG-2 x 0.93-NFF 63808 | 0.93 | 0.13 | 95% | 0.35 | 0.45 | 4.71 | 4.95 | 5.20 | 44.6 | 48.2 |
| 100F1121-16 | E 250-S-BLG-2 x 1.34-NFF 63808 | 1.34 | 0.13 | 94% | 0.35 | 0.45 | 5.27 | 5.53 | 5.80 | 54.4 | 59.9 |
| 100F1121-14 | E 250-S-BLG-2 x 1.82-NFF 63808 | 1.82 | 0.13 | 95% | 0.35 | 0.45 | 5.88 | 6.18 | 6.49 | 70.4 | 76.5 |

COLOUR CODE: Insulation colour determined by conductor cross sectional area

as defined by 100F0111 SCD.

PERFORMANCE

The complete requirements for procuring the wire described herein shall consist

REQUIREMENTS: of this document and NF F 63-808 Mai 1992

Optical shield coverage tested in accordance with WCD 51 clause 5.4.

MARKING

REQUIREMENT:

Components: Spaced at 50mm maximum, longitudinally, coloured black,

First core only: E # - NF F 63-808 - TE Raychem -YY

Second core: marked 2

Jacket: Spaced at every 50mm maximum, longitudinally, coloured white,

E - BLG - 2 x # - NF F 63-808 - TE Raychem - YY - B

Where: "#" = conductor cross sectional area (see above)

"YY" = the Year Code Designator in accordance with table below

and "B" = Manufacturing Batch Number.

| Code: | 09 | 10 | 11 | 12 | 13 | 14 | 15 |
|-------|------|------|------|------|------|------|------|
| Year: | 2009 | 2010 | 2011 | 2012 | 2013 | 2014 | 2015 |

APPROVAL: Electronic sign off - no signatures will appear.

Tyco Electronics UK Ltd Faraday Road Dorcan SWINDON SN3 5HH Registration Number: 550926 London, England

This drawing and the information set forth hereon are the property of Tyco Electronics UK Ltd, and are to be held in trust and confidence. Publication, duplication, disclosure or use for any purpose not expressly authorised in writing by Tyco Electronics UK Ltd is prohibited.

'Zerohal' is a registered trademark of Tyco Electronics Corporation.

This specification sheet takes precedence over documents referenced herein. As Tyco Electronics UK Ltd. reserve the right to make changes in construction without notice please contact Tyco Electronics UK Ltd to ensure that this document is the latest issue