### **NDIR12HT** Details PDF





### NDIR12HT

art Number:	
anufacturer/Brand:	
roduct description	
atasheets:	
oHs Status	
hip From	
hipment Way	

# NDIR12HT APEM Inc. SWITCH SLIDE DIP SPST 25MA 24V NDIR12HT.pdf Lead free / RoHS Compliant Hong Kong DHL/Fedex/TNT/UPS/EMS

### **REQUEST FOR QUOTATION**

Image may be representation. See specifications for product details.


PART NUMBERNIR12HTMANUFACTURERAFEM Inc.DESCRIPTONSUNTCH SLIDE DIP SPST 25MA 24VLEAD FREE STATUS / ROHE STATUSLead free / RohlS CompliantDATA SHETGNORL2HT.odfWASHABEVaVCVUTAGE RATINGVAVCSERISNOTPICH0.00° (2.51mm), fullPICAGINGVGVOLTAGE RATINGSCVOLTAGE RATINGSCNUMBER OF POSITIONSSCMOUTING TYPESCMOUTING TYPESCMOUTING TYPESCMOUTING TYPESCMOUTING TYPESCLEAD FREE STATUS / RONS STATUSSCLEAD FREE STATUS / RONS STATUSSCLE		Specifications of NDIR12HT
NNUFACTURERAPEM Inc.DESCRIPTIONSWITCH SLIDE DIP SPST 25MA 24VLEAD FAEE STATUS / ROHS STATUSLead free / RohS CompliatDATA SHEETSWISH 25LT.pdfVIASHABLEYesVIATAGE MATING24VDCTERNINATION STYLEDI 100° (2.54mn), FullPRICA1.00° (2.54mn), FullPRICA0.10° (2.54mn), FullPRICA0.10° (2.54mn), FullPRICAGING100° (2.54mn), FullMURER OF POSITIONS12MURER OF FOSITIONS12MURER OF FOSITIONS12LIDAT FUEL (MSL)0.00° QelsLIDAT FUEL STATUS / ROMS TATUS100° QuelsLIDAT FUEL STATUS / ROMS TATUS100° QuelsELETRAL LIFE3.00° QuelsLIDAT FUEL (MSL)100° QuelsLIDAT FUEL STATUS / ROMS TATUS100° QuelsLIDAT FUEL LIFE3.00° QuelsCURTAT FUEL LIF		
DeSCRIPTIONSWITCH SLIDE DP SPST 25MA 24VLEAD FREE STATUS / ROHS STATUSExd FR / ROHS CompliantDATA SHEETIN DR121T.pdfWASHABLEYesVOLTAGE RATING24VDCTERMINATION STATUERC PinSRITSSNDIPITCH0.000 (2.54mm), FullPORATING TEMPERATURE2000 CASOOPERATING TEMPERATURE2000 CASONUMBER OF POSITIONS12MOUTING TEMPERATURE2000 CASONUMERE OF POSITIONS12ELEGATA STATUS / ROHS STATUS2000 CASOLIGHT ABOVE BOARD2000 CASOLIGHT ABUVE2000 CASO	PART NUMBER	NDIR12HT
LEAD FREE STATUS / RONES STATUSLead free / RoHS CompliantDATA SHEETR NDR12HT.cdWASHABLEVeVOLTAGE RATINGAVOCTERMINATION STYLER PinSERIESNDIPTCH0.100° (2.54mm), FullPACAGINGVu®OPERATING TEMPERATURE20°C ~ 85°CNUMEER OF POSITIONS12MOUTING TYPERough HoleMOUTING TYPE1000 (2.64mm), FullMOUTING TYPE1000 (2.64mm) FullMOUTING TYPE2000 (2.64mm) FullMOUTING TYPE1237° (3.140m)ELEGTATIONS FORTUS124° (2.64mm) FullELEGTATIONS FORTUS126° (2.64mm) FullCURRENT RATING0.900 (2.65mm) FullCURRENT RATING0.900 (2.65mm) FullCURRENT RATING0.900 (2.65mm) FullCURTUT FULSI0.900 (2.65mm) FullCURTUT FU	MANUFACTURER	APEM Inc.
DAT SHEFTRolR12tTudfVASHABLEYesVOLTACE RATING4V0CTERMINATION STYLEPINSERESNOPITCH0.00° (2.54mm), FullPACAGING20°C ~ 85°CNUMBER OF POSITIONS20°C ~ 85°CMOMER OF POSITIONS10MOSTURE SENSITIVITY LEVE (MSL)10/Unimed/MOSTURE SENSITIVITY LEVE (MSL)10/Unimed/LEGAHA2.00°C/deSLINGTH2.00°C/deSLINGTA1.21°C (ASTON)LEGAT HASONE BOARD2.01°C (ASTON)LEGAT LIFE3.01°C (ASTON)LEGAT LIFE3.01°C (ASTON)LEGAT LIFE3.02°C (ASTON)LEGAT LIFE3.02°C (ASTON)LEGAT LIFE3.02°C (ASTON)LEGAT LIFE3.02°C (ASTON)LIGAT AND SE BOARD3.02°C (ASTON)CATACE AND SE AN	DESCRIPTION	SWITCH SLIDE DIP SPST 25MA 24V
NSABABLEYesVOTAGE RATING4V0CTEMINATION STYLECPINSERIESNDPTCH0.00(2.54mm, FullPACKAGINGVBOPERATING TEMPERATURE-00°C 45°CNUMBER OF POSITIONS10MUNTING TYPE100(10)MOUNTING TYPE100(10)MOUNTING TYPE0.00 (AlgMECHANICAL LIFE0.00 (AlgLIGHT1.01°CHEGHT ABOVE BOARD1.01°CFEATURES1.01°CFEATURES0.00 (AlgLIGTRI CI LIFE0.00 (AlgMECHANICAL LIFE0.00 (AlgMECHANICAL LIFE0.00 (AlgFEATURES0.00 (AlgFEATURES0.00 (AlgFEATURES0.00 (AlgRECTRICAL LIFE0.00 (AlgMERIENTINT0.00 (AlgMERIENTINT0.00 (AlgMERIENTING0.00 (AlgMERIENTIN	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
VCITAGE RATING24VCTERMINATION STYLEPC PASERIESNOIPTCH0.00°(2.54m), FullPACKAGINGTobOPERATING TEMPERATURE-0°C + 6°CNUMERC OF POSITIONS1MUNTING TYPE1000 (Jang)MOSTURE SENSITIVITY LEVEL (MSL)1000 (Jang)LEAGTH2.000 (Jang)LEAGTH2.000 (Jang)LEAGTH2.000 (Jang)LEAGTH2.000 (Jang)LEAGTH2.000 (Jang)LEAGTH2.000 (Jang)LEAGTAL LIFE3.000 (Jang)LEAGTAL LIFE3.000 (Jang)LEATALED ASCARDANCION1.300 (Jang)LECTRICAL LIFE3.000 (Jang)CUTARENTATING3.000 (Jang)CUTARENTATING3.000 (Jang)CUTARENTALING3.000 (Jang)CUTARENTALING3.000 (Jang)CUTARENTALING3.000 (Jang)CUTARENTALING3.000 (Jang)CUTARENTALING3.0000 (Jang)CUTARENTALING3.00000 (Jang)CUTARENTALING3.000000 (Jang)CUTARENTALING3.00000000 (Jang)CUTARENTALING3.000000000000000000000000000000000000	DATA SHEET	DIR12HT.pdf
TERMINATION STYLEPC PASERIESNOIPACKAGING1.00° (2.54ma), FullPACKAGINGvoe SeSCOPERATING TEMPERATURE0.0°C & SeSCNUMBER OF POSITIONS2MOUNTING TYPENougholdMOUNTING SERSITIVITY LEVEL (MSL)0.00°C voe SeSCMOUSTURE SENSITIVITY LEVEL (MSL)0.00°C voe SeSCLENGTH0.00°C voe SeSCLENGTH0.00°C voe SeSCLENGTH0.00°C voe SeSCLENGTH0.00°C voe SeSCLENGTH0.00°C voe SeSCLENGTH ABOVE BOARD0.10°C voe SeSCLENGTH ABOVE BOARD0.00°C voe SeSCLENGTAL LIFE0.00°C voe SeSCLENGTAL LIFE0.00°C voe SeSCLENGTAL LIFE0.00°C voe SeSCLENGTAL LIFE0.00°C voe SeSCCORACT MATERIAL0.00°C voe SeSCCORACT MATERIAL0.00°C voe SeSCCORACT FINISHGoldCORACT FINISHGAICORACT FINISHSeSCCONTACT FINISHSeSCCONTACT FINISHSeSCCAUTATINGSeSCCAUTATINGSeSCCAUTATINGSeSCCAUTATINGSeSCCAUTATINGSeSCCAUTATINGSeSCCAUTATINGSeSCCAUTATINGSeSCCAUTATINGSeSCCAUTATINGSeSCCAUTATINGSeSCCAUTATINGSeSCCAUTATINGSeSCCAUTATINGSeSCCAUTATINGSeSCCAUTATINGSeSC <td>WASHABLE</td> <td>Yes</td>	WASHABLE	Yes
SRIESNIPTCH0.00 (2.54m), FullPACKAGINGToleOPERATING TEMPERATURE-00C ~ 85CNUMBER OF POSITIONS2MOUTING TYPETole NolocialMOISTURE SENSITIVITY LEVEL(MSL)(Julmick)AGCHARLAL LIFE-00C validLENGTH-00C validHEIGHT ABOVE BOARD12/81 (Auno)ELERTICAL LIFE-00C validELERTICAL LIFE-00C validELERTICAL LIFE-00C validELERTICAL LIFE-00C validELERTICAL LIFE-00C validELERTICAL LIFE-00C validELERTICAL LIFE-00C validCORDER TATING-00C validCORTACT RITING-00C validCORTACT RITING-00C validCORTACT RITING-00C validCORTACT FINISH-00C validCORTACT FINISH-00C validCORTACT FINISH-00C validCORTACT FINISH-00C validCORTACT RITICAL-00C validCORTACT FINISH-00C validCO	VOLTAGE RATING	24VDC
PTCH0.00° (2.54m), FullPACKAGINGTubePACKAGING20°C ~ 85°COPERATING TEMPERATURE20°C ~ 85°CNUMBER OF POSITIONS12MOUNTING TYPEThough HoleMOUNTING TYPE(10/Inited)MOECHANCAL LIFE20°C QcdsLENGTH1.23° (3.142m)LENGTHLed free / ROHS CompliantHEGHT ABOVE BOARD0.13° (4.40m)FEATURESJono CyclesELERTICAL LIFEJono CyclesELERTICAL LIFE0.00 CyclesELERTICAL LIFE0.00 CyclesELERTICAL LIFE0.00 CyclesCINTACT MATERIAL0.00 CyclesCINTACT MATERIALCoper Allon Status Cycles Allon Status Cycles Allon CyclesCONTACT MATERIALCoper Allon CyclesCONTACT FINISHGole Cycles Cycles Allon Cycles Cycles Allon Cycles Cycles Allon Cycles Cycles Allon Cycles Cycl	TERMINATION STYLE	PC Pin
PACKAGINGTueOPERATING TEMPERATURES0°C AS°CNUMBER OF POSITIONS12MOUNTING TYPETrough DialeMOISTURE SENSITIVIT LEVEL (MSL)(Minited)MECHANICAL LIFES0°C AS°CLENGTH1.32° (3.42mm)LEAD FREE STATUS / ROHS STATUSGalf FA / ROHS CompliantHEGHT ABOVE BOARD0.13° (4.40mn)HEGHT ABOVE BOARDJOS OC ASELETRICAL LIFES0°C AS°CLEAD FREE STATUS / ROHS STATUSGalf CA / ROHS COMPLIANTFATURESJOS OC ASSGURANT RATINGS0°C ASSCONTACT MATERIALGope AlloyCONTACT FINISHGoldCONTACT FINISHGoldCONTACT FINISHSPSCONTACT FINISHPolyUpen EPEN FINISHCONTACT ATARIALPONDALONE (PBT) ASS FINISHFAULRE ALLMinite PEN FINISHCONTACT ATARTALSMICH COMPLATER ASS FINISHCONTACT ATARTALMinite PEN FINISHCONTACT ATARTALSINISH COMPLATER ASS FINISHACULATOR TYPEMinite PEN FINISHCONTACT TYPEMinite PEN FINISH	SERIES	NDI
OPERATING TEMPERATURE:20° ~ 8°CNUMBER OF POSITIONS12MOUNTNG TYPEThough HoleMOSTURE SENSITIVITY LEVEL (MSL)(Julimited)MECHANICAL LIFE:200 CyclaLENGTH:207 (142mn)LEAD FREE STATUS / ROHS STATUSCad free / ROHS CompliantFEGHT ABOVE BOARD:1037 (14.0mm)ELGTRICAL LIFE:200 CyclaELGTRICAL LIFE:200 CyclaELGTRICAL LIFE:200 CyclaCIRCENT RATING:200 CyclaELGTRICAL LIFE:200 CyclaCIRCENT RATING:200 CyclaCINTACT MATERIAL:200 CyclaCONTACT FINISH:200 CyclaCONTACT FINISH:200 CyclaCINTACT MATERIAL:200 CyclaCONTACT FINISH:200 Cycla<	PITCH	0.100" (2.54mm), Full
NUMBER OF POSITIONS12MOUNTING TYPEThough HoleMOISTURE SENSITIVITY LEVEL (MSL)(IndimediaMCHANICAL LIFE2,000 CyclesLENGTH1,23" (3.142m)LENGTHCaffer / ROHS CompliantLENGTH ABOVE BOARD(J73" (4.04m)FEATURES700 CyclesELCTRICAL LIFE2,000 CyclesLECTRICAL LIFE2,000 CyclesELCTRICAL LIFE0,000 CyclesCONTACT MATERIAL600 CyclesCONTACT FINISHGape AlloyCONTACT FINISHGape AlloyCONTACT FINISHGope AlloyGODY MATERIALSPSTBODY MATERIALSide (Standar) Cycles FilledATON TYPESide (Standar)	PACKAGING	Tube
MOUNTING TYPEThrough HoleMOUNTING TYPE1(Inlited)MOISTURE SENSITIVT LEVEL (MSL)2,000 CyclesMECHANICAL LIFE2,000 CyclesLENGTH1,237 (3,142mn)LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantFEIGHT ABOVE BOARD1,737 (4,40mn)FEATURES7ape SalELECTRICAL LIFE0,000 CyclesELECTRICAL LIFE0,900 CyclesCURRENT RATING0,900 CyclesCURRENT RATING0,900 CyclesCURRENT RATING0,900 CyclesCONTACT FINISH0,900 CyclesCONTACT FINISH0,900 CyclesCONTACT FINISH0,900 CyclesCURLENT RATING0,900 CyclesCONTACT FINISH0,900 CyclesCONTACT FINISH0,900 CyclesCONTACT FINISH0,900 CyclesCONTACT FINISH0,900 CyclesCONTACT FINISH0,900 CyclesCIRLUT900 CyclesFINISH0,900 CyclesCIRLUT0,900 CyclesCIRLUT0,900 CyclesCIRLUT0,900 CyclesFINISH0,900 CyclesCIRLUT0,900	OPERATING TEMPERATURE	-20°C ~ 85°C
MOISTURE SENSITIVT LEVEL (MSL)I (Unlinited)MCHANICAL LIFE,200 CyclesLENGTH1.237" (1.42mm)LEAD FREE STATUS / ROHS STATUSEad free / ROHS CompliantHEIGHT ABOVE BOARD1.13" (4.0mm)FEATURESTop SealELCTRICAL LIFE.000 CyclesDETAILED DESCRIPTIONDiswitch SPST 12 Position Through Hole Silde (Standard) Actuator 25mA 24VDCCURRENT RATINGCoper AlloyCONTACT FINISHGoldCROUTISPSTFODY MATERIALPolybujen Erepthalate (PBT), Glass FilledROY MATERIALSilde Standard)FORT MATERIALSilde Standard)	NUMBER OF POSITIONS	12
MECHANICAL LIFE2,000 cyclesLENGTH1,237 (3.1.42mm)LEAD FREE STATUS CNADS STATUSLead free / CAUSCIAHEIGH TABOVE BOARD0.1737 (4.40mm)FATURES700 CyclesELCTRICAL LIFE0.000 CyclesDETALED DESCRIPTION0.1930 CyclesCONTACT MATERIAL0.000 CyclesCONTACT FINISH0.000 CyclesCONTACT FINISH0.0000 CyclesCONTACT FINISH0.0000 CyclesCONTACT FINISH0.0000 CyclesCIRCUTSPSCINTACT FINISH0.00000 CyclesCINTACT FINISH0.00000 CyclesCINTACT FINISH0.000000 CyclesCINTACT FINISH0.0000000 CyclesCINTACT FINISH0.00000000000000000000000000000000000	MOUNTING TYPE	Through Hole
Length1.23° (31.42m)LEAD FREE STATUS / ROHS STATUSLed free / ROHS CompliantHEIGHT ABOVE BOARD0.13° (4.40m)FATURES7e8 SalELECTRICAL LIFE0.00 CyclesCURRENT RATING0.90 Kyles T12 Position Through Hole Slide (Standard) Actuator 25mA 24.VDCCURRENT RATINGCoper AllongCONTACT MATERIALCoper AllongCONTACT FINISHGoldCONTACT FINISHPosition Coper BilledCONTACT RATINGSprCONTACT MATERIALSinglement BilledCONTACT FINISHSinglement BilledCONTACT FINISHSinglement BilledCONTACT MATERIALSinglement BilledCONTACT MATERIALSinglement BilledCONTACT MATERIALSinglement BilledCONTACT FINISHSinglement BilledCONTACT MATERIALSinglement BilledCONTACT MATERIALSinglement BilledCONTACT MATERIALSinglement BilledCONTACT FINISHSinglement BilledCONTACT MATERIALSinglement BilledCON	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.173° (4.40mm)FEATURESTape SealELECTRICAL LIFE0.000 CyclesDETAILED DESCRIPTIONDis Wich SPST 12 Position Through Hole Slide (Standard) Actuator 25mA 24VDCCURRENT RATINGCoper AlloyCONTACT MATERIALGoldCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALPolybulen Crepethalate (PBT), Glass FilledROTMATERIALSig (Standard)ACTUATOR YPESig (Standard)	MECHANICAL LIFE	2,000 Cycles
HEIGHT ABOVE BOARDIn78 (4.40mm)FEATURESTap SealELECTRICAL LIFEJ00 CyclesDETALED DESCRIPTIONDip Switch SPST 12 Position Through Hole Slide (Standard) Actuator 25mA 24.VDCCURRENT RATINGSmACONTACT MATERIALCoper AlloyCONTACT FINISHGodCIRCUITSPSTBODY MATERIALPolyubjene Engles Slide (Standard)ROTMATERIALSide (Standard)BODY MATERIALSide (Standard)ACTUATOR TYPESide (Standard)	LENGTH	1.237" (31.42mm)
FATURESTape SealELECTRICAL LIFE2,000 CyclesDETALLED DESCRIPTIONDip Switch SPDT 12 Position Through Hole Slide (Standard) Actuator 25mA 24VDCCURRENT RATING25mACONTACT MATERIALCoper AlloyCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALPolybulen Erepethalate (PBT), Glass FilledACTUATOR TYPEBic (Standard)	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ELECTRICAL LIFE2,000 CyclesDETAILED DESCRIPTIONDis Witch SPST 12 Position Through Hole Side (Standard) Actuator 25mA 24VDCCURRENT RATING25mACONTACT MATERIALCoper AlloyCONTACT FINISHGoldFICRUITSPSTBODY MATERIALOlybutylen Engens FilledACTUATOR TYPEBie (Standard)	HEIGHT ABOVE BOARD	0.173" (4.40mm)
DETAILED DESCRIPTIONDip Switch SPST 12 Position Through Hole Slide (Standard) Actuator 25mA 24VDCCURRENT RATING25mACONTACT MATERIALCoper AlloyCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALPolybutgen Erepthalae (PBT), Glass FilledACTUATOR TYPESile (Standard)	FEATURES	Tape Seal
CURRENT RATING25mACONTACT MATERIALCoper AlloyCONTACT FINISHGoldCIRCUITSPSBODY MATERIALPolybulene (PBT), Glass FilledACTUATOR TYPESile (Standard)	ELECTRICAL LIFE	2,000 Cycles
CONTACT MATERIALCoper AlloyCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALPolybutglene Terephthalate (PBT), Glass FilledACTUATOR TYPESile (Standard)	DETAILED DESCRIPTION	Dip Switch SPST 12 Position Through Hole Slide (Standard) Actuator 25mA 24VDC
CONTACT FINISHGoldCIRCUITSPSTBODY MATERIALPolybutylene Terephthalate (PBT), Glass FilledACTUATOR TYPESide (Standard)	CURRENT RATING	25mA
CIRCUITSPSTBODY MATERIALPolybutylene Terephthalate (PBT), Glass FilledACTUATOR TYPESide (Standard)	CONTACT MATERIAL	Copper Alloy
BODY MATERIAL Polybutylene Terephthalate (PBT), Glass Filled   ACTUATOR TYPE Slide (Standard)	CONTACT FINISH	Gold
ACTUATOR TYPE Slide (Standard)	CIRCUIT	SPST
	BODY MATERIAL	Polybutylene Terephthalate (PBT), Glass Filled
ACTUATOR LEVEL Flush, Recessed	ACTUATOR TYPE	Slide (Standard)
	ACTUATOR LEVEL	Flush, Recessed


## **Related Tags**

APEM Inc. NDIR12HT	NDIR12HT Distributor	NDIR12HT Supplier
NDIR12HT Price	NDIR12HT Pictures	NDIR12HT Image
NDIR12HT PDF Datasheet	NDIR12HT Download Datasheet	NDIR12HT Datasheet
NDIR12HT Stock	Buy NDIR12HT	Buy APEM Inc. NDIR12HT
APEM Inc. NDIR12HT	APEM Inc. Supplier	APEM Inc. Distributor
APEM Inc. NDIR12HT	APEM Components, LLC NDIR12HT	APEM Components, LLC NDIR12HT

## **Related Products**

			NDIR10S
	Manufacturers: APEM Inc.		Manufacturers: APEM Inc.
APEM	Description: SWITCH SLIDE DIP SPST 25MA 24V In stock: Out stock	APEM	Description: SWITCH SLIDE DIP SPST 25MA 24V In stock: Out stock
	RFQ		RFQ
	NDIR09S		NDIR10ST
	Manufacturers: APEM Inc.		Manufacturers: APEM Inc.
O APEM	Description: SWITCH SLIDE DIP SPST 25MA 24V	APEM	Description: SWITCH SLIDE DIP SPST 25MA 24V
	In stock: Out stock		In stock: Out stock
	RFQ		RFQ
	NDIR12S		NDIR12H
	Manufacturers: APEM Inc.		Manufacturers: APEM Inc.
O APEM	Description: SWITCH SLIDE DIP SPST 25MA 24V In stock: Out stock		Description: SWITCH SLIDE DIP SPST 25MA 24V In stock: Out stock
	RFQ		RFQ

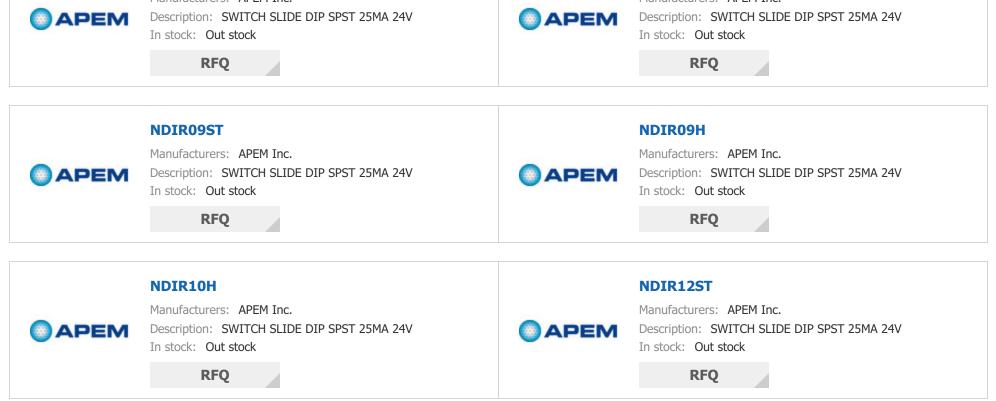

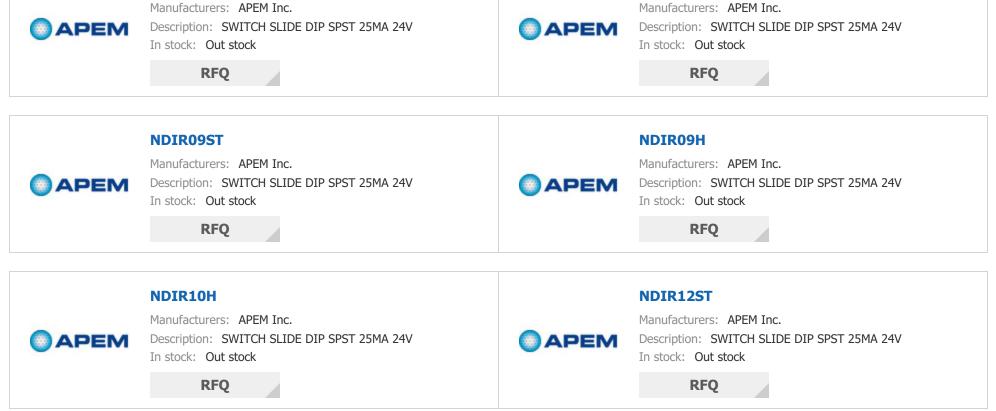

#### Copyright @ 2020 Reliable Distributor of Electronic Components - Ocean-Components.com

E-mail: Info@Ocean-Components.com

Address: Room 2102, Connaught Commercial Building, 185 Wan Chai Rd, Wan Chai, Hong Kong

