D3V-62M-1A4-K Details PDF





D3V-62M-1A4-K

Part Number:	D3V-62M-1A4-K
Manufacturer/Brand:	Omron
Product description	SWITCH SNAP ACTION SPDT 6A 250V
Datasheets:	D3V-62M-1A4-K.pdf
RoHs Status	Lead free / RoHS Compliant
Ship From	Hong Kong
Shipment Way	DHL/Fedex/TNT/UPS/EMS

Image may be representation. See specifications for product details.

REQUEST FOR QUOTATION


AANUFACTUREROmronDESCRIPTIONSWITCH SNAP ACTION SPDT 6A 250VDESCRIPTIONLead free / ROHS CompliantEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantDATA SHEETD'S-62M-1A4-K.pdfVOLTAGE RATING - DCSOVVOLTAGE RATING - ACSolder, Quick Connect - 0.187" (4.7mm)VOLTAGE RATING - ACD'S-02M-1A4-K.pdfVOLTAGE RATING - ACSolder, Quick Connect - 0.187" (4.7mm)VOLTAGE RATING - ACD'S-02M-1A4-K.pdfVOLTAGE RATING - ACSolder, Quick Connect - 0.187" (4.7mm)SWITCH FUNCTIOND'S-02M-1A4-K.pdfVELEASE FORCE1.18gfVELEASE FORCESolder, Quick Connect - 0.187" (4.0mm)VELEASE FORCED'S-02M-1A4-K.BYOMIVERTRAVEL0.602" (1.6mm)VERTRAVEL0.602" (1.6mm)VERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELCACONSCVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELGOLO" (1.5mm)VERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVEL <t< th=""><th></th><th>Specifications of D3V-62M-1A4-K</th></t<>		Specifications of D3V-62M-1A4-K
AANUFACTUREROmronDESCRIPTIONSWITCH SNAP ACTION SPDT 6A 250VDESCRIPTIONLead free / ROHS CompliantEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantDATA SHEETD'S-62M-1A4-K.pdfVOLTAGE RATING - DCSOVVOLTAGE RATING - ACSolder, Quick Connect - 0.187" (4.7mm)VOLTAGE RATING - ACD'S-02M-1A4-K.pdfVOLTAGE RATING - ACSolder, Quick Connect - 0.187" (4.7mm)VOLTAGE RATING - ACD'S-02M-1A4-K.pdfVOLTAGE RATING - ACSolder, Quick Connect - 0.187" (4.7mm)SWITCH FUNCTIOND'S-02M-1A4-K.pdfVELEASE FORCE1.18gfVELEASE FORCESolder, Quick Connect - 0.187" (4.0mm)VELEASE FORCED'S-02M-1A4-K.BYOMIVERTRAVEL0.602" (1.6mm)VERTRAVEL0.602" (1.6mm)VERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELCACONSCVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELGOLO" (1.5mm)VERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVELSOLDERVERTRAVEL <t< td=""><td></td><td></td></t<>		
SescriptionSWITCH SNAP ACTION SPDT 6A 250VEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantDATA SHEETGD 3V-62M-1A4-K.pdfVOLTAGE RATING - DC30V//OLTAGE RATING - ACSolder, Quick Connect - 0.187" (4.7mm)//OLTAGE RATING - AC0.1400REIEN0.1400SWITCH FUNCTION0.1400SWITCH FUNCTION0.189" (4.0mm)SWITCH FUNCTION0.189" (4.0mm)SWITCH FUNCTION0.162" (1.6mm)SWITCH FUNCTION0.062" (1.6mm)SWITCH FUNCTION0.062" (1.6mm)SWITCH FUNCTION0.060" (1.5.2mm)SWITCH FUNCTION0.000" (1.5.2mm)SWITCH FUNCTION0.000" (1.5.2mm)SWITCH FUNCTION0.000" (1.5.2mm)SWITCH FUNCTION0.000" (1.5.2mm)SWITCH FUNCTION1.000,000 CyclesSWITCH FUNCTION1.000,000 CyclesSWITCH FUNCTION1.000,000 CyclesSWITCH FUNCTION1.0000 CyclesSWITCH FUNCTION1.00000 CyclesSWITCH FUNCTION1.00000 CyclesSWITCH FUNCTION1.00000 CyclesSWITCH FUNCTION1.00000 CyclesSWITCH FUNCTION1.00000 CyclesSWITCH FUNCTION1.00000	PART NUMBER	D3V-62M-1A4-K
EAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantDATA SHEETGD3V-62M-1A4-K.pdf//OLTAGE RATING - DC30V//OLTAGE RATING - ACSolder, Quick Connect - 0.187" (4.7mm)//OLTAGE RATING - ACOn-MomSWITCH FUNCTIONOn-MomSWITCH FUNCTIOND3VSKELESOltageRELEASE FORCE6.1189fARCKAGINGDulkSVERTRAVEL0.602" (1.6mm)ODTHER NAMESD3V62M1A4KSVERTRAVEL0.602" (1.6mm)OPERATING FORCE6.010" (15.2mm)OPERATING FORCE0.600" (15.2mm)OPERATING FORCE0.600" (15.2mm)OPERATING FORCE1.1000,000 CyclesOUTINIE TYPEI.0000,000 CyclesOUTINIE SENSITIVITY LEVEL (MSL)I.1000,000 CyclesORESS PROTECTIONIP40CALD FREE STATUS / ROHS STATUSICACITICACELCTRICAL LIFESOL000 CyclesCELCTRICAL LIFESOL000 Cycle	MANUFACTURER	Omron
DATA SHEETD3V-52M-1A4-K.pdfVOLTAGE RATING - DC3VVOLTAGE RATING - AC250VCERMINATION STYLESolder, Quick Connect - 0.187" (4.7mm)SWITCH FUNCTION0n-MomSWITCH FUNCTION0n-MomSWITCH FUNCTION019VRELEASE FORCE0.189fARELASE FORCE0.181PACKAGING0.062" (1.6mm)PACKAGING0.062" (1.6mm)DYPERATING FUNCTION0.062" (1.6mm)DYPERATING FUNCTION0.062" (1.6mm)DYPERATING FORCE0.060" (1.5mm)OPERATING FORCE0.000" (1.5mm)OPERATING FORCE0.000" (1.5mm)OUTITING TYPE0.000.000 CyclesOUTITING TYPE0.000.000 CyclesOUTITING TYPE0.000" (1.5mm)ORESS PROTECTION1.000.000 CyclesOUTITING TYPE0.000" (1.5mm)CEAD FREE STATUS / ROHS STATUS0.000" (1.5mm)CEAD FREE STATUS / ROHS STATUS0.00	DESCRIPTION	SWITCH SNAP ACTION SPDT 6A 250V
VOLTAGE RATING - DC30VVOLTAGE RATING - AC50VCERMINATION STYLESolder, Quick Connect - 0.187" (4.7mm)SWITCH FUNCTIONOn-MomSWITCH FUNCTIOND3VSWITCH FUNCTION1018fSWITCH FUNCTION0.118gfSWITCH FUNCTION0.157" (4.0mm)SWITCH FUNCTION0.052" (1.6mm)SWITCH FUNCTION0.062" (1.6mm)SWELEASE FORCE0.062" (1.6mm)SWELEASE FORCE0.062" (1.6mm)SWELEASE FORCE0.060" (1.5.2mm)SWERTRAVEL0.600" (1.5.2mm)SWERTRAVEL0.600" (1.5.2mm)SWERATING FORCE0.600" (1.5.2mm)SWERATING FORCE0.600" (1.5.2mm)SWERATING FORCE0.600" (1.5.2mm)SWERATING FORCE1.01000 (Suese)SWERATING FORCE1.000,000 (Suese)SWERATING FORCETON1.000,000 (Suese)SWERATING FORCETON1.000,000 (Suese)SWERATING FORCETON1.000,000 (Suese)SWERATING FORCETON1.000,000 (Suese)SWERATING FULL1.000,000 (Suese)SWERATING FULL1.000,000 (Suese)SWERATING FULL1.000,000 (Suese)SWERATING FULL1.0000 (Suese)SWERATING FULL1.0000 (Suese)SWERATING FULL1.0000 (Suese)SWERATING FULL1.00000 (Suese)SWERATING FULL1.00000 (Suese)SWERATING FULL1.00000 (Suese)SWERATING FULL1.00000 (Suese)SWERATING FULL1.000000 (Suese)SWERATING FULL1.000000 (Suese)SWERA	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ACITAGE RATING - AC250VFERMINATION STYLESolder, Quick Connect - 0.187" (4.7mm)SWITCH FUNCTIONOn-MomSWITCH FUNCTIOND3VSWITCH FUNCTIONSolder, Quick Connect - 0.187" (4.7mm)SWITCH FUNCTIONSolder, Police - 0.187" (4.7mm)SWITCH FUNCTIONSolder, Quick Connect - 0.187" (4.7mm)SWITCH FUNCTIONSolder, Quick Connect - 0.187" (4.7mm)SWITCH FUNCTIONSolder, Connect - 0.187" (4.7mm)SWITCH F	DATA SHEET	D3V-62M-1A4-K.pdf
TERMINATION STYLESolder, Quick Connect - 0.187" (4.7mm)SWITCH FUNCTIONOn-MomSWITCH FUNCTIOND3VSRETESD3VRELEASE FORCE6.118gfRETRAVEL0.157" (4.0mm)ACKAGINGBulkDYERTRAVEL0.062" (1.6mm)DYERTRAVEL0.062" (1.6mm)DYERTRAVEL0.062" (1.6mm)DYERTRAVEL0.060" (1.5.2mm)DYERTATING FORCE60gfOPERATING FORCE0.000" (1.5.2mm)OPERATING FORCE0.000.000 CyclesACHANICAL LIFE1.000.000 CyclesINGRESS PROTECTION1.44NGRESS PROTECTION1.40ILECTRICAL LIFE50.000 CyclesILECTRICAL CYCLE50.000 CyclesILECT	VOLTAGE RATING - DC	30V
SWITCH FUNCTIONOn-MomSWITCH FUNCTIONOn-MomSERIESD3VRELEASE FORCE6.118gfPRETRAVEL0.157" (4.0mm)PACKAGINGBulkDVERTRAVEL0.062" (1.6mm)DVERTRAVEL0.062" (1.6mm)DYERTRAVEL0.062" (1.6mm)DYERTRAVEL0.062" (1.6mm)DYERTRAVEL0.062" (1.6mm)DYERTRAVEL0.060" (15.2mm)DYERATING TEMPERATURE-25°C ~ 105°COPERATING POSITION0.600" (15.2mm)OPERATING FORCE60fAUUNTING TYPE1.0100,000 CyclesLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantNGRESS PROTECTION1440NGRESS PROTECTION1000,000 CyclesEATURES0.0000 CyclesEATURES	VOLTAGE RATING - AC	250V
SERIESD3VRELEASE FORCE6.118gfRETRAVEL0.557" (4.0mm)PACKAGINGBulkDVERTRAVEL0.662" (1.6mm)DVERTRAVEL0.662" (1.6mm)DVERTRAVEL0.662" (1.6mm)DVERTRAVEL0.602" (1.6mm)DVERTRAVEL0.600" (1.52mm)DVERTATING FORCE0.600" (1.52mm)DVERTING FORCE0.601" (1.0mm)DVERTING FORCE0.601DVERTING FORCE0.601DVERTING FORCE0.6000 (1.0mm)DVERTING FORCE1.0000,000 (2.0mm)DVERTING FORCE1.0000,000 (2.0mm)DVERTING1.0000,000 (2.0mm)DVERTING1.0000,000 (2.0mm)DVERTING1.0000,000 (2.0mm)DVERTING1.0000,000 (2.0mm)DVERTING1.0000,0000 (2.0mm)	TERMINATION STYLE	Solder, Quick Connect - 0.187" (4.7mm)
Relation6.118gfRetravel6.167(4.0mm)Retravel6.167(4.0mm)Ackaging8ukDetravel0.62°(1.6mm)Detravel0.62°(1.6mm)Detravel30%2911A4kByOMIDetravel25°C ~ 105°CDetraving Position0.60°(15.2mm)OPERATING FORCE60fOUNTING TYPE0.6000 (S.2mm)OUNTING TYPE0.6000 (S.2mm)OUNTING TYPE0.6000 (S.2mm)OUNTING TYPE1.000,000 (S.2mm)OUNTING TYPE0.6000 (S.2mm)OUSE SPROTECTION1.000,000 (S.2mm)ORESS PROTECTION1.000,000 (S.2mm)OURENTATINES1.000,000 (S.2mm)OUTINES SPROTECTION1.000,000 (S.2mm)OUTINES SPROTECTION1.000,000 (S.2mm)OUTINES0.000 (S.2mm)OUTIN	SWITCH FUNCTION	On-Mom
PRETRAVEL0.157" (4.0mm)PACKAGINGBulkPACKAGING0.062" (1.6mm)DVERTRAVEL0.062" (1.6mm)DTHER NAMESD3V62M1A4KBYOMI 24960DTHER NAMES-25°C ~ 105°CDPERATING TEMPERATURE-25°C ~ 105°COPERATING POSITION0.600" (15.2mm)OPERATING FORCE60gfAQUNTING TYPEChassis MountAQUNTING TYPE1.000,000 CyclesAGE STATUS / ROHS STATUSLead free / ROHS CompliantNGRESS PROTECTION1940AGE STATUS / ROHS STATUS500,000 CyclesELECTRICAL LIFE500,000 CyclesELECTRICAL LIFE600,000 CyclesELECTRICAL LIFE600,000 CyclesCURRENT RATING6.060" (1.5mm)CURRENT RATING6.060" (1.5mm) <td>SERIES</td> <td>D3V</td>	SERIES	D3V
AACKAGING Buk DVERTRAVEL 0.602" (1.6mm) DVERTRAVEL 0.602" (1.6mm) DVERATING TEMPERATURE 2.502 AUS90 DVERATING POSITION 2.502 AUS90 DVERATING POSITION 0.600" (15.2mm) DVERATING POSITION 0.600" (15.2mm) DVERATING FORCE 0.601" (101mited) DVERATING FORCE 0.601" (101mited) DVERATING FORCE 1.00100 Cycles AUS101 AUS90 DVERATING X DATES STATUS 1.00100 Cycles DVERATING SPROTECTION 1.00100 Cycles DVERATINGS PROTECTION 1.00100 Cycles DVERATINGS PROTECTION 1.00100 Cycles DVERATINGS PROTECTION 1.00100 Cycles DVERATINGS PROTECTION 1.00100 Cycles DVERATINGS DVERATING 1.00100 Cycles DVERATINGS DVERATING 1.00100 Cycles DVERATINGS DVERATING 1.00100 Cycles DVERATINGS DVERATING 1.00100 Cycles DVERATING DVERATING 1.00100 Cycles DVERATING DVERATING 1.00100 Cycles DVERATING DVERATING 1.00100 Cycles DVERATING 1.00100 Cycles DVERATING DVERATING 1.00100 Cycles DVERATING 1.00100 Cycles DVERATUNG 1.00100 Cycles	RELEASE FORCE	6.118gf
DVERTRAVEL0.062" (1.6mm)DVERTRAVEL33%52M1A4K 33%52M1A4KBYOMIDVERATING TEMPERATURE-25°C ~ 105°CDVERATING POSITION600" (15.2mm)DVERATING FORCE60940UNTING TYPEChasis Mount40UNTING TYPE1 (Unlimited)40UNTING TYPE10,000,000 Cycles40ECHANICAL LIFE10,000,000 Cycles40ECTRICAL LIFE14040ECTRICAL LIFE00,000 Cycles40ECTRICAL CYCLES00,000 Cycles40ECTRICAL CYCLES00,000 Cycles40ECTRICAL CYCLES00,000 Cycles40ECTRICAL CYCLES00,000 Cycles40ECTRICAL CYCLES00,000 Cycles <td>PRETRAVEL</td> <td>0.157" (4.0mm)</td>	PRETRAVEL	0.157" (4.0mm)
DTHER NAMES DYEATURE DEPERATING TEMPERATURE 25°C ~ 105°C ~ 105	PACKAGING	Bulk
DTHER NAMESD3V62M1A4KBYOMI 24960DPERATING TEMPERATURE-25°C ~ 105°CDPERATING POSITION0.600" (15.2mm)DPERATING FORCE090ADUNTING TYPEChasis MountADUNTING TYPE1 (Unlimited)ADUNTING TYPE1000,000 CyclesADURE STATUS / ROHS STATUSLead Free / ROHS CompliantADRESS PROTECTION1400ADRESS PROTECTION1000,000 CyclesADRESS PROTECTION1000,000 Cycl	OVERTRAVEL	0.062" (1.6mm)
DPERATING POSITION0.600" (15.2mm)DPERATING PORCE60fADUNTING TYPEChasis MountADUNTING TYPE1 (Unlimited)ADISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)AECHANICAL LIFE10,000,002 (class)ADI FREE STATUS / ROHS STATUSLead free / ROHS CompliantNGRESS PROTECTION1940AECTRICAL LIFE50,000 CyclesELECTRICAL LIFE0.600" (1.5mm)DIFFERENTIAL TRAVEL61,000 CyclesCURRENT RATING50,000 CyclesCURRENT RATING50,000 CyclesCURRENT RATING61,000 CyclesCURRENT RATING50,000 CyclesCURRENT RATING50,000 CyclesCURRENT RATING50,000 CyclesCURRENT RATING61,000 CyclesCURRENT RATING50,000 CyclesCURRENT RATING50,000 CyclesCURRENT RATING50,000 CyclesCURRENT RATING61,000 CyclesCURRENT RATING50,000 Cycles <td>OTHER NAMES</td> <td>D3V62M1A4KBYOMI</td>	OTHER NAMES	D3V62M1A4KBYOMI
PPERATING FORCE60gfAOUNTING TYPEChassis MountAOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)ACCHANICAL LIFE10,000,000 CyclesLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantNGRESS PROTECTIONIP40ELECTRICAL LIFE500,000 CyclesELECTRICAL LIFE0.060" (1.5mm)CURRENT RATING6A (AC/DC)CURRENT RATINGSPDT	OPERATING TEMPERATURE	-25°C ~ 105°C
MOUNTING TYPE Chassis Mount AOUNTING TYPE (MSL) 1(Unlimited) ACCHANICAL LIFE 10,000,000 Cycles ACCHANICAL LIFE 10,000,000 Cycles ACCHANICAL LIFE 10,000,000 Cycles ACCHANICAL LIFE 10,000,000 Cycles ACCHANICAL LIFE 10,000 CYCLES ACCHANICAL LIF	OPERATING POSITION	0.600" (15.2mm)
ACTION1 (Unlimited)MECHANICAL LIFE10,000,000 CyclesLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantNGRESS PROTECTIONIP40EATURES-ELECTRICAL LIFE500,000 CyclesDIFFERENTIAL TRAVEL0.060" (1.5mm)CURRENT RATING6A (AC/DC)ELECTRICAL LIFESPDT	OPERATING FORCE	60gf
ACHANICAL LIFE10,000,000 CyclesEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantNGRESS PROTECTIONIP40EATURES-EATURES500,000 CyclesELECTRICAL LIFE0.060" (1.5mm)CURRENT RATING6A (AC/DC)ELECTRICAL LIFESPDT	MOUNTING TYPE	Chassis Mount
Lead FREE STATUS / ROHS STATUSLead free / RoHS CompliantNGRESS PROTECTIONIP40EATURES-EATURES500,000 CyclesDIFFERENTIAL TRAVEL0.060" (1.5mm)CURRENT RATING6A (AC/DC)EATURESSPDT	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
NGRESS PROTECTIONIP40FEATURES-ELECTRICAL LIFE500,000 CyclesDIFFERENTIAL TRAVEL0.060" (1.5mm)CURRENT RATING6A (AC/DC)ELECTRICAL LIFESPDT	MECHANICAL LIFE	10,000,000 Cycles
FEATURES-ELECTRICAL LIFE500,000 CyclesDIFFERENTIAL TRAVEL0.060" (1.5mm)CURRENT RATING6A (AC/DC)CIRCUITSPDT	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ELECTRICAL LIFE 500,000 Cycles DIFFERENTIAL TRAVEL 0.060" (1.5mm) CURRENT RATING 6A (AC/DC) CIRCUIT SPDT	INGRESS PROTECTION	IP40
DIFFERENTIAL TRAVEL 0.060" (1.5mm) CURRENT RATING 6A (AC/DC) CIRCUIT SPDT	FEATURES	-
CURRENT RATING 6A (AC/DC) CIRCUIT SPDT	ELECTRICAL LIFE	500,000 Cycles
CIRCUIT SPDT	DIFFERENTIAL TRAVEL	0.060" (1.5mm)
	CURRENT RATING	6A (AC/DC)
ACTUATOR TYPE Lever, Straight	CIRCUIT	SPDT
	ACTUATOR TYPE	Lever, Straight

Related Tags

Omron D3V-62M-1A4-K	D3V-62M-1A4-K Distributor	D3V-62M-1A4-K Supplier
D3V-62M-1A4-K Price	D3V-62M-1A4-K Pictures	D3V-62M-1A4-K Image
D3V-62M-1A4-K PDF Datasheet	D3V-62M-1A4-K Download Datasheet	D3V-62M-1A4-K Datasheet
D3V-62M-1A4-K Stock	Buy D3V-62M-1A4-K	Buy Omron D3V-62M-1A4-K
Omron D3V-62M-1A4-K	Omron Supplier	Omron Distributor
Omron D3V-62M-1A4-K	Omron Electronics Inc-IA Div D3V-62M-1A4-K	Omron Electronics Inc-EMC Div D3V-62M-1A4-K
Omenon Electronics LLC D2V/C2M 1A4 V		

Omron Electronics LLC D3V-62M-1A4-K

Related Products

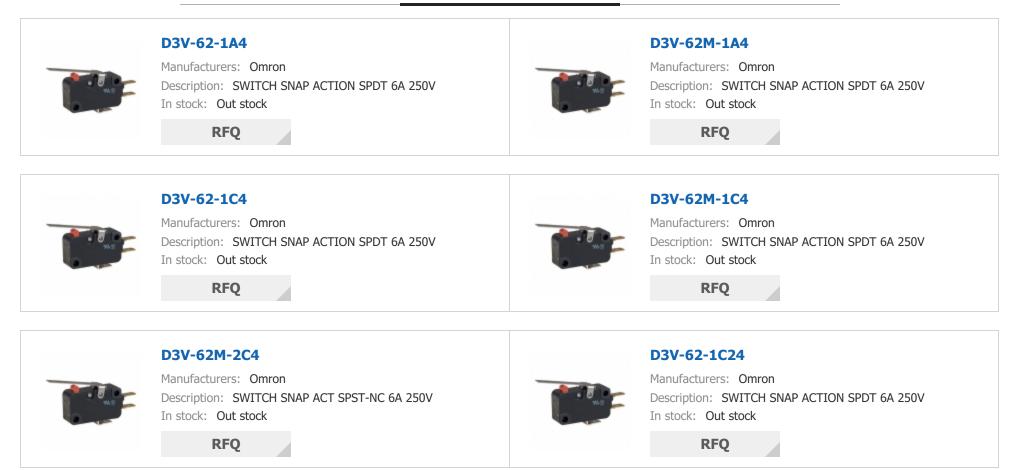



D3V-62M-1C24-K



Description: SWITCH SNAP ACTION SPDT 6A 250V

RFQ

D3V-62M-1C24

In stock: 317 pcs

Manufacturers: Omron

RFQ

D3V-62-2C24



Manufacturers: Omron Description: SWITCH SNAP ACT SPST-NC 6A 250V In stock: Out stock

RFQ

D3V-61M-3C4



Manufacturers: Omron Description: SWITCH SNAP ACT SPST-NO 6A 250V In stock: Out stock

RFQ



Copyright @ 2020 Reliable Distributor of Electronic Components - Ocean-Components.com

E-mail: Info@Ocean-Components.com

Address: Room 2102, Connaught Commercial Building, 185 Wan Chai Rd, Wan Chai, Hong Kong

