U23J21ZQE22 Details PDF



C&K				

U23J21ZQE22

Part Number:		
Manufacturer/Brand:		
Product description		
Datasheets:		
RoHs Status		
Ship From		
Shipment Way		

U23J21ZQE22

C&K SWITCH ROCKER DPDT 5A 120V U23J21ZQE22.pdf Lead free / RoHS Compliant Hong Kong DHL/Fedex/TNT/UPS/EMS

REQUEST FOR QUOTATION


Image may be representation. See specifications for product details.

PRAT NUMBER L23212QE22 MANUFACTURER C&K DESCRIPTION SWITCH ROCKER DOMPISA 120V LEAD FREE STATUS / ROHS STATUS Lead free / RoHS Compilant DATA SHEET SWITCH ROCKER DOMPISA 120V VOLTAGE RATING - AC SWITCH ROLKER DOMPISATUS VOLTAGE RATING - AC 120V TERMINATION STYLE Solder Lug SWITCH FUNCTION On-Off-On SERIES 7000 PARAL CUTOUT DIMENSIONS Rectangular - 19.0Smm x 10.41mm PACKGING Bulk OPERATING TEMPERATURE - 30%C + 85°C MOUNTING TYPE - 400K-MAS Aspa-In MOUNTING TYPE - 10(Linnikod) MOUNTING TYPE - 10(Linnikod) MAUUFACTURER STATUS / ROHS STATUS Lead free / RoHS Compliant ILLUMINATION YOLTAGE (NOMINAL) - 10(Linnikod) MAUUFACTURER STATUS / ROHS STATUS Lead free / RoHS Compliant ILLUMINATION YOLTAGE (NOMINAL) - 10(Linnikod) ILLUMINATION YOLTAGE (NOMINAL) - 10(Linnikod) ILLUMINATION YOLTAGE (NOMINAL) - 10(Linnikod) ILLUMINATION YOLTAGE (NOMINAL)		Specifications of U23J21ZQE22
MANUFACTURERCKDESCRIPTIONSWTCH ROCKER DPDT 5A 120VLEAD FREE STATUS / ROHS STATUSLead free / RAHS CompliantDATA SHEETBU U33212QE22.pdfVOLTAGE RATING - DC28VVOLTAGE RATING - AC120VTERMINATION STVLESolder LugSWITCH FUNCTIONOn-Off-OnSERIES7000PANEL CUTOUT DIRENSIONSRectangular - 19.55mm x 10.41mmPACKAGINGJankOUNTING TYPEPanel Mount, Snap-InMOUNTING TYPEAnd free / ROHS CompliantINSTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)ILLUMINATION VOLTAGE (MOMINAL)-LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILLUMINATION VOLTAGE (MOMINAL)-LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILLUMINATION VOLTAGE (MOMINAL)-LEAT TREESEpony Sealed TerminalsELECTRICAL LIFE0,000 CyclesDETAILED DESCRIPTIONRocker Switch DPDT SA (AC/DC) 120V Panel Mount, Snap-InCURRENT RATING0,000 CyclesELECTRICAL LIFE0,000 CyclesDETAILED DESCRIPTIONRocker Switch DPDT SA (AC/DC) 120V Panel Mount, Snap-InCURRENT RATINGSA (AC/DC)CURRENT RATINGSA (AC/DC)CURRENT RATINGSA (AC/DC)CURRENT RATINGSA (AC/DC)CURRENT RATINGBeakCURATOR TYPEBeakCURATOR TYPEPADECURATOR TYPEPADECURATOR TYPESA (AC/DC)CURATOR TYPEBeak <t< td=""><td></td><td></td></t<>		
PESCRIPTIONSWITCH ROCKER PDDT 5A 120VLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantDATA SHEETDi U23212QE22.pdfVOLTAGE RATING - DC28VVOLTAGE RATING - AC120VTERMINATION STALESolder LugSWITCH FUNCTIONOn-Off-OnSERIES7000PARLEQUITON DIMENSIONSRectangular - 19.5mm x 10.41mmPACKAGINGBulkOURTAING FUPERATURE>09C ~ 85°CMOUNTING TYPEPanel Mount, Snap-InMOUNTING TYPEPanel Mount, Snap-InMOUNTING TYPE1 (Unlimited)MOUNTING TYPE1 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILLUMINATION VOLTAGE (MOMINAL)-LLUMINATION VOLTAGE (MOMINAL)0,000 CyclesELECTRICAL LIFE0,000 CyclesELECTRICAL LIFE0,000 CyclesELECTRICAL LIFE10,000 CyclesELECTRICAL LIFE0,000 CyclesELECTRICAL LIFE10,000 CyclesELECTRICAL LIFE10,000 CyclesELECTRICAL LIFE0,000 CyclesELECTRICAL LIFE0,000 CyclesCURRENT RATINGSA (AC/DC)CURRENT RATINGSA (AC/DC)CURRENT RATINGSA (AC/DC)CURRENT RATINGSA (AC/DC)CURRENT RATINGPDTACTUATOR TYPEPadel	PART NUMBER	U23J21ZQE22
LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantDATA SHEETEv32122QE22.pdfVOLTAGE RATING - DC28VVOLTAGE RATING - AC120VTERMINATION STYLESolder LugSWITCH FUNCTIONOn-Off-OnSREES7000PAREL CUTOUT DIMENSIONSRectangular - 19.05mm x 10.41mmPACKAGINGBulkOPERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPEPanel Mount, Snap-InMOUNTING TYPE1 (Unlimited)MOUNTING TYPE1 (Unlimited)MAULFCUTURE STATUS ADD LEAD TIME1 WeeksLEAD FREE STATUS / ROMINAL)-LULUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-RATURE SPROTECTION-LEAD FREE STATUS / ROMINAL)-LULUMINATION VOLTAGE (NOMINAL)-ELECTRICAL LIFE40,000 CyclesELECTRICAL LIFE40,000 CyclesLECTRICAL LIFESOK Sealed TerminalsELECTRICAL LIFESOK Sealed TerminalsELECTRICAL LIFESOK CYCLESCURRENT RATINGSA (AC/DC)CURRENT RATINGSA (AC/DC)CURRENT RATINGBiackCURRENT RATINGEDPTCURATUREPROTECURATURE TYPEPade	MANUFACTURER	C&K
Data SHEETDis 232220E22,pdfVOLTAGE RATING - DC28VVOLTAGE RATING - AC120VTEMINATION STVLESolder LugSWITCH FUNCTIONOn-Off-OnSREES700PAREL CUTOUT DIMENSIONSRetangular - 19.05mm x 10.41mmPACKAGINGBulkOPERATING T-MPE30°C ~ 85°CMOUNTING TYPE9 and Mout, Snap-InMOUSTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MINUFACTURER STANDARD LEAD TIME1 WeelsLEAD FREE STATUS / ROHS STATUSLead free / RAHS CompliantILULIMINATION VOLTAGE (NOMINAL)-LILULIMINATION TYPE, COLOR-EATURESExpose ColorLEAT RESFoxy Scaled TerminalsLECTRICAL LIFE4,000 CyclesILULMINATION TYPE, COLORScker Switch DPDT SA (AC/DC) 120V Panel Mount, Snap-InCURRENT RATINGSA (AC/DC)CURRENT RATINGSA (AC/DC)CURRENT RATINGSA (AC/DC)CURRENT RATINGSDE Switch DPDT SA (AC/DC) 120V Panel Mount, Snap-InCURRENT RATINGSA (AC/DC)CURRENT RATINGSDE Switch DPDT SA (AC/DC) 120V Panel Mount, Snap-InCURRENT RATINGSA (AC/DC)CURRENT RATINGSDE Switch DPDT SA (AC/DC) 120V Panel Mount, Snap-InCURRENT RATINGSDE Switch DPDT SA (AC/DC) 120V Panel Mount, Snap-InCURRENT RATINGDPDTCURATATINGDPDTCURATATINGPADECHATATION COLTAGE (MARINEL)PADECURATATINGPADECURATATINGPADECURATATING	DESCRIPTION	SWITCH ROCKER DPDT 5A 120V
VOLTAGE RATING - DCZaVVOLTAGE RATING - ACI20VTERMINATION STYLESolder LugSWITCH FUNCTIONOn-Off-OnSREIES700PANEL CUTOUT DIMENSIONSRectangular - 19.05mm x 10.41mmPACKAGINGBulkOPERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPEPanel Mount, Snap-InMOUNTING TYPE-10MOUNTING TYPE1 (Unlimited)MARUFACTURER STANDARD LEAD TIMEI WeeksLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantLILUMINATION VOLTAGE (NOMINAL)-LILUMINATION TYPE, COLOR-LECTRICAL LIFEHoogo Scaled TerminalsELECTRICAL LIFESolder Switch DPDT SA (AC/DC) 120V Panel Mount, Snap-InCURRENT RATINGSA (AC/DC)CURRENT RATINGSA (AC/DC)CURRENT RATINGSA (AC/DC)CURRENT RATINGSA (AC/DC)CURRENT RATINGSA (AC/DC)CURRENT RATINGPotTCURATURATION TYPEPade	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
VoltAGE RATING - ACI20VTERMINATION STYLESolder LugSWITCH FUNCTIONOn-Off-OnSERIES7000PANEL CUTOUT DIMENSIONSRectangular - 19.05mm x 10.41mmPACKAGINGBulkOPERATING TEMPERATURE-30°C AS°CMOUTING TYPEPanel Mount, Snap-InMOISTURE SENSITIVITY LEVEL (MSL)1 (Unimited)MAUFACTURER STANDARD LEAD TIME1 MeeksLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantILUMINATION TYPE, COLOR-ILUMINATION TYPE, COLOR-ELETRICAL LIFE40.000 CyclesILUMINATION TYPE, COLORAcker Switch DPDT SA (AC/DC) 120V Panel Mount, Snap-InILUMINATION TYPE, COLORSocker Switch DPDT SA (AC/DC) 120V Panel Mount, Snap-InCURRENT RATINGSA (AC/CC)COLOR - ACTUATOR/CAPBackCUCR - ACTUATOR/CAPBackCUCRA - ACTUATOR/CAPDPTCUTATOR TYPEPadle	DATA SHEET	U23J21ZQE22.pdf
TERMINATION STYLESolder LugSVITCH FUNCTIONOn-Off-OnSERIES7000PANEL CUTOUT DIMENSIONSRectangular - 19.05mm x 10.41mmPACKAGINGBulkOPERATING TEMPERATURE-30°C A S°CMOUNTING TYPEPanel Mount, Snap-InMOUSTURG SENSITIVITY LEVEL (MSL)1 (Unimited)MOUNTING TYPE-MAUFACTURER STANDARD LEAD TIME1 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILUMINATION VOLTAGE (NOMINAL)-ILUMINATION TYPE, COLOR-ELECTRICAL LIFE40,000 CyclesELECTRICAL LIFE40,000 CyclesCURRENT RATINGSACKAP SWICH DPDT SA (AC/DC) 120V Panel Mount, Snap-InCURRENT RATINGSA (AC/DC)CUDR - ACTUATOR/CAPBackCUCR - ACTUATOR/CAPBackCURATINGSA (AC/DC)CUTATOR YPEPOPTACTUATOR YPEPAREACTUATOR YPEPAREACTUATOR YPEPAREACTUATORYCAPBackCURATOR YPEPAREACTUATORYCAPPAREACTUATORYCAPPAREACTUATORYCAPPAREACTUATORYCAPPAREACTUATORYCAPPAREACTUATORYCAPPAREACTUATORYCAPPAREACTUATORYCAPPAREACTUATORYCAPPAREACTUATORYCAPPAREACTUATORYCAPPAREACTUATORYCAPPAREACTUATORYCAPPAREACTUATORYCAPPAREACTUATORYCAPP	VOLTAGE RATING - DC	28V
SWITCH FUNCTIONOn-OF-OnSERIES700PAREL CUTOUT DIMENSIONSRectangular - 19.05mm x 10.41mmPACKAGINGBulkOPERATING TEMPERATURE-0°C ~ 85°CMOUNTING TYPEPanel Mourt, Snap-InMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MECHANICAL LIFE-MANUFACTURER STANDARD LEAD TIME1 WeeksLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantILUMINATION VOLTAGE (NOMINAL)-FLUUMINATION TYPE, COLOR-FEATURESBoxy Sealed TerminalsELECTRICAL LIFE4,000 CyclesCURRENT RATINGSA (AC/OC)CURRENT RATINGSA (AC/OC)CURRENT RATINGBiackCURRENT RATINGPDTCURART NATIONPDTACTUATOR TYPEPade	VOLTAGE RATING - AC	120V
Series700PANEL CUTOUT DIMENSIONSRectangular - 19.05mm x 10.41mmPACKAGINGBulkOPERATING TEMPERATURE-0°C ~ 65°CMOUNTING TYPEPanel Mount, Snap-InMOISTURE SENSITIVIT LEVEL (MSL)(Inlinited)MOLTAGACILITE-MANUFACTURER STANDARD LEAD TIMEI WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-LEATINESEpoy Seald TerminalsELECTRICAL LIFE4,000 CyclesCURRENT RATINGSA (AC/DC)CURRENT RATINGSA (AC/DC)CURRENT RATINGBackCURART RATINGDPTCURART RATINGPADECUTUATO TYPEPadele	TERMINATION STYLE	Solder Lug
PAREL CUTOUT DIMENSIONSRectangular - 19.0Smm x 10.41mmPACKAGINGBulkOPERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPEPanel Mount, Snap-InMOISTURE SENSITIVTY LEVEL (MSL)1 (Unimited)MCHANICAL LIFE-MANUFACTURER STANDARD LEAD TIME11 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILUMINATION VOLTAGE (NOMINAL)-ILUMINATION VOLTAGE (NOMINAL)-FEATURESEposy Sealed TerminalsELECTRICAL LIFE40,000 CyclesCURRENT RATINGSA (AC/DC)CURRENT RATINGSA (AC/DC)COLOR - ACTUATOR/CAPBlackCURRENT RATINGPDPTACTUATOR TYPEPadel	SWITCH FUNCTION	On-Off-On
PACKAGINGBuikOPERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPEPanel Mount, Snap-InMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MECHANICAL LIFE-MANUFACTURER STANDARD LEAD TIME1 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILUMIINATION VOLTAGE (NOMINAL)-FLUMINATION VOLTAGE (NOMINAL)-FEATURESEpoxy Seeled TerminalsELECTRICAL LIFE40,000 CyclesDETAILED DESCRIPTIONRocker Switch DPDT 5A (AC/DC) 120V Panel Mount, Snap-InCURRENT RATINGSIAC/DC)CURRENT RATINGBlackCIRCUITDPDTACULATOR TYPEPadele	SERIES	7000
OPERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPEPanel Mourt, Snap-InMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MECHANICAL LIFE-MANUFACTURER STANDARD LEAD TIME11 WeksLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-FEATURESEpox Sealed TerminalsLECTRICAL LIFEAcody CyclesCURRENT RATINGSA (AC/DC)CURRENT RATINGSA (AC/DC)CURRENT RATINGBackCURRENT RATINGPDPTACTUATOR TYPEPadelACTUATOR TYPEPadel	PANEL CUTOUT DIMENSIONS	Rectangular - 19.05mm x 10.41mm
MOUNTING TYPEPanel Mount, Snap-InMOISTURE SENSITIVITY LEVEL (MSL)(Unlimited)MECHANICAL LIFE-MANUFACTURER STANDARD LEAD TIME11 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR6ELECTRICAL LIFE40,000 CyclesCIRCENT RATINGSACK/DQC J200 Panel Mount, Snap-InCURRENT RATINGSA (A/DC)CURRENT RATINGBackCIRCUITPDTACTUATOR TYPEPadle	PACKAGING	Bulk
MOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MCHANICAL LIFE-MANUFACTURER STANDARD LEAD TIME11 WeeksLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-FEATURESEpoxy Sealed TerminalsELECTRICAL LIFE40,000 CyclesOURRENT RATINGSACKer Switch DPDT 5A (AC/DC) 120V Panel Mount, Snap-InCURRENT RATINGBackCOLOR - ACTUATOR/CAPBackACTUATOR TYPEPDT	OPERATING TEMPERATURE	-30°C ~ 85°C
MECHANICAL LIFE.MANUFACTURER STANDARD LEAD TIME11 WeeksLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantINGRESS PROTECTION.ILLUMINATION VOLTAGE (NOMINAL).ILLUMINATION TYPE, COLOR.FEATURESBpoxy Sealed TerminalsELECTRICAL LIFE40,000 CyclesCURRENT RATINGScker Switch DPDT 5A (AC/DC) 120V Panel Mount, Snap-InCOLOR - ACTUATOR/CAPBlackCIRCUITDPDTACTUATOR TYPEPadle	MOUNTING TYPE	Panel Mount, Snap-In
MANUFACTURER STANDARD LEAD TIME11 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-FEATURESEpoxy Sealed TerminalsELECTRICAL LIFE40,000 CyclesDETAILED DESCRIPTIONScker Switch DPDT 5A (AC/DC) 120V Panel Mount, Snap-InCURRENT RATINGBlackCIRCUITDPDTACTUATOR TYPEPadle	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-FEATURESEpoxy Sealed TerminalsELECTRICAL LIFE40,000 CyclesDETAILED DESCRIPTIONRocker Switch DPDT 5A (AC/DC) 120V Panel Mount, Snap-InCURRENT RATINGBlackCIRCUITDPDTACTUATOR TYPEPadleACTUATOR TYPEPadle	MECHANICAL LIFE	-
INGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-FEATURESEpoxy Sealed TerminalsELECTRICAL LIFE40,000 CyclesDETAILED DESCRIPTIONScker Switch DPDT 5A (AC/DC) 120V Panel Mount, Snap-InCURRENT RATING5A (AC/DC)COLOR - ACTUATOR/CAPBlackCIRCUITDPDTACTUATOR TYPEPadle	MANUFACTURER STANDARD LEAD TIME	11 Weeks
ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-FEATURESEpoxy Sealed TerminalsFLECTRICAL LIFE40,000 CyclesDETAILED DESCRIPTIONRocker Switch DPDT 5A (AC/DC) 120V Panel Mount, Snap-InCURRENT RATING5A (AC/DC)COLOR - ACTUATOR/CAPBlackCIRCUITDPDTACTUATOR TYPEPadle	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ILLUMINATION TYPE, COLOR-FEATURESEpox Sealed TerminalsFLECTRICAL LIFE40,000 CyclesDETAILED DESCRIPTIONRocker Switch DPDT 5A (AC/DC) 120V Panel Mount, Snap-InCURRENT RATING5A (AC/DC)COLOR - ACTUATOR/CAPBlackCIRCUITDPDTACTUATOR TYPEPadle	INGRESS PROTECTION	-
FEATURESEpoxy Sealed TerminalsELECTRICAL LIFE40,000 CyclesDETAILED DESCRIPTIONRocker Switch DPDT 5A (AC/DC) 120V Panel Mount, Snap-InCURRENT RATING5A (AC/DC)COLOR - ACTUATOR/CAPBlackCIRCUITDPDTACTUATOR TYPEPadle	ILLUMINATION VOLTAGE (NOMINAL)	-
ELECTRICAL LIFE40,000 CyclesDETAILED DESCRIPTIONRocker Switch DPDT 5A (AC/DC) 120V Panel Mount, Snap-InCURRENT RATING5A (AC/DC)COLOR - ACTUATOR/CAPBlackCIRCUITDPDTACTUATOR TYPEPadle	ILLUMINATION TYPE, COLOR	-
DETAILED DESCRIPTIONRocker Switch DPDT 5A (AC/DC) 120V Panel Mount, Snap-InCURRENT RATING5A (AC/DC)COLOR - ACTUATOR/CAPBlackCIRCUITDPDTACTUATOR TYPEPadele	FEATURES	Epoxy Sealed Terminals
CURRENT RATING 5A (AC/DC) COLOR - ACTUATOR/CAP Black CIRCUIT DPDT ACTUATOR TYPE Paddle	ELECTRICAL LIFE	40,000 Cycles
COLOR - ACTUATOR/CAP Black CIRCUIT DPDT ACTUATOR TYPE Paddle	DETAILED DESCRIPTION	Rocker Switch DPDT 5A (AC/DC) 120V Panel Mount, Snap-In
CIRCUIT DPDT ACTUATOR TYPE Paddle	CURRENT RATING	5A (AC/DC)
ACTUATOR TYPE Paddle	COLOR - ACTUATOR/CAP	Black
	CIRCUIT	DPDT
	ACTUATOR TYPE	Paddle
	ACTUATOR MARKING	No Marking

Related Tags

C&K U23J21ZQE22	U23J21ZQE22 Distributor	U23J21ZQE22 Supplier
U23J21ZQE22 Price	U23J21ZQE22 Pictures	U23J21ZQE22 Image
U23J21ZQE22 PDF Datasheet	U23J21ZQE22 Download Datasheet	U23J21ZQE22 Datasheet
U23J21ZQE22 Stock	Buy U23J21ZQE22	Buy C&K U23J21ZQE22
C&K U23J21ZQE22	C&K Supplier	C&K Distributor
C&K U23J21ZQE22	C&K Components U23J21ZQE22	

Related Products

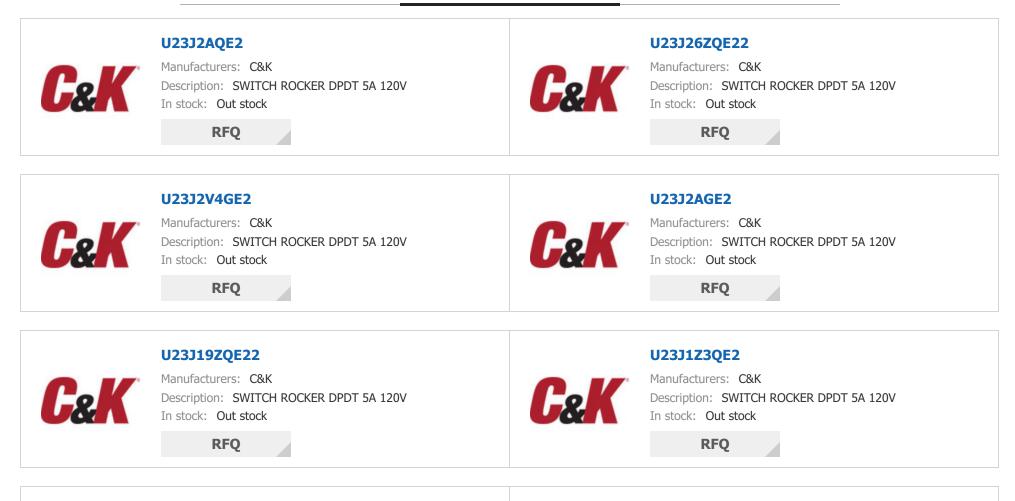



U23J1AQE2

Manufacturers: C&K Description: SWITCH ROCKER DPDT 5A 120V In stock: Out stock



U23J1AGE2

Manufacturers: C&K Description: SWITCH ROCKER DPDT 5A 120V In stock: Out stock



RFQ

U23J1V3GE2



RFQ

U23J1ZQE2



Manufacturers: C&K Description: SWITCH ROCKER DPDT 5A 120V In stock: Out stock

RFQ



Manufacturers: C&K Description: SWITCH ROCKER DPDT 5A 120V In stock: Out stock

RFQ

U23J26ZQE21

U23J2V4QE2



Manufacturers: C&K Description: SWITCH ROCKER DPDT 5A 120V In stock: Out stock

RFQ



Manufacturers: C&K Description: SWITCH ROCKER DPDT 5A 120V In stock: Out stock

RFQ

Copyright @ 2020 Reliable Distributor of Electronic Components - Ocean-Components.com

E-mail: Info@Ocean-Components.com

Address: Room 2102, Connaught Commercial Building, 185 Wan Chai Rd, Wan Chai, Hong Kong

