
RDTCR08P1T Details PDF

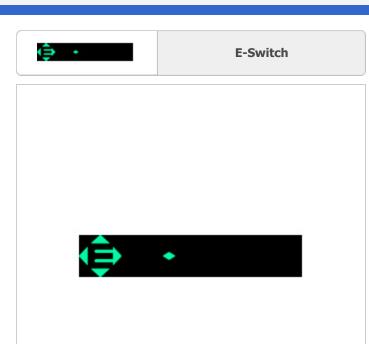

RDTCR08P1T

Part Number:	RDTCR08P1T
Manufacturer/Brand:	E-Switch
Product description	ROTARY DIP SWITCH
Datasheets:	n 1.RDTCR08P1T.pdf
	er 2.RDTCR08P1T.pdf
RoHs Status	Lead free / RoHS Compliant
Ship From	Hong Kong
Shipment Way	DHL/Fedex/TNT/UPS/EMS

REQUEST FOR QUOTATION


Image may be representation. See specifications for product details.

PART NUMBERRDTCROBY TNUMBER TURBERRDTCROBY TNUMBER TURBERROTAV DP SWTCHLEAD FREE STATUSLed free / AviS CompliantDATA SHEETRDTCROBP IT perDATA SHEETRDTCROBP IT perVOLTACE RATING4/XDCTERMINATION STYLEPC PINSERLESRDTPACKGING1/XDCTERMINATION STYLEPC SSS2OPERATING TURBER TURBERATURE4/0°C - 8°CNUMBER OF POSITIONS8MUMBER OF POSITIONS8MUMBER OF POSITIONS8MUMBER STATUS / ROHS STATUSLodoffree / 80°CNUMBER STATUS / ROHS STATUS10000 SkpsMUMBER TANDARD LEAD TIME9 VesiasLEATING22°C (SSORM)FEATING22°C (SSORM)FEATING10000 SkpsLEATING LEAD TIME9 VesiasLEATING LEAD TIME30°C (SSORM)FEATINGS10000 SkpsEATING10000 SkpsLEATINGAL LIFE10000 SkpsEATING10000 SkpsEATING10000 SkpsEATING10000 SkpsEATING10000 SkpsEATING10000 SkpsEATING10000 SkpsEATING10000 SkpsEATING10000 SkpsEATING100000 SkpsEATING1000000000000000000000000000000000000		Specifications of RDTCR08P1T
NANUFACTURERF-SwitchDESCRIPTIONROTARY DIP SWITCHLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEETin 1.00TCR08911.pdfDATA SHEETin 2.00TCR08911.pdfVORSHABLEYoo CVOLTAGE HATINGQXOCTERMINATION STYLEPC PinSERIESROTPTCH0.100* (2.54mm), FullPACMGINGSEGS2ODERATING FUPPERATURE-400* x85°CNUMBER OF POSITIONS8MOUNTING TYPEThrough HoleMOUNTING TYPE1 (Unlimited)MOUNTING TYPE1 (Unlimited)MOUNTING TYPE333° (10.00m)LEAD FREE STATUS / ROHE STATUSLead free / RoHS CompliantHEIGH ADOKE BOARD0.333° (10.00m)LEAD FREE STATUS / ROHE STATUSLead free / RoHS CompliantHEIGH ADOKE BOARD0.333° (10.00m)ELERTHOL LIFE10,000 StepsFEATURESDES (6.50mm)FEATURES10,000 StepsELERTHOL LIFE10,000 StepsELERTHOL LIFE10,000 StepsELERTHOL LIFE10,000 StepsELERTHOL LIFE10,000 StepsELERTHING10,000 StepsELERTHING10,000 StepsELERTHING10,000 StepsELERTHING10,000 StepsELERTHING10,000 StepsELERTHOL LIFE10,000 StepsELERTHOL LIFE0.001 StepsELERTHOL HATERIALCordCONTACT HATERIALCordCONTACT HATERIALCordCONTACT HATERIALCord		
DeSCRIPTIONRCTARY DIP SWTCHLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDaTA SHEETis 1.807C008P11.pdfWASHABLEYesVOCTAGE RATING42VDCTERNINATION STYLEPC PinSERIESRDTPICH0.100° (2.54mm), FullPACAGINGTubeOPERATING TEMPERATURE656692OPERATING TEMPERATURE656692OPERATING TEMPERATURE656692NUMBER OF POSITIONS8MUDISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)NUMER CORE STATUS / ROHS STATUS63600MUDISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MECHANICAL LIFE10.000 StepsMUDISTURE STATUS / ROHS STATUSLead free / RohS CompliantELEGAT RADE ROBDIONS0.250mm)ELEGAT RADE ROBDIONS0.250mm)ELEGAT RADE ROBDIONS0.250mm)ELEGAT RADE ROBDIA0.2000 StepsFATURES10.000 StepsELEGAT RADE ROBDIA0.2000 StepsELEGAT RADE ROBDIA0.2000 StepsELEGAT RADE ROBDIA0.2000 StepsELEGAT RADE RADE ISOMA ALZONC0.000 StepsELEGAT RADE RADE ISOMA ALZONC0.000 StepsDETAILED DESCRIPTIONDe Switch Octal & Position Through Hole Rotary for Tool Actuator 150mA 42VDCCORTACT TARTERIAL-CONTACT RATERIAL-CONTACT RATERIAL-CONTACT RATERIAL-CONTACT RATERIAL-CONTACT RATERIAL-CONTACT RATERIAL-CONTACT RATERIAL	PART NUMBER	RDTCR08P1T
Lead FRee STATUS / ROHS STATUSLead free / RoHS CampiantDarta SHEETII: ROTCROBPIT.pdfVASHABLEYesVOLTACE RATING42/DCTERMINATION STYLERC PinSERIESROTPATCHLolo" (2.54mm), FullPACKAGINGTubeOTHER NAMES665992OPERATING TEMPERATURE40°C ~ 85°CNUMBER OF POSITIONS8MOUNTUS TYPEThrough HoleMOUNTUS TYPE10,000 StepsMANUPACTURES STATUS10,000 StepsMANUPACTURES STATUS TEMPERATURE0.333' (10.00mm)LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.256' (6.50mm)FEATURES1000 StepsDETAILISE DESCRIPTIONOp Switch Catal 8 Position Through Hole Rotary for Tool Actuator 150mA 42VDCCURRENT RATING10,000 StepsLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantLECIGT ABOVE BOARD0.256' (6.50mm)EATURES150mkCURRENT RATING150mkCURRENT RATING150mkCURRENT RATING150mkCURRENT RATING150mkCURRENT RATING6deCURRENT RATINGCodalROUTS HATERIAL-COUTACT FINSHCodalROUTS HATERIAL-ROUTS HATERIAL-ROUTS HATERIALCodalROUTS HATERIALCodalROUTS HATERIAL-ROUTS HATERIAL-ROUTS HATERIAL-ROUTS HATERIAL- <t< td=""><td>MANUFACTURER</td><td>E-Switch</td></t<>	MANUFACTURER	E-Switch
DATA SHEETII.NDTCROBPIT.pdfVARSHABLEYESVOLTACE RATING42VDCTERMINATION STYLEPC PinSERIESROTPICTA0.000 (2.54mm), FullPACAGINGTobeOTHER NAMES665692OPERATING TEMPERATURE40°C ~ 85°CNUMBER OF POSITIONS8MOUNTING TYPE10,000 R2-60MOUNTING TYPE10,000 R2-60MOUNTING TYPE10,000 R2-60MOUNTING TYPE10,000 R2-60MOUNTING TYPE10,000 R2-60MOUNTING TYPE0.33°2 (10.00mm)LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.25° (6.50mm)FETURES10,000 Sep5DETAILED DESCRIPTIONOp Switch Catal 8 Position Through Hole Rotary for Tool Actuator 150m 4 24/DCCURRER RATING150mkCURRER RATING150mkCURRER RATING150mkCURRER RATING150mkCURRER RATING150mkCURRER RATING150mkCURRER RATING60dCURRER RATING60dCURCUTCuralBOOY MATERIAL-CULLATOR TYPERotary for Tool	DESCRIPTION	ROTARY DIP SWITCH
DATA SHEETE 2.RDTCR08P1T.pdfWASHABLEYesVOLTAGE RATING42VDCTERMINATION STYLEPC PinSERIESRDTPATCH0.100° (2.54mm), FullPACKAGINGTubeOTHER NAMESEGS692OPERATING TEMPERATURE40°C ~ 85°CNUMBER OF POSITIONS8MOUNTING TYPEThrough HoleMOUNTING TYPE10000 StepsMANUFACTURER STANDARD LEAD TIME9 WeeksLENGTH0.333° (10.00mm)FEATURES107-20 StepsFEATURES10000 StepsLENGTH0.236° (6.50mm)FEATURES10000 StepsLENGTH0.236° (6.50mm)FEATURES10000 StepsLENGTH0.256° (6.50mm)FEATURES10000 StepsCONTACT MATERIAL10000 StepsCONTACT MATERIAL10000 StepsCONTACT NOTES10000 StepsFEATURES10000 StepsCONTACT NOTES10000 StepsCONTACT FINISHGadCONTACT FINISHGadCONTACT FINISHGadCONTACT FINISHCatalCONTACT FINISHCatalCONTACT FINISHGadCONTACT FINISHCatalCONTACT FINISHCatalCONTACT NOTESFOR TOOL	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
VOLTAGE RATING42VOCTERMINATION STYLEPC PinSERIESRDTPITCH0.100° (2.54mm), FullPACKAGINGTubeOTHER NAMESEGS692OPERATING TEMPERATURE-49°C ~ 85°CNUMERG OF POSITIONS8MOUNTING TYPEThrough HoleMOUNTING TYPE0.000 SupsMAUFACTURER STANDARD LEAD TIME9.WeeksLENGTH0.393° (10.00mm)LEAG FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOAD0.256° (5.50m)EATURESJool SupsCICARLETJOOD SupsLEIGHT ABOVE BOAD0.256° (5.50m)EATURESJOOD SupsCONTACT JING STATUSLead free / ROHS CompliantLEIGHT ABOVE BOAD0.256° (5.50m)EATURESJOOD SupsCONTACT MATERIALJOOD SupsCONTACT TINSGoldCONTACT TINSGoldCONTACT TINSGoldCONTACT FINISHGoldCONTACT FINISHGoldCONTACT FINISHGoldCONTACT TATIAL-CONTACT TATIALGoldCONTACT TATIALGoldCONTACT TATIALGoldCONTACT FINISHGoldCONTACT TATIAL-CONTACT TATIALGoldCONTACT TATIALGoldCONTACT TATIALGoldCONTACT TATIAL-CONTACT TATIALGoldCONTACT TATIALGoldCONTACT TATIAL-CONTACT TATIAL-CONTAC	DATA SHEET	
TERMINATION STYLEPC PinSERIESRDTPTCH0.100° (2.54mm), FullPACKAGINGTubeOTHER NAMESEG592OPERATING TEMPERATURE-40°C ~ 85°CNUMBER OF POSITIONS8MOUNTING TYPEThrough HoleMOUNTING TYPE0.000 StepsMANUFACTURER STANDARD LEAD TIME9 WeeksLENGTH0.393° (10.00mm)LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.256° (6.50mm)ELECTRICAL LIFE10,000 StepsDETAILED DESCRIPTIONDip Switch Octal 8 Position Through Hole Rotary for Tool Actuator 150mA 42VDCCURRENT RATING1000 StepsDETAILED DESCRIPTIONDip Switch Octal 8 Position Through Hole Rotary for Tool Actuator 150mA 42VDCCONTACT FINISHGoldCONTACT FINISHGoldCONTACT FINISHGoldCONTACT FINISHCatalCONTACT FINISHGoldCONTACT FINISHCatalCONTACT FINISHGoldCONTACT FINISHCatalCONTACT FINISHGoldCONTACT FINISHCatalCONTACT FINISHScatary for ToolCONTACT FINISHGoldCONTACT FINISHCatalCONTACT FINISHScatary for ToolCONTACT FINISHGoldCONTACT FINISHScatary for ToolCONTACT FINISHFor ToolCONTACT FINISHScatary for ToolCONTACT FINISHScatary for ToolCONTACT FINISHScatary for ToolCONTACT	WASHABLE	Yes
SERIESRDTPICH0.100° (2.54mm), FullPACKAGINGTubeCOTHER NAMESEGS692OPERATING TEMPERATURE-40°C ~ 85°CNUMBER OF POSITIONS8MOUNTING TYPEThrough HoleMOUNTING TYPE0,000 StepsMANUFACTURER STANDADD LEAD TIME9 WeeksLENGTH0,303° (10.00mm)LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0,256° (6.50mm)FEATURES1960 StepsELECTRICAL LIFE0,000 StepsDETAILED DESCRIPTIONDip Switch Octal 8 Position Through Hole Rotary for Tool Actuator 150mA 42VDCCONTACT MATERIAL-CONTACT MATERIALGoldCONTACT FINISHGoldCONTACT FINISHGoldCONTACT FINISHCotalFOOY MATERIAL-CONTACT TYPERotary for ToolACTUATOR TYPERotary for Tool	VOLTAGE RATING	42VDC
PITCH0.100° (2.54mm), FullPACKAGINGTubeOTHER NAMESES6592OPERATING TEMPERATURE-40°C ~ 85°CNUMBER OF POSITIONS8MOUTING TYPEThrough HoleMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MAUFACTURER STANDARD LEAD TIME9 WeeksLENGTH0.303° (10.00m)LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.255° (6.50m)FEATURES10,000 StepsLECATICAL LIFE0.000 StepsLECATICAL LIFE10,000 StepsLECATICAL LIFE10,000 StepsLECATICAL LIFE10,000 StepsELECATICAL LIFE10,000 StepsDETAILED DESCRIPTION0 StepsCONTACT MATERIAL-CONTACT MATERIAL-CONTACT FINISHGoldCONTACT FINISHGoldCONTACT FINISH-ECUTICAL LIFE0.ctal XCONTACT FINISH-CONTACT FINISH-CONTACT FINISHCotalCONTACT FINISH-CONTACT FINISH<	TERMINATION STYLE	PC Pin
PACKAGINGTubeOTHER NAMESEGS692OPERATING TEMPERATURE440°C ~ 85°CNUMBER OF POSITIONS8MOUNTING TYPEThrough HoleMOISTURE SENSITIVITY LEVEL (MSL)1 (ulimited)MECHANICAL LIFE10,000 StepsMANUFACTURER STANDARD LEAD TIME9 WeeksLENGTH0.393° (10.00mm)LEAG THE ABOVE BOARD0.256° (6.50mm)FEALURES10,000 StepsEALURES10,000 StepsLENGTH0.256° (6.50mm)FEALURES10,000 StepsDETAILED DESCRIPTION1000 StepsDETAILED DESCRIPTION1000 StepsCONTACT MATERIAL10,000 StepsDETAILED DESCRIPTION1000 StepsCONTACT MATERIAL10,000 StepsCONTACT MATERIAL150MACONTACT MATERIAL6oldCONTACT FINISHGoldCONTACT FINISH6oldCONTACT FINISH6calFACTUATOR TYPERotary OT Tool	SERIES	RDT
OTHER NAMESEGS692OPERATING TEMPERATURE-40°C ~ 85°CNUMBER OF POSITIONS8MOUNTING TYPEThrough HoleMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MCHANICAL LIFE0.000 StepsMANUFACTURER STANDARD LEAD TIME9 WeeksLENGTH0.393° (10.00mm)LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantHEIGHT ABOVE BOARD0.256° (6.50mm)FEATURES10000 StepsELECTRICAL LIFE0.000 StepsELECTRICAL LIFE0.000 StepsCURRENT RATING1000 StepsGOUTACT MATERIAL-CONTACT MATERIAL-CONTACT FINISHGoldCONTACT FINISHGoldCONTACT FINISH-COUTACT TYPERotary OT OOL	PITCH	0.100" (2.54mm), Full
OPERATING TEMPERATURE40°C ~ 8°CNUMBER OF POSITIONS8MOUNTING TYPEThrough HoleMOINTING TYPE1 (Unlimited)MOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MECHANICAL LIFE0,000 StepsMANUFACTURER STANDARD LEAD TIME9 WeeksLENGTH0.333° (10.00mm)LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.256° (6.50mm)FEATURES10,000 StepsELECTRICAL LIFE0.000 StepsDETAILED DESCRIPTIONDip Switch Octal 8 Position Through Hole Rotary for Tool Actuator 150mA 42VDCCORRENT RATING50mACONTACT FINISHGoldCONTACT FINISHOctalBODY MATERIAL-ACTUATOR TYPERotary for Tool	PACKAGING	Tube
NUMBER OF POSITIONS8MOUNTING TYPEThrough HoleMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MECHANICAL LIFE10,000 StepsMANUFACTURER STANDARD LEAD TIME9 WeeksLENGTH0.393' (10.00mm)LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantHEIGHT ABOVE BOARD0.256'' (6.50mm)FEATURES10,000 StepsELECTRICAL LIFE10,000 StepsELECTRICAL LIFE10,000 StepsELECTRICAL LIFE10,000 StepsDETAILED DESCRIPTIONDip Switch Octal 8 Position Through Hole Rotary for Tool Actuator 150mA 42VDCCURRENT RATING150mACONTACT MATERIAL-CONTACT FINISHGoldBODY MATERIAL-BODY MATERIAL-ACTUATOR TYPERotary for Tool	OTHER NAMES	EG5692
MOUNTING TYPEThrough HoleMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlinited)MCHANICAL LIFE10,000 StepsMANUFACTURER STANDARD LEAD TIME9 WeeksLENGTH0.393" (10.00mm)LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.256" (6.50mm)FEATURES1060 StepsDETAILED DESCRIPTIONDip Switch Octal 8 Position Through Hole Rotary for Tool Actuator 150mA 42VDCCURRENT RATINGSiomACONTACT FINISHGoldBODY MATERIAL-ACTUATOR TYPERatary for Tool	OPERATING TEMPERATURE	-40°C ~ 85°C
MOISTURE SENSITIVITY LEVEL (MSL)I (Unlimited)MCHANICAL LIFE10,000 StepsMANUFACTURER STANDARD LEAD TIME9 WeeksLENGTH0.393" (10.00mm)LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.256" (6.50mm)FEATURES1967 - Dust Tight, WaterproofELECTRICAL LIFE0.000 StepsDETAILED DESCRIPTIONDip Switch Octal 8 Position Through Hole Rotary for Tool Actuator 150mA 42VDCCURRENT RATING-CONTACT FINISHGoldEDOY MATERIAL-BODY MATERIAL-ACTUATOR TYPERotary for Tool	NUMBER OF POSITIONS	8
MECHANICAL LIFE10,000 StepsMANUFACTURER STANDARD LEAD TIME9 WeeksLENGTH0.393" (10.00mm)LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.256" (6.50mm)FEATURES10,000 StepsELECTRICAL LIFE0.000 StepsDETAILED DESCRIPTIONDip Switch Octal 8 Position Through Hole Rotary for Tool Actuator 150mA 42VDCCURRENT RATING50mACONTACT FINISHGoldCIRCUITOctalBODY MATERIAL-ACTUATOR TYPERotary for Tool	MOUNTING TYPE	Through Hole
MANUFACTURER STANDARD LEAD TIME9 WeeksLENGTH0.393" (10.00mm)LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.256" (6.50mm)FEATURES1P67 - Dust Tight, WaterproofELECTRICAL LIFE10,000 StepsDETAILED DESCRIPTIONDip Switch Octal 8 Position Through Hole Rotary for Tool Actuator 150mA 42VDCCURRENT RATING-CONTACT FINISHGoldCIRCUITOctalBODY MATERIAL-ACTUATOR TYPERotary for Tool	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
LENGTH0.393° (10.00mm)LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.256° (6.50mm)FEATURES1967 - Dust Tight, WaterproofELECTRICAL LIFE10,000 StepsDETAILED DESCRIPTIONDip Switch Octal 8 Position Through Hole Rotary for Tool Actuator 150mA 42VDCCURRENT RATING150mACONTACT MATERIAL-CONTACT FINISHGoldDETOLITIONOctalBODY MATERIAL-ROUTACT FINISH-ROUTACT TYPERotary for Tool	MECHANICAL LIFE	10,000 Steps
LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantHEIGHT ABOVE BOARD0.256" (6.50mm)FEATURESIP67 - Dust Tight, WaterproofELECTRICAL LIFE0.000 StepsDETAILED DESCRIPTIONDip Switch Octal 8 Position Through Hole Rotary for Tool Actuator 150mA 42VDCCURRENT RATING150mACONTACT MATERIAL-CONTACT FINISHGoldBODY MATERIAL-ROTUATOR TYPERotary for Tool	MANUFACTURER STANDARD LEAD TIME	9 Weeks
HEIGHT ABOVE BOARD0.256" (6.50mm)FEATURESIP67 - Dust Tight, WaterproofELECTRICAL LIFE0.000 StepsDETAILED DESCRIPTIONDip Switch Octal 8 Position Through Hole Rotary for Tool Actuator 150mA 42VDCCURRENT RATING150mACONTACT MATERIAL-CONTACT FINISHGoldICRCUITOctalBODY MATERIAL-ROTUATOR TYPERotary for Tool	LENGTH	0.393" (10.00mm)
FEATURESIP67 - Dust Tight, WaterproofELECTRICAL LIFE10,000 StepsDETAILED DESCRIPTIONDip Switch Octal 8 Position Through Hole Rotary for Tool Actuator 150mA 42VDCCURRENT RATING150mACONTACT MATERIAL-CONTACT FINISHGoldCIRCUITOctalBODY MATERIAL-ACTUATOR TYPERotary for Tool	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ELECTRICAL LIFE10,000 StepsDETAILED DESCRIPTIONDip Switch Octal 8 Position Through Hole Rotary for Tool Actuator 150mA 42VDCCURRENT RATING150mACONTACT MATERIAL-CONTACT FINISHGoldCIRCUITOctalBODY MATERIAL-ACTUATOR TYPERotary for Tool	HEIGHT ABOVE BOARD	0.256" (6.50mm)
DETAILED DESCRIPTIONDip Switch Octal 8 Position Through Hole Rotary for Tool Actuator 150mA 42VDCCURRENT RATING150mACONTACT MATERIAL-CONTACT FINISHGoldCIRCUITOctalBODY MATERIAL-ACTUATOR TYPERotary for Tool	FEATURES	IP67 - Dust Tight, Waterproof
CURRENT RATING150mACONTACT MATERIAL-CONTACT FINISHGoldCIRCUITOctalBODY MATERIAL-ACTUATOR TYPERotar for Topal	ELECTRICAL LIFE	10,000 Steps
CONTACT MATERIAL-CONTACT FINISHGoldCIRCUITOctalBODY MATERIAL-ACTUATOR TYPERotar for Tool	DETAILED DESCRIPTION	Dip Switch Octal 8 Position Through Hole Rotary for Tool Actuator 150mA 42VDC
CONTACT FINISHGoldCIRCUITOctalBODY MATERIAL-ACTUATOR TYPERotar fool	CURRENT RATING	150mA
CIRCUITOctalBODY MATERIAL-ACTUATOR TYPERotary for Tool	CONTACT MATERIAL	-
BODY MATERIAL - ACTUATOR TYPE Rotary for Tool	CONTACT FINISH	Gold
ACTUATOR TYPE Rotary for Tool	CIRCUIT	Octal
	BODY MATERIAL	-
ACTUATOR LEVEL Flush, Recessed	ACTUATOR TYPE	Rotary for Tool
	ACTUATOR LEVEL	Flush, Recessed

Related Tags

E-Switch RDTCR08P1T	RDTCR08P1T Distributor	RDTCR08P1T Supplier
RDTCR08P1T Price	RDTCR08P1T Pictures	RDTCR08P1T Image
RDTCR08P1T PDF Datasheet	RDTCR08P1T Download Datasheet	RDTCR08P1T Datasheet
RDTCR08P1T Stock	Buy RDTCR08P1T	Buy E-Switch RDTCR08P1T
E-Switch RDTCR08P1T	E-Switch Supplier	E-Switch Distributor
E-Switch RDTCR08P1T		

Related Products

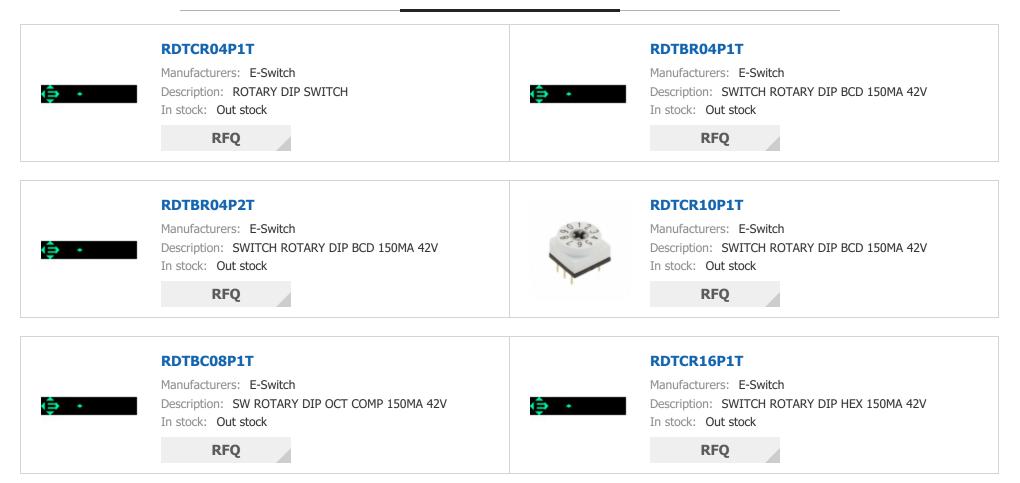

RDTCR16R2T




Manufacturers: E-Switch Description: SWITCH ROTARY DIP HEX 150MA 42V In stock: Out stock



RDTCR16R1T

Manufacturers: E-Switch Description: SWITCH ROTARY DIP HEX 150MA 42V In stock: Out stock

RFQ

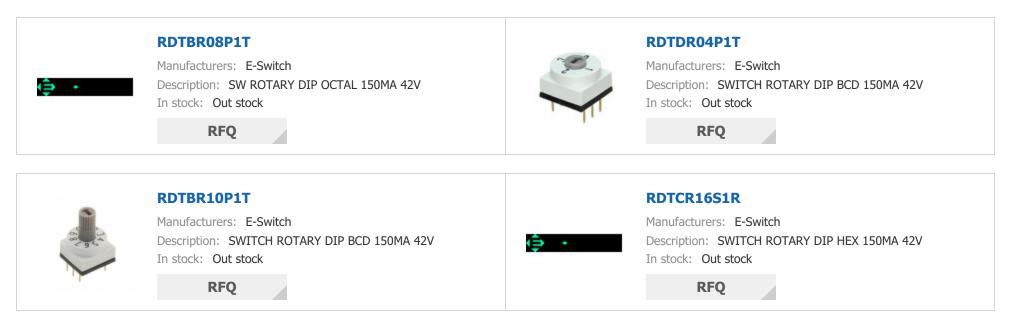

Copyright © 2020 Reliable Distributor of Electronic Components - Ocean-Components.com

E-mail: Info@Ocean-Components.com

Address: Room 2102, Connaught Commercial Building, 185 Wan Chai Rd, Wan Chai, Hong Kong

