

CeK	C&K	
<b>G</b> &K		

# TMCGF5ST1540C

Part Number:	TMCGF5ST1540C
Manufacturer/Brand:	С&К
Product description	SWITCH SNAP ACTION SPDT 1A 125V
Datasheets:	TMCGF5ST1540C.pdf
RoHs Status	Lead free / RoHS Compliant
Ship From	Hong Kong
Shipment Way	DHL/Fedex/TNT/UPS/EMS

### **REQUEST FOR QUOTATION**


Image may be representation. See specifications for product details.

AANUFACTURERC&KVANUFACTURERSWITCH SNAP ACTION SPDT 1A 125VEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantEAT SHEETSTMCGFSST1540C.pdfVOLTAGE RATING - DC30VVOLTAGE RATING - ACQuick Connect - 0.187" (4.7mm)VOLTAGE RATING - ACMERHINATION STYLEQuick Connect - 0.187" (4.7mm)WITCH FUNCTIONOn-MomVELEASE FORCE9.000gfRETRAVEL0.161" (1.1mm)ACKAGINGBulkVERTRAVEL0.055" (1.9mm)OPERATING FORCESSGN ONTOPERATING FORCE100111101OPERATING FORCE100111101ADIAL FLATER STATUS / ROHS STATUSChasis MountOPERATING FORCE1011111101ADIAL FLATER STATUS / ROHS STATUSLead free / ROHS CompliantADIAL FLATER STATUS / ROHS STATUSLead free / ROHS CompliantADIAL FLATER STATUS / ROHS STATUSLead free / ROHS CompliantADIAL FLATER STATUS / ROHS STATUSLead free / ROHS CompliantADIAL FLATER STATUS / ROHS STATUSLead free / ROHS CompliantADIAL FLATER STATUS / ROHS STATUSLead free / ROHS CompliantADIAL FLATER STATUS / ROHS STATUSLead free / ROHS CompliantADIAL FLATER STATUS / ROHS STATUSLead free / ROHS CompliantADIAL FLATER STATUS / ROHS STATUSLead free / ROHS CompliantADIAL FLATER STATUS / ROHS STATUSLead free / ROHS CompliantADIAL FLATER STATUS / ROHS STATUSLead free / ROHS CompliantADIAL FLATER STATUS / ROHS STATUSLead free / ROHS Compliant<		Specifications of TMCGF5ST1540C
AANUFACTURERC&KVANUFACTURERSWITCH SNAP ACTION SPDT 1A 125VEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantEAT SHEETSTMCGFSST1540C.pdfVOLTAGE RATING - DC30VVOLTAGE RATING - ACUsik Connect - 0.187" (4.7mm)VOLTAGE RATING - ACMCERLESMWITCH FUNCTIONOn-MomVELEASE FORCE9.000gfRETRAVEL0.161" (4.1mm)ACKAGINGBulkVERTRAVEL0.075" (1.9mm)OPERATING FORCE55°C ~ 15°COPERATING FORCE6.000" (15.2mm)OPERATING FORCE10.011111ADUNTING TYPEChasis MountADUNFACTURER STATUS / ROHS STATUS10.1011111ADI FERLE STATUS / ROHS STATUS10.10111111 </td <td></td> <td></td>		
SescriptionSWITCH SNAP ACTION SPDT 1A 125VEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantAAT A SHEETDTMCGFSST1540C.pdfROLTAGE RATING - DC30VYOLTAGE RATING - ACUsik Connect - 0.187" (4.7mm)WITCH FUNCTIONOn-MomWITCH FUNCTIONMulticationWITCH FUNCTION9.000gfWITCH FUNCTION0.161" (4.1mm)WITCH FUNCTION0.161" (4.1mm)WITCH FUNCTION0.161" (4.1mm)WITCH FUNCTION0.000gfRETRAVEL0.000gfACKAGINGBulkNUPERATING TEMPERATURE0.50°C ^ 150°COPERATING FORCE45gfMOUNTING TYPE0.600" (15.2mm)MULFARTURE SENSITIVITY LEVEL (MSL)10.101mited)MULFARTURE STATUS / ROHS STATUS14WeeksEAD FREE STATUS / ROHS STATUS1.61NARESS PROTECTION-NARESS PROTECTION0.302" (0.81mm)NARESS PROTECTION1.012NARESS PROTECTION1.012NARESS PROTECTION0.302" (0.81mm)NARESS PROTECTION1.012NARESS PROTECTION1.012 <t< td=""><td>PART NUMBER</td><td>TMCGF5ST1540C</td></t<>	PART NUMBER	TMCGF5ST1540C
EAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEETDTMCGFSST1540C.pdfNOLTAGE RATING - DC30VCOLTAGE RATING - ACLSVCOLTAGE RATING - ACQuick Connect - 0.187" (4.7mm)WITCH FUNCTIONOn-MomRERESMCELEASE FORCE9.000gfRETRAVEL0.161" (4.1mm)ACKAGINGBulkVERTRAVEL0.075" (1.9mm)OPERATING FORCE55°C ~ 150°COPERATING FORCE6.000" (15.2mm)OPERATING FORCE10.01mited)OPERATING FORCE10.01mited)ADUNTING TYPEChassis MountADUNTING TYPE14.WeeksADUNTING TYPE14.WeeksADUNTING TYPE STATUS / ROHS STATUSLead free / ROHS CompliantADURACTURER STATUS / ROHS STATUS1.01mited)RETARE STATUS / ROHS STATUS1.01mited)CASSIS PROTECTION-CASTURES PROTECTION-CASTURES RATURES / ROHS STATUS1.01mited)CASTURES ROTECTION-CASTURES ROTECTION-CASTURES RATURES / ROHS STATUS0.032" (0.81mm)CARESS ROTECTION-CASTURES RATURES AND ADD LEAD TIME0.032" (0.81mm)CARESS ROTECTION-CASTURES RATURES-CARESS ROTECTION-CARESS RATURES-CARESS RATURES AND ADD LEAD TIME-CARESS ROTECTION-CARESS ROTECTION-CARESS ROTECTION-CARESS ROTECTION-CARESS ROTECTIO	MANUFACTURER	C&K
AAT A SHEETImmodel The CGFSST1540C.pdfPOLTAGE RATING - DC30VPOLTAGE RATING - AC125VERMINATION STYLEQuick Connect - 0.187" (4.7mm)WITCH FUNCTION0-MOnWITCH FUNCTION0-MON <td< td=""><td>DESCRIPTION</td><td>SWITCH SNAP ACTION SPDT 1A 125V</td></td<>	DESCRIPTION	SWITCH SNAP ACTION SPDT 1A 125V
Procentage Rating - DC     30V       VOLTAGE RATING - DC     30V       VOLTAGE RATING - AC     125V       ERMINATION STYLE     Quick Connect - 0.187" (4.7mm)       WITCH FUNCTION     0n-Mom       WITCH FUNCTION     0000°       WITCH FUNCTION     000°	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
Coltage Rating - AC125VFERMINATION STYLEQuick Connect - 0.187" (4.7mm)WITCH FUNCTIONOn-MomWITCH FUNCTIONTMRELEASE FORCEMO00gfRETRAVEL0.000gfACKAGINGBulkVERTRAVEL0.75" (1.9mm)ACKAGING EMPERATURE6.50°C - 150°CAPERATING FORCE45gfADUNTING TYPEChasis MountADUNTING TYPE1.01minted)ADUNFACTURER STANDARD LEAD TIME1.01minted)ADUNFACTURER STANDARD LEAD TIME1.02minted)ADUNFACTURER STANDARD LEAD TIME1.02minted)ADURESS PROTECTION-ADURESS PROTECTION-ADURESS PROTECTION0.032" (0.81mm)ADUREST RATURES1.023" (0.81mm)ADUREST RATURES1.023" (0.81mm)ADURENT RATING1.022" (0.81mm)ADURANT1.022" (0.81mm)ADURANT1.022" (0.81mm)ADURANT1.022" (0.81mm)ADURANT1.022" (0.81mm)ADURANT1.022" (0.81mm)ADURANT1.022" (0.81mm)ADURANT1.022" (0.81mm) <td< td=""><td>DATA SHEET</td><td>TMCGF5ST1540C.pdf</td></td<>	DATA SHEET	TMCGF5ST1540C.pdf
ERMINATION STYLEQuick Connect - 0.187" (4.7mm)WITCH FUNCTIONOn-MomERLESTMRELEASE FORCE9.000gfRETRAVEL0.0161" (4.1mm)ACKAGINGBulkVERTRAVEL0.057" (1.9mm)OPERATING TEMPERATURE6.000" (15.2mm)OPERATING FORCE45gfOPERATING FORCE1001mited)OPERATING FORCE1001mited)ODISTURE SENSITIVITY LEVEL (MSL)1010mited)ACKAGING1020mited)ACKAGING1020mited)ACKAGING1020mited)ADISTRES SPROTECTION-ADIFERE STATUS / ROHS STATUSLead free / ROHS CompliantAGRESS PROTECTION-AGRESS PROTECTION-ATURES-ATURES-ATURES-ATURES-ADIFERENTIAL TRAVEL0.032" (0.81mm)AURANTA-	VOLTAGE RATING - DC	30V
WITCH FUNCTIONOn-MomKERLESMKELEASE FORCE9.000gfRETRAVEL0.161"(4.1mm)ACKAGINGBlkNERTRAVEL0.075"(1.9mm)OPERATING TEMPERATURE0.600"(15.2mm)OPERATING FORCE45gfADUNTING TYPEChasis MountACKAGING1.01Imited)ADUNTING TYPE1.01Imited)ADUNTING TYPE1.02Imited)ADUNTING TYPE1.02Imite	VOLTAGE RATING - AC	125V
ERIESTMERLEASE FORCE9.000gfRETRAVEL0.161" (4.1mm)ACKAGINGBukACKAGING0.075" (1.9mm)AVERTRAVEL0.075" (1.9mm)AVERTRAVEL0.600" (15.2mm)AVERTRAVEL6.000" (15.2mm)AVERTATING FORCE4.000" (10.1mm)ADUNTING TYPE0.1011110" (10.1mm)ANDIFACTURE SENSITIVITY LEVEL (MSL)1.0111110" (10.1mm)ANDIFACTURE STATUS / ROLES TATUS1.01011110" (10.1mm)ADURTRATING STATUS1.01011110" (10.1mm)ADURTRATING STATUS1.01011110" (10.1mm)ADURTRATING NORTORIA1.01011110" (10.1mm)ADURTRATING STATUS0.01011110" (10.1mm)ADURTRATING0.01011110" (10.1mm)ADURTRATING0.0101110" (10.1mm)ADURTRATING0.0101110" (10.1mm)ADURTRATING0.0101110" (10.1mm)ADURTRATING0.0101110" (10.1mm)ADURTRATING0.0101110" (10.1mm)ADURTRATING0.0101110" (10.1mm)ADURTRATING0.0101110" (10.1mm)ADURTRATING0.0101110" (10.1mm)ADURTRATING0.010	TERMINATION STYLE	Quick Connect - 0.187" (4.7mm)
Release Force9.000gfRetravel0.61° (4.1mm)Retravel0.61° (4.1mm)AckaGINGBukAckaGING0.75° (1.9mm)Aretravel0.50° (1.50°C)Apperating Force0.60° (15.2mm)ADUTING FORCE0.600° (15.2mm)ADUTING TYPEChasis MountADUTING TYPE0.1011110 (1.000)ADUTING TYPE1.0111110 (1.000)ADUTING TYPE <td< td=""><td>SWITCH FUNCTION</td><td>On-Mom</td></td<>	SWITCH FUNCTION	On-Mom
RETRAVEL     0.161" (4.1mm)       VACKAGING     Bulk       VACKAGING     0.075" (1.9mm)       VPERATING TEMPERATURE     0.075" (1.9mm)       VPERATING TEMPERATURE     55°C ~ 150°C       VPERATING FORCE     0.600" (15.2mm)       VPERATING FORCE     45gf       VOUNTING TYPE     Chasis Mount       VOUNTING TYPE     1 (Unlimited)       VOLATINE SENSITIVITY LEVEL (MSL)     1 (Unlimited)       VECHANICAL LIFE     -       VALUE SENSITIVITY LEVEL (MSL)     14 Weeks       VALUE SENSITIVITY LEVEL (MSL)     Lead free / RoHS Compliant       VALUE SENSITIVITY LEVEL (MSL)     -       VALUE SENSITIVITY LEVEL (MSL)     -       VALUE SENSITIVITY LEVEL (MSL)     Lead free / RoHS Compliant       VALUE SENS PROTECTION     -       VALUE SENSITIVITY (MOL STATUS     -       VALUE SENSITIVE     -       VALUE SENSITIVE SENSITIVE     -       VALUE SENSITIVE	SERIES	ТМ
ACKAGING Bulk DVERTRAVEL 0.075" (1.9mm) DVERATING TEMPERATURE 0.55°C ~ 150°C DVERATING POSITION 0.600" (15.2mm) DVERATING FORCE 4.50" (1.01mited) DVERATING FORCE 1.01" (1.01mited) DVERATING FORCE 1.01" (1.01mited) DVERATING TYPE 0.10" (1.01mited) DVERATING TYPE 1.01" (1.01mited) DVERATING SENSITIVITY LEVEL (MSL) 1.01" (	RELEASE FORCE	9.000gf
WERTRAVEL0.075" (1.9mm)OPERATING TEMPERATURE55°C ~ 150°COPERATING POSITION0.600" (15.2mm)OPERATING FORCE45gfOUNTING TYPEChasis MountIOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)ICHANICAL LIFE-IANUFACTURER STANDARD LEAD TIME14 WeeksIANUFACTURER STANDARD LEAD TIMELead free / ROHS CompliantIREGRES PROTECTION-IRECTRICAL LIFE-IATURES0.32" (0.81mm)ILECTRICAL LIFEIA (AC/DC)ILECTRICAL	PRETRAVEL	0.161" (4.1mm)
PERATING TEMPERATURE -55°C ~ 150°C OPERATING POSITION 0.600" (15.2mm) OPERATING PORCE 45g ODUNTING TYPE 500 (1000) ODUNTING TYPE 1000 (1000) ODUSTURE SENSITIVITY LEVEL (MSL) 1000 ODUSTURE SENSITIVITY LEVEL (MSL) 1000 ODUSTURE STANDARD LEAD TIME 1000 ANUFACTURER STANDARD LEAD TIME 1000 EAD FREE STATUS / ROHS STATUS 1000 ODUSTURES PROTECTION 1000 EATURES PROTECTION 1000 EATURES 10000 EATURES 1000 EATURES 10000 EATURES 1	PACKAGING	Bulk
PPERATING POSITION0.600" (15.2mm)OPERATING FORCE45gfADUNTING TYPEChasis MountADUSTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)ARCHANICAL LIFE-ANUFACTURER STANDARD LEAD TIME14 WeeksBAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantARTINES-ARTINES-ALTINES-	OVERTRAVEL	0.075" (1.9mm)
APPERATING FORCE45gfADUNTING TYPEChassis MountADUSTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)ARCHANICAL LIFE-ANUFACTURER STANDARD LEAD TIME14 WeeksBAR FREE STATUS / ROHS STATUSLead free / ROHS CompliantARRESS PROTECTION-ARTURES-ALTURES<	OPERATING TEMPERATURE	-55°C ~ 150°C
AOUNTING TYPE Chassis Mount AOISTURE SENSITIVITY LEVEL (MSL) 1 (Unlimited) AECHANICAL LIFE - ANUFACTURER STANDARD LEAD TIME 14 Weeks EAD FREE STATUS / ROHS STATUS LEAD TIME 24 free / ROHS Compliant EAD FREE STATUS / ROHS STATUS - AURRESS PROTECTION - AURRESS PROTECTION - AURRENT RATING - AURRENT RATING 10.032" (0.81mm) AURRENT RATING SPDT	OPERATING POSITION	0.600" (15.2mm)
AOISTURE SENSITIVITY LEVEL (MSL) 1 (Unlimited) AECHANICAL LIFE ANUFACTURER STANDARD LEAD TIME 14 Weeks EAD FREE STATUS / ROHS STATUS 14 Weeks BAG FREE / ROHS Compliant AGRESS PROTECTION ALECTRICAL LIFE ALECTRICAL L	OPERATING FORCE	45gf
AANUFACTURER STANDARD LEAD TIME - 14 Weeks Lead free / RoHS Compliant Lead free / RoHS Compliant NGRESS PROTECTION Leatures Lectrical life Differential travel Liferential	MOUNTING TYPE	Chassis Mount
AANUFACTURER STANDARD LEAD TIME 14 Weeks EAD FREE STATUS / ROHS STATUS Lead free / ROHS Compliant NGRESS PROTECTION EATURES EATURE	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
EAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantNGRESS PROTECTION-EATURES-EATURES-ECTRICAL LIFE-DIFFERENTIAL TRAVEL0.032" (0.81mm)CURRENT RATINGHA (AC/DC)EATURESSPDT	MECHANICAL LIFE	-
NGRESS PROTECTION-EATURES-ALECTRICAL LIFE-DIFFERENTIAL TRAVEL0.032" (0.81mm)CURRENT RATING1A (AC/DC)CIRCUITSPDT	MANUFACTURER STANDARD LEAD TIME	14 Weeks
FEATURES-ELECTRICAL LIFE-DIFFERENTIAL TRAVEL0.032" (0.81mm)CURRENT RATING1A (AC/DC)CIRCUITSPDT	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ELECTRICAL LIFE-DIFFERENTIAL TRAVEL0.032" (0.81mm)CURRENT RATING1A (AC/DC)CIRCUITSPDT	INGRESS PROTECTION	-
DIFFERENTIAL TRAVEL0.032" (0.81mm)CURRENT RATING1A (AC/DC)CIRCUITSPDT	FEATURES	-
CURRENT RATING 1A (AC/DC)   CIRCUIT SPDT	ELECTRICAL LIFE	-
SIRCUIT SPDT	DIFFERENTIAL TRAVEL	0.032" (0.81mm)
	CURRENT RATING	1A (AC/DC)
CTUATOR TYPE Lever, Straight	CIRCUIT	SPDT
	ACTUATOR TYPE	Lever, Straight

# **Related Tags**

C&K TMCGF5ST1540C	TMCGF5ST1540C Distributor	TMCGF5ST1540C Supplier
TMCGF5ST1540C Price	TMCGF5ST1540C Pictures	TMCGF5ST1540C Image
TMCGF5ST1540C PDF Datasheet	TMCGF5ST1540C Download Datasheet	TMCGF5ST1540C Datasheet
TMCGF5ST1540C Stock	Buy TMCGF5ST1540C	Buy C&K TMCGF5ST1540C
C&K TMCGF5ST1540C	C&K Supplier	C&K Distributor
C&K TMCGF5ST1540C	C&K Components TMCGF5ST1540C	

# **Related Products**

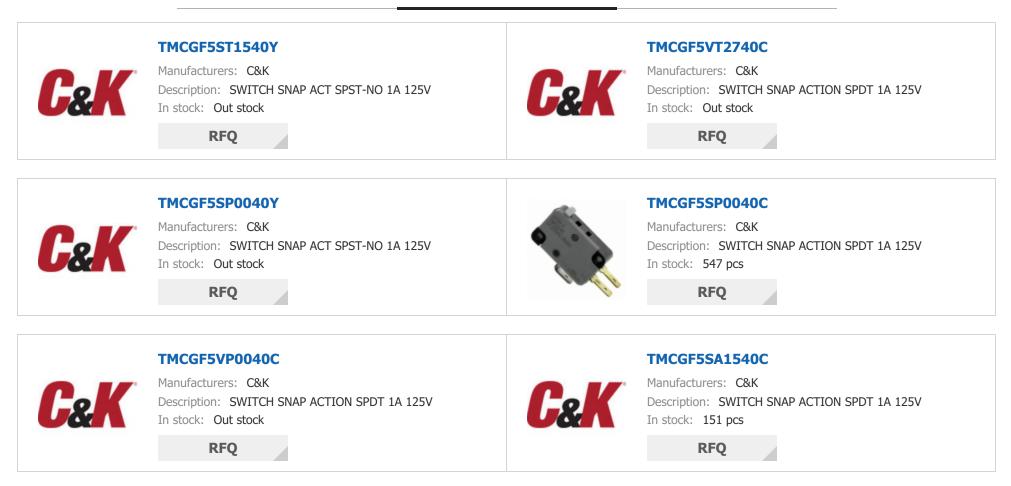



# TMCGF5SA2540C

Manufacturers: C&K Description: SWITCH SNAP ACTION SPDT 1A 125V In stock: Out stock



#### TMCGF5ST1040C

Manufacturers: C&K Description: SWITCH SNAP ACTION SPDT 1A 125V In stock: Out stock



RFQ

TMCGF5ST1740Y



RFQ

#### TMCGF5VT2440C



Manufacturers: C&K Description: SWITCH SNAP ACT SPST-NO 1A 125V In stock: Out stock

RFQ



Manufacturers: C&K Description: SWITCH SNAP ACTION SPDT 1A 125V In stock: Out stock

RFQ

### TMCGH3ST1640C



Manufacturers: C&K Description: SWITCH SNAP ACTION SPDT 1A 125V In stock: 30 pcs

RFQ

TMCGF5ST1440C



Manufacturers: C&K Description: SWITCH SNAP ACTION SPDT 5A 250V In stock: Out stock

RFQ

#### Copyright @ 2020 Reliable Distributor of Electronic Components - Ocean-Components.com

E-mail: Info@Ocean-Components.com

Address: Room 2102, Connaught Commercial Building, 185 Wan Chai Rd, Wan Chai, Hong Kong

