BB16AV-HC Details PDF





NKK Switches



BB16AV-HC

Part Number:
Manufacturer/Brand:
Product description
Datasheets:
RoHs Status
Ship From
Shipment Way

BB16AV-HC **NKK Switches** SWITCH PUSH SPDT 0.4VA 28V BB16AV-HC.pdf 💒 Lead free / RoHS Compliant Hong Kong DHL/Fedex/TNT/UPS/EMS

REQUEST FOR QUOTATION

.


Image may be representation. See specifications for product details.

PART NUMBERBBLGAV-HCNANUFACTURERNKK SwitchesDESCRIPTIONSWITCH PUSH SPID .VNA 28VLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDATA SHIETCeld Stack-HC.pdfVOLTAGE RATING - AC28VVOLTAGE RATING - AC28VVOLTAGE RATING - AC28VVOLTAGE RATING - AC8BSWITCH FUNCTIONOn-OnSERIESBBPAREL GUTOUT DIMENSIONS-PACAGINGToryOPERATING THMERSTURESOCO CyclesLIAD FREE STATUS / ROHS STATUSL(Valimited)NOTTING TYPE25,000 CyclesLIAD FREE STATUS / ROHS STATUS-LIAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantMODITING TYPE25,000 CyclesLIAD FREE STATUS / ROHS STATUS-LIAD FREE STATUS / ROHS STATUS-LIAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantLIAD FREE STATUS / ROHS STATUS-LIAD FREE STATUS / ROHS STATUS		Specifications of BB16AV-HC
MANUFACTURERNKK SkitchesDESCRIPTIONSWTCH PUSH SPDT 0.4VA 28VLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEETB1816AV-HC.pdfVOLTAGE RATING - DC28VVOLTAGE RATING - AC28VTYPEStandardTRYINATION STVLEPC PinSWITCH FUNCTIONOn-OnSERIESB8PAREL CUTOUT DIMENSIONS-PAREL CUTOUT DIMENSIONS-PAREL CUTOUT DIMENSIONS100°C v68°CMOUNTING TYPETravagh Hole, Right Angle, VerticalMOUNTING TYPE100°C v68°CMOUNTING TYPE100°C v68°CMOUNTING TYPE100°C v68°CLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantILLUMINATION VOLTAGE (MOMINAL)-LILUMINATION VOLTAGE (MOMINAL)-LILUMINATION VOLTAGE (MOMINAL)-LILUMINATION VOLTAGE (MOMINAL)5000 CyclesLECTRICL LIFE5,000 CyclesLECTRICL LIFE6,000 CyclesLILUMINATION VOLTAGE (MOMINAL)-LILUMINATION VOLTAGE (MOMINAL)-LILUMINATION VOLTAGE (MOMINAL)-CUTOR ÉSCRIPTION0.404 (AC/DC)CURRENT RATING0.404 (AC/DC)CURRENT RATING6.404 CAC/DCCURRENT RATING6.404 CAC/DCCURRENT RATING0.404 (AC/DC)CURRENT RATING6.404 CAC/DCCURRENT RATING6.404 CAC/DCCURRENT RATING6.404 CAC/DCCURRENT RATING CAPPRedCURRENT RATING CAPPFROME <td></td> <td></td>		
DeSCRIPTIONSWITCH PUSH SPOT 0.4VA 28VLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEETE BBISAV-HC.pdfVOLTAGE RATING - DC28VVOLTAGE RATING - AC28VTYPESendardTREMINATION STYLEPC PinSWITCH FUNCTIONOn-OnSERIESB8PARLE CUTOUT DIMENSIONS-PACKAGINGTrayOPERATING TARE- 85°CMOUTSTURE SENSTIVITY LEVEL (MSL)1 (Unlimited)MOUTSTURE SENSTIVITY LEVEL (MSL)1 (Unlimited)INCRESS RATUS / ROHS STATUSLead Free / RohS CompliantINCRESS RATUS / ROHS STATUSLead Free / RohS CompliantINCRESS RATUS / ROHS STATUSSetterILLUMINATION YUTAGE (MONINAL)-ILLUMINATION YUTAGE (MONINAL)-ELECTRICAL LIFE25,000 CyclesIECTRICAL LIFE25,000 CyclesIELCTRICAL LIFE25,000 CyclesIELCTRICAL LIFEAntistationELECTRICAL LIFE25,000 CyclesIELCTRICAL LIFE25,000 CyclesIELCTRICAL LIFE25,000 CyclesIELCTRICAL LIFE25,000 CyclesIELCTRICAL LIFEAntistationELECTRICAL LIFEAntistationELECTRICAL LIFEAntistationELECTRICAL LIFEAntistationCUCRE-ACTUATOR/CAPRedCUCRE-ACTUATOR/CAPRedCUCRE-ACTUATOR/CAPRedCUCRE-ACTUATOR/CAPSetterCUCRE-ACTUATOR/CAPSetterCUCRE-ACTUATOR/CAPSetterC	PART NUMBER	BB16AV-HC
LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEET© BB16AV+HC.pdfVOLTAGE RATING - DC28VVOLTAGE RATING - AC28VTYPEStandardTREMINATION STYLEPC PinSWITCH FUNCTIONOn-OnSERIESBBPAREL CUTOUT DIMENSIONS-PACKAGINGTaryOPERATING THEPRATURE-30°C + 85°CMOUNTING TYPEThrough Hole, Right Angle, VerticalMOUNTING TYPE25,000 CyclesLEAD FREE STATUS / ROHS STATUSLed free / ROHS CompliantINCRESS RATIGTION VOLTAGE (NOMINAL)-LEAD FREE STATUS / ROHS STATUSLed free / ROHS CompliantILUUMINATION TYPE, COLOR-LEAD FREE STATUS / ROHS STATUS-LEAD FREE STATUS / ROHS STATUS-LEULMINATION VOLTAGE (NOMINAL)-LEULMINATION TYPE, COLOR-ELECTRICAL LIFE25,000 CyclesDETAILED DESCRIPTIONPushbuton Switch SPDT Standard Through Hole, Right Angle, VerticalCURRENT RATING0.4VA (AC/DC)CURRENT RATING0.4VA (AC/DC)CUCR - ACTUATOR/CAPRedCURUTSPDT	MANUFACTURER	NKK Switches
DATA SHEETBBB6AV-HC.pdfVOLTAGE RATING - DC28VVOLTAGE RATING - AC28VTYPEStandardTRMINATION STYLEC PInSWITCH FUNCTIONOn-OnSKRIESBBPANEL CUTOUT DIMENSIONS-PACKAGINGTayOPERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPEThrough Hole, Right Angle, VerticalMOUNTING TYPE1 (Unlimited)MOSTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)ILLUMINATION YOFLEGION-ILLUMINATION TYPE, COLOR-ILLUMINATION T	DESCRIPTION	SWITCH PUSH SPDT 0.4VA 28V
VOLTAGE RATING - DCSWVOLTAGE RATING - ACSWTYPESandardTYPESandardTRMINATION STYLEPC PInSWITCH FUNCTIONOn-OnSRIESBBPANEL CUTOUT DIMENSIONS-PACKAGINGTrayOPERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPEThrough Hole, Right Angle, VerticalMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MICHANICAL LIFE25,000 CyclesLILUMINATION VOLTAGE (NOMINAL)-LILUMINATION TYPE, COLOR-FEATURESAntistaticLICTRICAL LIFE25,000 CyclesLILUMINATION TYPE, COLOR-FEATURESAntistaticLILUMINATION TYPE, COLOR-FEATURESAntistaticLICTRICAL LIFE25,000 CyclesLICTRICAL LIFE25,000 CyclesDETAILED DESCRIPTIONNusbutton Switch SPDT Standard Through Hole, Right Angle, VerticalCURRENT RATING0.4VA (AC/DC)CURRENT RATING6.4CICUCR - ACTUATOR/CAPRedCUCR - ACTUATOR/CAPRedCUCR - ACTUATOR/CAPSPDTCURCH - ACTUATOR - SPDTSPDTCURCH - ACTUATOR - SPDTSPDTCURCH - ACTUATOR - SPDTSPDTCURCH - ACTUATOR/CAPSPDT </td <td>LEAD FREE STATUS / ROHS STATUS</td> <td>Lead free / RoHS Compliant</td>	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
VolTAGE RATING - AC28VTYPESandardTREMINATION STYLEPC PinSWITCH FUNCTIONOn-OnSERIESBBPANEL CUTOUT DIMENSIONS-PACKAGINGTayOPERATING TEMPERATURE-30°C 85°CMOUTING TYPEThrough Hole, Right Angle, VerticalMOISTURE SENSITIVITY LEVEL (MSL)(Unlimited)IEGA FREE STATUS / ROHS STATUS-ILUMINATION VOLTAGE (NOMINAL)-ILUMINATION TYPE, COLOR-ILUMINATION TYPE, COLOR-ILUMINATION TYPE, COLOR-ILUMINATION TYPE, COLOR-IECTRICAL LIFES2,000 CyclesIECTRICAL LIFE-ILUMINATION TYPE, COLOR-ILUMINATION TYPE, COLOR-IELER STATUS / ROHS STATUS-IELER STATUS / ROHS STATUS-ILUMINATION TYPE, COLOR-ILUMINATION TYPE, COLOR-IELER STATUS / ROHS STATUS-IELER STATUS / ROHS STATUS-	DATA SHEET	BB16AV-HC.pdf
TYPESandardTREMINATION STYLEPC PinSWITCH FUNCTIONOn-OnSERIESBBPANLE CUTOUT DIMENSIONS-PACKAGINGTayOPERATING TEMPERATURE-30°C ~ 85°CMOUTSIT YFPThrough Hole, Right Angle, VerticalMOUTSITUR STENSTITUTY LEVEL (MSL)(Lulimited)REGARATURA (NOVINAL)-ILLMIINATION VOLTAGE (NOMINAL)-ILLMIINATION TYPE, COLOR-ILLMIINATION TYPE, COLOR-ILLM	VOLTAGE RATING - DC	28V
TERMINATION STYLEPC PinSWITCH FUNCTIONOn-OnSKRIESBBPANEL CUTOUT DIMENSIONS-PACKAGINGTrayOPERATING TEMPERATURE30°C % 8°CMOUNTING TYPEThrough Hole, Right Angle, VerticalMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MICHANICAL LIFE25,000 CyclesLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantILUMINATION YOPE, COLOR-FEATURESAnistaticILUMINATION TYPE, COLOR-FLEATURESAnistaticILUMINATION TYPE, COLOR25,000 CyclesLECTRICAL LIFE25,000 CyclesILUMINATION TYPE, COLOR-FEATURESAnistaticILUMINATION TYPE, COLOR-ILUMINATION TYPE, COLOR- <td>VOLTAGE RATING - AC</td> <td>28V</td>	VOLTAGE RATING - AC	28V
SWITCH FUNCTIONOn-OnSERIESBBPAREL CUTOUT DIMENSIONS-PACKAGINGTrayOPERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPEThrough Hole, Right Angle, VerticalMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MECHANICAL LIFE25,000 CyclesLEAD FREE STATUS / ROHS STATUS-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-FEATURESAntistatcILLUMINATION TYPE, COLOR-ELECTRICAL LIFE5,000 CyclesILLUMINATION TYPE, COLOR-FEATURESAntistatcICLUMINATION TYPE, COLOR-ILLUMINATION TYPE, COLOR-CUTRENT RATING0.404 (AC/DC)CURRENT RATINGRedCUOR - ACTUATOR/CAPRedCUCRC - ACTUATOR/CAPSPBT	TYPE	Standard
SERIESBBPANEL CUTOUT DIMENSIONS-PACKAGINGTrayOPERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPEThough Hole, Right Angle, VerticalMOUNTING TYPE(Iulimited)MOISTURE SENSITIVITY LEVEL (MSL)(Julimited)MECHANICAL LIFE5,000 CyclesILLMINATION VOLTAGE (NOMINAL)-FLATURESAndistacFLUMINATION TYPE, COLOR-ILLUMINATION TYPE, COLOR-FLETRICAL LIFE5,000 CyclesELECTRICAL LIFE6,000 CyclesELECTRICAL LIFE6,000 CyclesELECTRICAL LIFE6,000 CyclesCURRENT RATING0.4VA (AC/DC)CURRENT RATING6,4VA (AC/DC)CURRENT RATING6,4VA (AC/DC)CURRENT RATING6,000 CyclesCURRENT	TERMINATION STYLE	PC Pin
PANEL CUTOUT DIMENSIONS-PACKAGINGTrayOPERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPEThrough Hole, Right Angle, VerticalMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MECHANICAL LIFE25,000 CyclesLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantILLUMINATION VOLTAGE (NOMINAL)-FEATURESAntistaticELECTRICAL LIFE25,000 CyclesLILLUMINATION TYPE, COLOR-FEATURESAntistaticELECTRICAL LIFE25,000 CyclesELECTRICAL LIFE25,000 CyclesELECTRICAL LIFE0.4VA (AC/DC)CURRENT RATING0.4VA (AC/DC)CURRENT RATING0.4VA (AC/DC)CUOR - ACTUATOR/CAPRedCICULTSPDT	SWITCH FUNCTION	On-On
PACKAGINGTayOPERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPEThrough Hole, Right Angle, VerticalMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MECHANICAL LIFE25,000 CyclesLEAD FREE STATUS / ROHS STATUS-ILUMINATION VOLTAGE (NOMINAL)-ILUMINATION TYPE, COLOR-FEATURESAntistaticLECTRICAL LIFE2,000 CyclesCURRENT RATING-OD Cycles-CURRENT RATING-DETAILED DESCRIPTION-OLIVA CONCURATION-DETAILED DESCRIPTION-CURRENT RATING-CURRENT RATING- <td>SERIES</td> <td>BB</td>	SERIES	BB
OPERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPEThrough Hole, Right Angle, VerticalMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MECHANICAL LIFE25,000 CyclesLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantILUMINATION VOLTAGE (NOMINAL)-ILUMINATION TYPE, COLOR-FEATURESAntistaticELECTRICAL LIFE25,000 CyclesDETAILED DESCRIPTION-VURENT RATING-CURRENT RATING-OCYCles-DETAILED DESCRIPTIONPushbutton Switch SPDT Standard Through Hole, Right Angle, VerticalCURRENT RATING-COLOR - ACTUATOR/CAPRedSPDT-	PANEL CUTOUT DIMENSIONS	-
MOUNTING TYPEThough Hole, Right Angle, VerticalMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MECHANICAL LIFE5,000 CyclesLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-FEATURESAntistaticELECTRICAL LIFE5,000 CyclesDETAILED DESCRIPTIONOutyoutsOLTRENT RATING0.4VA (AC/DC)COLOR - ACTUATOR/CAPRedGUICHSPDT	PACKAGING	Tray
MOISTURE SENSITIVITY LEVEL (MSL)1 (Unimited)MECHANICAL LIFE25,000 CyclesLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-FEATURESAntistaticELECTRICAL LIFE25,000 CyclesDETAILED DESCRIPTION0.4VA (AC/DC)CURRENT RATING0.4VA (AC/DC)COLOR - ACTUATOR/CAPRedSPDTSPDT	OPERATING TEMPERATURE	-30°C ~ 85°C
MECHANICAL LIFE25,000 CyclesLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-FEATURESAntistaticELECTRICAL LIFE25,000 CyclesDETAILED DESCRIPTION-CURRENT RATING-COLOR - ACTUATOR/CAPRedSPDTSpDT	MOUNTING TYPE	Through Hole, Right Angle, Vertical
LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-FEATURESAntistaticFLECTRICAL LIFE25,000 CyclesDETAILED DESCRIPTION-CURRENT RATING-COLOR - ACTUATOR/CAPRedSPDSPD	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
INGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-FEATURESAntistaticELECTRICAL LIFE25,000 CyclesDETAILED DESCRIPTION-CURRENT RATING0.4VA (AC/DC)COLOR - ACTUATOR/CAPRedELECTUITSPDT	MECHANICAL LIFE	25,000 Cycles
ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-FEATURESAntistaticFEATURES25,000 CyclesDETAILED DESCRIPTION0.4VA (AC/DC)CURRENT RATING0.4VA (AC/DC)COLOR - ACTUATOR/CAPRedSPDTSPDT	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ILLUMINATION TYPE, COLOR-FEATURESAntistaticELECTRICAL LIFE25,000 CyclesDETAILED DESCRIPTIONPushbuton SWItch SPDT Standard Through Hole, Right Angle, VerticalCURRENT RATING0.4VA (AC/DC)Color - ACTUATOR/CAPRedSPDTSpot	INGRESS PROTECTION	-
FEATURESAntistaticELECTRICAL LIFE25,000 CyclesDETAILED DESCRIPTIONPushbutton SPDT Standard Through Hole, Right Angle, VerticalCURRENT RATING0.4VA (AC/DC)COLOR - ACTUATOR/CAPRedCIRCUITSPDT	ILLUMINATION VOLTAGE (NOMINAL)	-
ELECTRICAL LIFE 25,000 Cycles DETAILED DESCRIPTION Pushbutton Switch SPDT Standard Through Hole, Right Angle, Vertical CURRENT RATING 0.4VA (AC/DC) COLOR - ACTUATOR/CAP Red CIRCUIT SPDT	ILLUMINATION TYPE, COLOR	-
DETAILED DESCRIPTION Pushbutton Switch SPDT Standard Through Hole, Right Angle, Vertical CURRENT RATING 0.4VA (AC/DC) COLOR - ACTUATOR/CAP Red CIRCUIT SPDT	FEATURES	Antistatic
CURRENT RATING0.4VA (AC/DC)COLOR - ACTUATOR/CAPRedCIRCUITSPDT	ELECTRICAL LIFE	25,000 Cycles
COLOR - ACTUATOR/CAP Red CIRCUIT SPDT	DETAILED DESCRIPTION	Pushbutton Switch SPDT Standard Through Hole, Right Angle, Vertical
CIRCUIT SPDT	CURRENT RATING	0.4VA (AC/DC)
	COLOR - ACTUATOR/CAP	Red
ACTUATOR TYPE Round, Button	CIRCUIT	SPDT
	ACTUATOR TYPE	Round, Button

Related Tags

NKK Switches BB16AV-HC	BB16AV-HC Distributor	BB16AV-HC Supplier
BB16AV-HC Price	BB16AV-HC Pictures	BB16AV-HC Image
BB16AV-HC PDF Datasheet	BB16AV-HC Download Datasheet	BB16AV-HC Datasheet
BB16AV-HC Stock	Buy BB16AV-HC	Buy NKK Switches BB16AV-HC
NKK Switches BB16AV-HC	NKK Switches Supplier	NKK Switches Distributor
NKK Switches BB16AV-HC		

Related Products

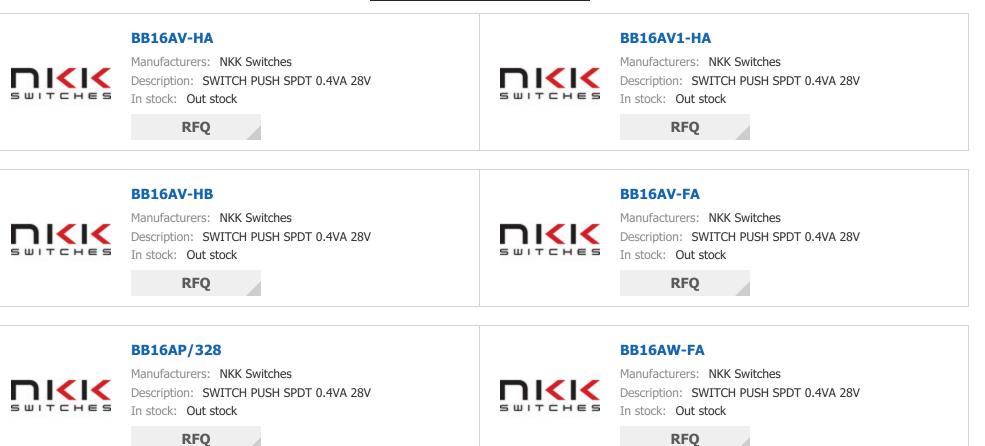

RFQ

BB16AP-HC



Manufacturers: NKK Switches Description: SWITCH PUSH SPDT 0.4VA 28V In stock: Out stock



BB16AW

Manufacturers: NKK Switches Description: SWITCH PUSH SPDT 0.4VA 28V In stock: Out stock

RFQ

BB16AV

BB17

TCHES Manufacturers: NKK Switches Description: SWITCH PUSH SPDT 0.4VA 28V In stock: Out stock

RFQ

BB170X

Manufacturers: NXP Semiconductors / Freescale Description: DIODE VHF VAR CAP 30V SOD323 In stock: Out stock

RFQ

Manufacturers: Hamlin / Littelfuse Description: BUSBAR TERMINAL POWER FEED LUG In stock: 1 pcs

RFQ



BB171X

Manufacturers: NXP Semiconductors / Freescale Description: DIODE VHF VAR CAP 32V SOD323 In stock: Out stock

RFQ

Copyright © 2020 Reliable Distributor of Electronic Components - Ocean-Components.com

E-mail: Info@Ocean-Components.com

Address: Room 2102, Connaught Commercial Building, 185 Wan Chai Rd, Wan Chai, Hong Kong

