
### D3V-6G4M-3A4-K Details PDF



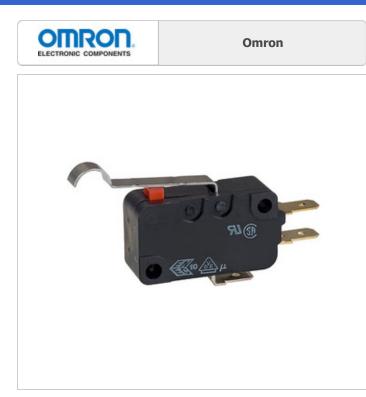

### D3V-6G4M-3A4-K

Part Number:	D3V-6G4M-3A4-K
Manufacturer/Brand:	Omron
Product description	SWITCH SNAP ACT SPST-NO 6A 250V
Datasheets:	D3V-6G4M-3A4-K.pdf
RoHs Status	Lead free / RoHS Compliant
Ship From	Hong Kong
Shipment Way	DHL/Fedex/TNT/UPS/EMS

**REQUEST FOR QUOTATION** 

Image may be representation. See specifications for product details.

ART NUMBER   D3V-6G4M-3A4-K     MANUFACTURER   Omron     VESCRIPTION   SWITCH SNAP ACT SPST-NO 6A 250V     EAD FREE STATUS / ROHS STATUS   Lead free / ROHS Compliant     VEAD FREE STATUS / ROHS STATUS   Lead free / ROHS Compliant     VOLTAGE RATING - DC   30V     VOLTAGE RATING - AC   250V     VOLTAGE RATING - AC   Solder, Quick Connect - 0.187" (4.7mm)     VELEASE FORCE   6.118gf     RETRAVEL   D3V-6G4M-3A4-K-ND     VELEASE FORCE   6.118gf     RETRAVEL   0.062" (1.6mm)     VERTRAVEL   0.062" (1.6mm)     D3V-6G4M-3A4-K-ND   D3V-6G4M-3A4-K-ND     D3V-6G4M-3A
AANUFACTUREROmronMANUFACTURERSWITCH SNAP ACT SPST-NO 6A 250VEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantEAD FREE STATUS / ROHS STATUSS03V-664M-3A4-K.pdfOLTAGE RATING - DC30VCOLTAGE RATING - ACSolder, Quick Connect - 0.187" (4.7mm)WITCH FUNCTIONOff-MomWITCH FUNCTIONGMWITCH FUNCTIONGMWITCH FUNCTIONSolder, Quick Connect - 0.187" (4.7mm)WITCH FUNCTIONSolder, Quick Connect - 0.187" (4.7mm)WITCH FUNCTIONGMKELEASE FORCE6.118gfRETRAVEL0.157" (4.0mm)ACKAGINGSolder, Quick Connect - 0.187" (3.0mm)WITCH RINAMESSolder, Quick Connect - 0.187" (3.0mm)DYPERATING FEMPERATURE-25°C ~ 105°COPERATING FORCEGofOPERATING FORCEGofACUNTING TYPEChasis MountADUTING TYPEIO00,000 CyclesADUTING TYPE10,000,000 Cycles
AANUFACTUREROmronMANUFACTURERSWITCH SNAP ACT SPST-NO 6A 250VEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantEAD FREE STATUS / ROHS STATUSS03V-664M-3A4-K.pdfOLTAGE RATING - DC30VCOLTAGE RATING - ACSolder, Quick Connect - 0.187" (4.7mm)WITCH FUNCTIONOff-MomWITCH FUNCTIONGMWITCH FUNCTIONGMWITCH FUNCTIONSolder, Quick Connect - 0.187" (4.7mm)WITCH FUNCTIONSolder, Quick Connect - 0.187" (4.7mm)WITCH FUNCTIONGMKELEASE FORCE6.118gfRETRAVEL0.157" (4.0mm)ACKAGINGSolder, Quick Connect - 0.187" (3.0mm)WITCH RINAMESSolder, Quick Connect - 0.187" (3.0mm)DYPERATING FEMPERATURE-25°C ~ 105°COPERATING FORCEGofOPERATING FORCEGofACUNTING TYPEChasis MountADUTING TYPEIO00,000 CyclesADUTING TYPE10,000,000 Cycles
RescriptionSWITCH SNAP ACT SPST-NO 6A 250VEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantATA SHEETD3V-6G4M-3A4-K.pdfOLTAGE RATING - DC30VCOLTAGE RATING - ACSolder, Quick Connect - 0.187" (4.7mm)OUTAGE RATING - ACSolder, Quick Connect - 0.187" (4.7mm)WITCH FUNCTIONOff-MomRERES03VRERES015" (4.0mm)RELEASE FORCE0.118gfACKAGINGNelVERTRAVEL0.602" (1.6mm)VERTRAVEL0.602" (1.6mm)VERTRAVEL0.62% - 0.05%COPERATING FORCE0.738" (18.7mm)OPERATING FORCE0.738" (18.7mm)OPERATING FORCE0.62% - 0.05%COPERATING FORCE0.62% - 0.05%COPERATING FORCE0.62% - 0.05%COUTINING TYPENot ApplicableACKANICAL LIFE0.00,000 CyclesACKANICAL LIFE0.00,000 Cycles
EAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantAATA SHEETD3V-6G4M-3A4-K.pdfROLTAGE RATING - DC30VCOLTAGE RATING - ACSolder, Quick Connect - 0.187" (4.7mm)RETRAINATION STYLESolder, Quick Connect - 0.187" (4.7mm)WITCH FUNCTIONOff-MomRETRAVELJ3VACKAGINGBulkVERTRAVEL0.62" (1.6mm)VERTRAVEL0.62" (1.6mm)VERTRAVEL0.62" (1.6mm)VERTRAVEL0.62" (1.6mm)VERTRAVEL0.57" (4.7mm)VERTRAVEL0.62" (1.6mm)VERTRAVEL0.62" (1.6mm)VERTRAVEL0.62" (1.6mm)VERTRAVEL0.62" (1.6mm)VERTRAVEL0.62" (1.6mm)VERTRAVEL0.62" (1.6mm)VERTRAVEL0.62" (1.6mm)VERTRAVEL0.61VERTRAVEL0.62" (1.6mm)VERTRAVEL0.62" (1.6mm)VERTRAVEL0.62" (1.6mm)VERTRAVEL0.62" (1.6mm)VERTRAVEL0.62" (1.6mm)VERTRAVEL0.73" (1.6mm)VERTRAVEL0.73" (1.6mm)VERTRAVEL0.73" (1.6mm)VERTRAVEL0.73" (1.6mm)VERTRAVEL0.61VERTRAVEL0.62" (1.6mm)VERTRAVEL0.73" (1.6mm)VERTRAVEL0.73" (1.6mm)VERTRAVELNOTAGEVERTRAVEL0.73" (1.6mm)VERTRAVEL0.74VERTRAVEL0.74VERTRAVEL0.74VERTRAVEL0.74VERTRAVEL0.74VERTR
AATA SHEET © D3V-6G4M-3A4-K.pdf NOLTAGE RATING - DC 30V COLTAGE RATING - AC 30V COLTAGE RATING - AC 300 COLTAGE RATIN
Parting - DC     30V       POLTAGE RATING - AC     250V       REMINATION STYLE     Solder, Quick Connect - 0.187" (4.7mm)       WITCH FUNCTION     Off-Mom       WITCH FUNCTION     D3V       RETERS     D3V       RETERS     D118gf       RETRAVEL     0.157" (4.0mm)       PACKAGING     D062" (1.6mm)       VERTRAVEL     0.062" (1.6mm)       VERTRAVEL     0.062" (1.6mm)       VERTRAVEL     S0%G4M-3A4-K-ND       VERTRAVEL     0.062" (1.6mm)       VERTRAVEL     0.738" (18.7mm)       VERTRAVEL     0.738" (18.7mm)       VERTRAVEL     G0gf       VERTRAVEL     Chasis Mount       VERTRAVEL     NOT AGE       VERTRAVEL     NOT AGE       VERTRAVEL     MOLTAGE       VERTRAVEL     G050       VERTRAVEL     NOT AGE       VERTRAVEL     MOLTAGE       VERTRAVEL     NOT AGE       VERTRAVEL     MOLTAGE       VERTRAVEL     MOLTAGE       VERTRAVEL     MOLTAGE       VERTRAVEL </td
ACITAGE RATING - AC250VERMINATION STYLESolder, Quick Connect - 0.187" (4.7mm)WITCH FUNCTIONOff-MomWITCH FUNCTIOND3VEREISD3VRETRAYEL0.118gfACKAGINGBulkVERTRAVEL0.62" (1.6mm)VERTRAYEL33V-664M-3A4-K-ND SubschaftschaftPREATING FORCE0.738" (18.7mm)OPERATING FORCE0.738" (18.7mm)OUNTING TYPEChasis MountIOLISTING FORCENot ApplicableIOLISTING FORCE0.000,000 cyclesIACHANICAL LIFE0.000,000 cyclesIANDEAD LEAD TIMEBURNEN
ERMINATION STYLESolder, Quick Connect - 0.187" (4.7mm)WITCH FUNCTIONOff-MomWITCH FUNCTIOND3VRELEASE FORCE6.118gfRELEASE FORCE0.157" (4.0mm)WACKAGINGBulkVACKAGING0.062" (1.6mm)VERTRAVEL0.062" (1.6mm)VERTRAVEL0.062" (1.6mm)VPERATING FORCE0.738" (18.7mm)VPERATING FORCE0.0738" (18.7mm)VIDUNTING TYPEChasis MountVIDUNTING TYPENC ApplicableVICHANICAL LIFE10.000,000 CyclesVIDUNTING TYPE10.000,000 Cycles
WITCH FUNCTION     Off-Mom       RETRAYE     D3V       RETRAYEL     6.118gf       RETRAYEL     0.157" (4.0mm)       ACKAGING     Bulk       ACKAGING     0.062" (1.6mm)       ACKAGING     0.062" (1.6mm)       APPERATING TEMPERATURE     25°C ~ 105°C       APPERATING POSITION     0.738" (18.7mm)       APPERATING FORCE     60f       APPERATING FORCE     60f       APPERATING FORCE     MOLANDEL       APPERATING FORCE     MOLANDEL       APPERATING FORCE     10000 (2005)       APPERATING FORCE     10,000,000 Cycles       APPERATING TEMPERATURE     10,000,000 Cycles
Ref ResDayRef Res6.118gfRef Ravel0.157" (4.0mm)Ref Ravel0.157" (4.0mm)Ackaging0.162" (1.6mm)Vert Ravel0.062" (1.6mm)Def Ravel0.062" (1.6mm)Def Ravel0.052" (1.6mm)Operating Forene-25° < 105°C
RELEASE FORCE6.118gfRETRAVEL0.157" (4.0mm)ACKAGINGBulkVERTRAVEL0.062" (1.6mm)VERTRAVEL0.062" (1.6mm)DTHER NAMESD3V-664M-3A4-K-ND D3V664M/3A4KDEPERATING TEMPERATURE-25°C ~ 105°COPERATING POSITION0.738" (18.7mm)OPERATING FORCE60gfIOUNTING TYPENot ApplicableIOISTURE SENSITIVITY LEVEL (MSL)Not ApplicableIAULFACTURER STANDARD LEAD TIME10,000,000 Cycles
RETRAVEL0.157" (4.0mm)ACKAGINGBulkVERTRAVEL0.062" (1.6mm)VERTRAVEL0.062" (1.6mm)DERATING TEMPERATURE33V-664M-3A4K-K-ND SV664M-3A4K-K-ND SV664M-3A4K-K-ND SV664M-3A4K SV664M-3A4K-K-ND SV664M-3AK-K-ND SV67A-1000 SV60A
ACKAGING Bulk DVERTRAVEL 0.062" (1.6mm) DVERTRAVEL 0.062" (1.6mm) DVERTRAVES DVEGAMASA4K SND DVEGAMASA4K SND DVERATING FOREATURE 0.25°C ~ 105°C DVERATING FORCE 0.738" (18.7mm) DVERATING FORCE 0.061 DVERATING FORCE 0.061 DVERATING FORCE 0.078 DVERATING FORCE 0.078
AVERTRAVEL0.062" (1.6mm)DTHER NAMESD3V-6G4M-3A4-K-ND D3V6G4M3A4K 210983OPERATING TEMPERATURE-25°C ~ 105°COPERATING POSITION0.738" (18.7mm)OPERATING FORCE60gfOUNTING TYPEChassis MountOLOSTURE SENSITIVITY LEVEL (MSL)Not ApplicableMANUFACTURER STANDARD LEAD TIME18.Weeks
brerating temperature 25°C ~ 105°C Perating position 25°C ~ 105°C Perating position 25°C ~ 105°C Perating position 25°C ~ 105°C 100rting type 26°C ~ 105°C ~ 105°C 100°C ~ 105°C ~ 105°C ~ 105°C ~ 105°C ~ 105°C ~
DTHER NAMESD3V6G4M3A4K 210983DPERATING TEMPERATURE-25°C ~ 105°COPERATING POSITION0.738" (18.7mm)OPERATING FORCE60gfOUNTING TYPEChassis MountIOISTURE SENSITIVITY LEVEL (MSL)Not ApplicableIECHANICAL LIFE10,000,000 CyclesIANUFACTURER STANDARD LEAD TIME18 Weeks
DPERATING POSITION0.738" (18.7mm)OPERATING FORCE60gfIOUNTING TYPEChassis MountIOISTURE SENSITIVITY LEVEL (MSL)Not ApplicableIECHANICAL LIFE10,000,000 CyclesIANUFACTURER STANDARD LEAD TIME18 Weeks
OPERATING FORCE   60gf     IOUNTING TYPE   Chassis Mount     IOISTURE SENSITIVITY LEVEL (MSL)   Not Applicable     IECHANICAL LIFE   10,000,000 Cycles     IANUFACTURER STANDARD LEAD TIME   18 Weeks
IOUNTING TYPE   Chassis Mount     IOISTURE SENSITIVITY LEVEL (MSL)   Not Applicable     IECHANICAL LIFE   10,000,000 Cycles     IANUFACTURER STANDARD LEAD TIME   18 Weeks
Not Applicable   IECHANICAL LIFE 10,000,000 Cycles   IANUFACTURER STANDARD LEAD TIME 18 Weeks
IECHANICAL LIFE 10,000,000 Cycles   IANUFACTURER STANDARD LEAD TIME 18 Weeks
18 Weeks
EAD FREE STATUS / ROHS STATUS Lead free / RoHS Compliant
NGRESS PROTECTION IP40
EATURES -
ELECTRICAL LIFE 500,000 Cycles
DIFFERENTIAL TRAVEL 0.031" (0.8mm)
CURRENT RATING 6A (AC/DC)
SIRCUIT SPST-NO
ACTUATOR TYPE Lever, Simulated Roller

## **Related Tags**

Omron D3V-6G4M-3A4-K	D3V-6G4M-3A4-K Distributor	D3V-6G4M-3A4-K Supplier
D3V-6G4M-3A4-K Price	D3V-6G4M-3A4-K Pictures	D3V-6G4M-3A4-K Image
D3V-6G4M-3A4-K PDF Datasheet	D3V-6G4M-3A4-K Download Datasheet	D3V-6G4M-3A4-K Datasheet
D3V-6G4M-3A4-K Stock	Buy D3V-6G4M-3A4-K	Buy Omron D3V-6G4M-3A4-K
Omron D3V-6G4M-3A4-K	Omron Supplier	Omron Distributor
Omron D3V-6G4M-3A4-K	Omron Electronics Inc-IA Div D3V-6G4M-3A4-K	Omron Electronics Inc-EMC Div D3V-6G4M-3A4-K
Omron Electronics LLC D3V-6G4M-3A4-K		

# **Related Products**



#### D3V-6G5-1C24-K

Manufacturers: Omron Description: SWITCH SNAP ACTION SPDT 6A 250V In stock: Out stock



D3V-6G5M-1A3

Manufacturers: Omron Description: SWITCH SNAP ACTION SPDT 6A 250V In stock: Out stock

RFQ



### D3V-6G5-2A3

RFQ

Manufacturers: Omron Description: SWITCH SNAP ACT SPST-NC 6A 250V In stock: Out stock

RFQ



#### D3V-6G5-3C23

Manufacturers: Omron Description: SWITCH SNAP ACT SPST-NO 6A 250V In stock: Out stock

RFQ



## D3V-6G4M-2A4-K

Manufacturers: Omron Description: SWITCH SNAP ACT SPST-NC 6A 250V In stock: Out stock



### D3V-6G4M-3C24-K

Manufacturers: Omron Description: SWITCH SNAP ACT SPST-NO 6A 250V In stock: Out stock



RFQ



#### D3V-6G5M-1A4-K

RFQ

Manufacturers: Omron Description: SWITCH SNAP ACTION SPDT 6A 250V In stock: Out stock


RFQ



#### D3V-6G4M-2C24-K

Manufacturers: Omron Description: SWITCH SNAP ACT SPST-NC 6A 250V In stock: Out stock

RFQ

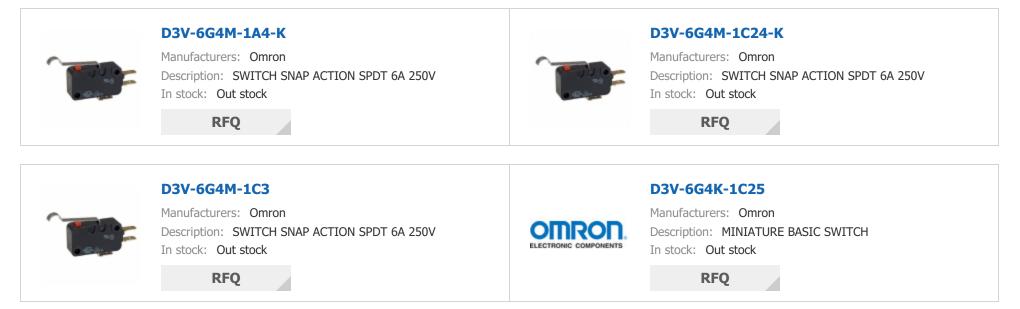

#### Copyright © 2020 Reliable Distributor of Electronic Components - Ocean-Components.com

E-mail: Info@Ocean-Components.com

Address: Room 2102, Connaught Commercial Building, 185 Wan Chai Rd, Wan Chai, Hong Kong

