#### TL36P000200 Details PDF





### TL36P000200

Part Number:	TL36P000200
Manufacturer/Brand:	APEM Inc.
Product description	SWITCH TOGGLE SPDT 0.4VA 20V
Datasheets:	TL36P000200.pdf
RoHs Status	Lead free / RoHS Compliant
Ship From	Hong Kong
Shipment Way	DHL/Fedex/TNT/UPS/EMS

#### **REQUEST FOR QUOTATION**


Image may be representation. See specifications for product details.

PART NUMBER     TIS6000200       PART NUMBER     TIS6000200       NANUVACIVER     APEM Inc.       DESCRIPTION     SUCTO TOGGEL SPDT 0.4VA 20V       LEAD FREE STATUS / ROHS STATUS     Lead free / RehS Compliant       DATA SHEET     STI 15600000.pdf       VOLTAGE RATING - OC     20V       VOLTAGE RATING - AC     20V       SWITCH FUNCTION     -       SWITCH FUNCTION     -       SWITCH FUNCTION     -       OPERATING TOPE     -       MOUTING TYPE     -       NOSTUME SENSITIVE LEVEL (MSL)     -       ILUMINATION VOLTAGE (MONTINAL)     -       ILUMINATION VOLTAGE (MONTINAL)     -       ILUMINATION VOLTAGE (MONTINAL)     -		
NNUFACTURERAPEM Inc.DESCRIPTIONSUTCH TOGALE SPOT 0.4XA 20VLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEETSTILS PRODUCTIONVOLTAGE RATING - DC2VVOLTAGE RATING - ACDVSUTCH FUNCTIONOn-OnSKITCH FUNCTIONPNI-SKITCH FUNCTIONOn-OnSERESTPACAGINGBuikOPERATING FUNCTION-00° ASS°CMOUTING TYPE-00° ASS°CMOUTING TYPEIndinitedINGERES STROTECTION-01° ASSINGRESS ROTECTION-01° ASSINGRESS ROTECTION-01° ASSILUMINATION TYPE, COLOR-01° ASSILUMINATION TYPE, COLOR-000 CyclesILUMINATION TYPE, COLOR-000 CyclesILUMINATION TYPE, COLOR-000 CyclesILUMINATION TYPE, COLOR-040 CyclesILUMINATION COLTAGE TYPE		Specifications of TL36P000200
NNUFACTURERAPEM Inc.DESCRIPTIONSUTCH TOGALE SPOT 0.4XA 20VLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEETSTILS PRODUCTIONVOLTAGE RATING - DC2VVOLTAGE RATING - ACDVSUTCH FUNCTIONOn-OnSKITCH FUNCTIONPNI-SKITCH FUNCTIONOn-OnSERESTPACAGINGBuikOPERATING FUNCTION-00° ASS°CMOUTING TYPE-00° ASS°CMOUTING TYPEIndinitedINGERES STROTECTION-01° ASSINGRESS ROTECTION-01° ASSINGRESS ROTECTION-01° ASSILUMINATION TYPE, COLOR-01° ASSILUMINATION TYPE, COLOR-000 CyclesILUMINATION TYPE, COLOR-000 CyclesILUMINATION TYPE, COLOR-000 CyclesILUMINATION TYPE, COLOR-040 CyclesILUMINATION COLTAGE TYPE		
DESCRIPTIONSUTCH TOGGLE SPOT 0.4V 20VLEAD FREE STATUS / ROHS STATUSLead fre/ ArkB CompliantDATA SHEETRef 1.36000.0pdfVOLTAGE RATING - DC2VVOLTAGE RATING - ACRVSTERNINATION STALER PinSUTCH FUNCTION0-OnSREESTPARCADOUT DIMENSIONS0-SCOPERATING TEMPERATURE0-SCOPERATING TEMPERATURE0-SCOPERATING TEMPERATURE0-SCMOUTING TEMPERATURE0-SCMOUTING TEMPERATURE0-SCILUMINATION TYPECad free / RoHS CompliantILUMINATION TYPE (COOR-ILUMINATION TYPE (COOR0-SCILUMINATION TYPE (COOR-ILUMINATION TYPE (COOR-ILUMINATION TYPE (COOR-ILUMINATION TYPE (COORSQNS SANG TEMORIANCILUMINATION TYPE (COOR<	PART NUMBER	TL36P000200
LAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantDATA SHEETGit JAP0000.pdfVOLTAGE RATING - DC2VVOLTAGE RATING - ACOVSTATUS - ACONOSWITCH FUNCTONOnOnSWITCH FUNCTONIPAREL CUTOUT DIMENSIONS-PACAGINGBukOPERATING FEMPERATURE-MOUNTING TYPE-MOUNTING TYPE-MOUNTING TYPE-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATINA <t< td=""><td>MANUFACTURER</td><td>APEM Inc.</td></t<>	MANUFACTURER	APEM Inc.
DATA SHEFTIntercentVOLTAGE RATING - DCXVVOLTAGE RATING - ACXVVOLTAGE RATING - ACXPTRININATION STYLEPOSWITCH FUNCTIONNO-ONSWITCH FUNCTIONNO-ONPARL CUTOUT DIMENSIONSNOPORAL CUTOUT DIMENSIONSNOOPERATING TEMPERATURESOC - SOCMOUNTING TYPENOB INFOMOUNTING TYPEInterfor ACC COMPILATIONNISTURE SENSITIVITY LEVEL (MSL)Interfor ACC COMPILATIONILLUMINATION YOLTAGE (MOMINAL)-ILLUMINATION YOLTAGE (MOMINAL)Interfor ACC COMPILATIONILLUMINATION YOLTAGE (MOMINAL)Interfor ACC COMPILATION	DESCRIPTION	SWITCH TOGGLE SPDT 0.4VA 20V
VICTAGE RATING - DC2VVICTAGE RATING - ACCPTERMINATION STYLECP (PASWITCH FUNCTIONOn-OnSRIESTuPANEL CUTOUT DIMENSIONS-PACKAGINGSMCOVERATING TEMPERATURE-SO°C ~ SO°CMOUNTING TYPEToogh HoleMOUNTING TYPEIde free / RAHS CompliantILIUMINATION VOLTAGE (NOMINAL)-ILIUMINATION TYPE, COLOR-ILIUMINATION TYPE, COLOR-ILIUMINATION TYPE, COLOR-ILIUMINATION TYPE, COLOR0.000 CyclesILIUMINATION TYPE, COLOR0.000 CyclesILIUMINATION TYPE, COLOR0.000 CyclesILIUMINATION TYPE, COLOR0.000 CyclesILIUMINATION0.000 CyclesILIUMINATION0.000 CyclesILIUMINATING0.000 CyclesILIUMINATING THREAD0.000 CyclesILIUMINATING THREAD0.000 CyclesILIUMINATING THREAD0.000 CyclesILIUMINATING THREAD0.000 CyclesILIUMINATING THREAD	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
VolTAGE RATING - AC20VTERMINATION STYLECPInSWITCH FUNCTIONOn-OnSERIESTPARLE QUITON DIMENSIONSRPARE GUTON DIMENSIONSSROPERATING TEMPERATURESNGMOUTING TYPECNGN BOAMOUTING STRUE SENSITIVT LEVEL (MSL)Icol RestINGRESS PROTECTION-ILUMINATION VOLTAGE (MOMINAL)-ILUMINATION TYPE, COLORGNG/GUEILUMINATION TYPE, COLOR-ILUMINATION TYPE, COLORGNG/GUEILUMINATION TYPE, COLORGNG/GUEILUMINATIONGUEILUMINATIONGUEILUMINATIONGUEILUMINATIONGUEILUMINATIONGUEILUMINATIONGUEILUMINATIONGUEILUMINATIONGUEILUMINATIONGUEILUMINATIONGUEILUMINATIONGUEILUMINAT	DATA SHEET	TL36P000200.pdf
TERMINATION STYLEPC PinSWITCH FUNCTIONGN-OnSERIESTPANEL CUTOUT DIMENSIONS-PACKAGINGBMOPERATING TEMPERATURESNCMOUNTING TYPECMOREDMOUNTING TYPECMOREDINGUSTURE SENSITIVIT LEVEL (MSL)CMINEDILGUINES SENSTICTION-ILGUININATION VOLTAGE (NOMINAL)-ILGUININATION TYPE, COLOR-ILGUININATION TYPE, COLOR-ILGUININATI	VOLTAGE RATING - DC	20V
SWITCH FUNCTIONon-OnSERTESTPANEL CUTOUT DIMENSIONS-PACKAGINGSRICPACKAGINGSICPORTATING TEMPERATURE-MOUNTING TYPETOOM PAGMOSTURE SENSITIVITY LEVEL (MSL)Icol free / Rolfs CompliantILCUMINATION VOLTAGE (NOMINAL)-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATION	VOLTAGE RATING - AC	20V
SERIESTLPAREL CUTOUT DIMENSIONS-PACKAGINGBIRPACKAGING-SOC GASCOPERATING TEMPERATURE-SOC GASCMOUNTING TYPE-InfundHOBMOSTURE SENSITIVITY LEVEL (MSL)Icol (MIRA)ILAD FREE STATUS / ROHS STATUS-Icol (MIRA)ILUMINATION YOLTAGE (NOMINAL)-Icol (MIRA)<	TERMINATION STYLE	PC Pin
PANEL CUTOUT DIMENSIONS-PACKAGINGBukOPERATING TEMPERATUREGO°C & SS°CMOUNTING TYPETrough HoleMOINTING TYPE(Unimited)ICAD FREE STATUS / ROHS STATUSEad free / RoHS CompliantILUMINATION YOLTAGE (NOMINAL)-ILUMINATION YOLTAGE (NOMINAL)-ILUMINATION YOPE, COLOR0ILUMINATION YOPE, COLORNon-IluminatedIRATURESBoy Seled TerminalsILUMINATION-ILUMINATION-ILUMINATION-IRATURESBoy Seled TerminalsILUMINATION-ICARENT RATING-ICARENT RATING-ISHING THREAD-ISHING THREAD<	SWITCH FUNCTION	On-On
PACKAGINGBukOPERATING TEMPERATURE-30°C ~ 85°CMOUNTNG TYPEThough HoleMOUNTNG TYPE(Inlimited)NOSTURE SENSITIVITY LEVEL (MSL)Lead free / RoHS CompliantLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATION TYPE, COLORNon-IlluminatedILLUMINATION TYPE, COLOR6000 CyclesIECTRICAL LIFE0,000 CyclesICRENT RATING-CARENT RATING0,000 CyclesILRUMINATION-CARENT RATING0,000 CyclesCARENT RATING0,000 Cycles <t< td=""><td>SERIES</td><td>TL</td></t<>	SERIES	TL
OPERATING TEMPERATURE-0°C * 8°CMOUNTING TYPEFinogh BoleMOSTURE SENSITIVIT LEVEL (MSL)(Ulninted)LEAD FREE STATUS / ROHS STATUSEad free / RoHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATION-FATURESBoys Geal TerminalsELCTRCAL LIFE-ICLRCAL LIFE-ICLRCAL LIFE-ICLRCAL TATING-CARENT ATING-CARENT ATING-	PANEL CUTOUT DIMENSIONS	-
MOUNTING TYPEHough HoleMOUNTING TYPEIduinitedMOUSTURE SENSITIVIT LEVEL (MSL)IduinitedLEAD FREE STATUS A ROHS SATUSEad free A ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOROn-IlluinitaddILLUMINATIONFAGUS COMPLICATIONFATURESForsolationIECTRICAL LIFEGolo CyclesICRUTI CALIFICSPGICRUTI CALIFICOn-IlluinitaddICRUTI CALIFICSPGICRUTI CALIFICSPGICRUTI CALIFICSPGICRUTI CALIFICSPGICRUTI CALIFICSINGH PAGLICRUTI CALIFICSING ROMCICRUTI CALIFICSING ROMCICRUTI CALIFICSING ROMCICRUTI CALIFICSING ROMCICRUTI CALIFICSING ROMCICRUTI CALIFICSING ROMCICRUTI CALIFICATIONSING ROMCICRUTI CA	PACKAGING	Bulk
MOISTURE SENSITIVITY LEVEL (MSL) Id Inimical Id Inimical Ide for A RAB Compliant Ida for A RAB Compliant Ingress PROTECTION Idumination VOLTAGE (MOMINAL) Idumination VOLTAGE (MOMINAL) Idumination VOLTAGE (MOMINAL) Idumination	OPERATING TEMPERATURE	-30°C ~ 85°C
LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOROn-IlluminatedILLUMINATIONNon-IlluminatedFATURESFoys Saled TerminalsELECTRICAL LIFE6000 CyclesDETAILED DESCRIPTIONOrge Switch SPDT Through HoleCIRRENT RATING9DTCIRRENT RATINGSPTBUSHING THREADMindeadACTUATOR TYPESmitch SPLACTUATOR TYPESmitch SPLACTUA	MOUNTING TYPE	Through Hole
INGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATIONNon-IlluminatedILLUMINATION-FATURESMonoleFATURES-ILLON LIFLE-OLOR COLOR-ILLUMINATION-ILLUMINATION-FATURES-FATURES-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION-ILLUMINATION <td< td=""><td>MOISTURE SENSITIVITY LEVEL (MSL)</td><td>1 (Unlimited)</td></td<>	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATION TYPE, COLORNon-IluminatedILLUMINATIONExposed TerminalsFATURES6,000 CyclesICECTRICAL LIFE0,000 CyclesICURRENT RATING0,404 CyclesCURRENT RATING9,000 CyclesCURRENT RATING0,404 CyclesSUBJING THREAD9,000 CyclesACTUATOR TYPE0,000 CyclesACTUATOR TYPE0,000 CyclesACTUATOR TYPESindra CyclesACTU	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ILLUMINATION TYPE, COLOR-ILLUMINATIONKon-IluminatedILLUMINATIONKon-IluminatedFEATURESFoxy Sealed TerminalsELECTRICAL LIFE6000 CyclesDETALED DESCRIPTIONTogle Switch SPDT Through HoleCURRENT RATING0.4VA (AC/DC)CIRCUTSDTBUSHING THREADUnthreadedACTUATOR TYPESindar RoundACTUATOR TYPESindar RoundACTUATOR MATERIALBisa, Nickel Pated	INGRESS PROTECTION	-
ILLUMINATIONNon-IlluminatedFEATURESFpoy Sealed TerminalsELECTRICAL LIFE6,000 CyclesDETAILED DESCRIPTIONTogle Switch SPDT Through HoleCURRENT RATING0.4VA (AC/DC)CIRCUITSPDTBUSHING THREADUnthreadedACTUATOR TYPEStandard RoundACTUATOR MATERIALSens, Nickel Pateled	ILLUMINATION VOLTAGE (NOMINAL)	-
FATURESFox Sealed TerminalsELECTRICAL LIFE6/00 CyclesDETAILED DESCRIPTIONTogle Switch SPDT Through HoleCURRENT RATING0.4/A (A/DC)CIRCUITSPTBUSHING THREADUntreadedACTUATOR TYPESandar ActuantsACTUATOR MATERIALBisa, Nickel Pateled	ILLUMINATION TYPE, COLOR	-
ELECTRICAL LIFE60,000 CyclesDETAILED DESCRIPTIONTogle Switch SPDT Through HoleCURRENT RATING0.4VA (AC/DC)CIRCUITSPDTBUSHING THREADUnthreadedACTUATOR TYPESanda RoundACTUATOR MATERIALBras, Nickel Plated	ILLUMINATION	Non-Illuminated
DETAILED DESCRIPTIONTogle Switch SPDT Through HoleCURRENT RATING0.4VA (AC/DC)CIRCUITSPDTBUSHING THREADUnthreadedACTUATOR TYPEStandar RoundACTUATOR MATERIALBras, Nickel Plated	FEATURES	Epoxy Sealed Terminals
CURRENT RATING0.4VA (AC/DC)CIRCUITSPDTBUSHING THREADUnthreadedACTUATOR TYPEStandard RoundACTUATOR MATERIALBrass, Nickel Plated	ELECTRICAL LIFE	60,000 Cycles
CIRCUITSPDTBUSHING THREADUnthreadedACTUATOR TYPEStandarGandardACTUATOR MATERIALBrass, Nickel Plated	DETAILED DESCRIPTION	Toggle Switch SPDT Through Hole
BUSHING THREAD   Unthreaded     ACTUATOR TYPE   Standard Round     ACTUATOR MATERIAL   Brass, Nickel Plated	CURRENT RATING	0.4VA (AC/DC)
ACTUATOR TYPE Standard Round   ACTUATOR MATERIAL Brass, Nickel Plated	CIRCUIT	SPDT
ACTUATOR MATERIAL Brass, Nickel Plated	BUSHING THREAD	Unthreaded
	ACTUATOR TYPE	Standard Round
ACTUATOR LENGTH 9.40mm	ACTUATOR MATERIAL	Brass, Nickel Plated
	ACTUATOR LENGTH	9.40mm

## **Related Tags**

APEM Inc. TL36P000200	TL36P000200 Distributor	TL36P000200 Supplier
TL36P000200 Price	TL36P000200 Pictures	TL36P000200 Image
TL36P000200 PDF Datasheet	TL36P000200 Download Datasheet	TL36P000200 Datasheet
TL36P000200 Stock	Buy TL36P000200	Buy APEM Inc. TL36P000200
APEM Inc. TL36P000200	APEM Inc. Supplier	APEM Inc. Distributor
APEM Inc. TL36P000200	APEM Components, LLC TL36P000200	APEM Components, LLC TL36P000200

# **Related Products**

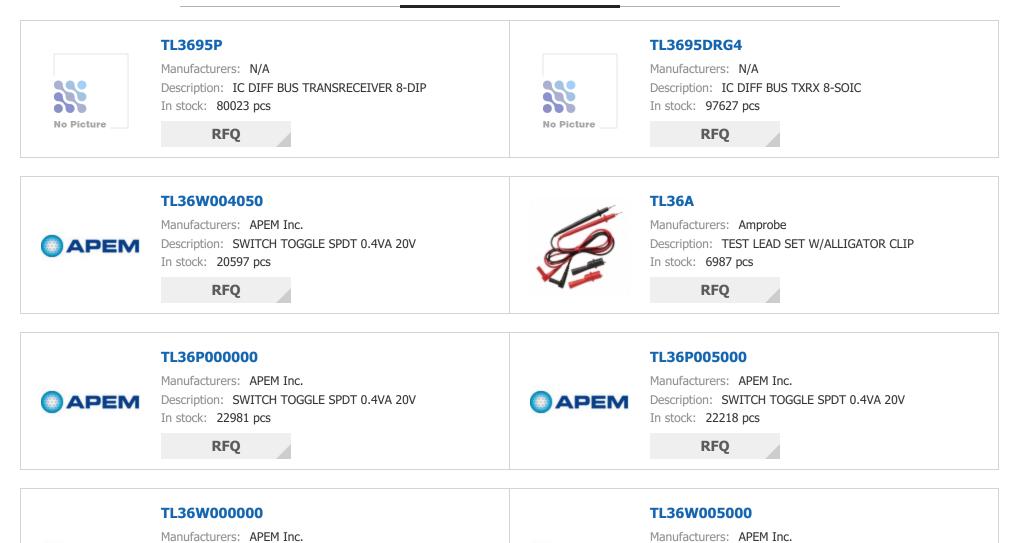

Manufacturers: APEM Inc. Description: SWITCH TOGGLE SPDT 0.4VA 20V In stock: 18964 pcs



Description: SWITCH TOGGLE SPDT 0.4VA 20V In stock: 19615 pcs

🔘 APEM

RFQ

	TL3695DR	TL36P019400
Manufacturers: N/A Description: IC DIFF BUS TXRX 8-SOIC In stock: 62534 pcs RFQ	Description: IC DIFF BUS TXRX 8-SOIC	Manufacturers: APEM Inc. Description: SWITCH TOGGLE SPDT 500MA 48V In stock: 15896 pcs
	RFQ	
	TL36W000050	TL3695PG4
-	Manufacturers: APEM Inc.	Manufacturers: N/A
	Manaractarers. Ar En Inc.	

RFQ

RFQ



In stock: 44963 pcs RFQ

Copyright @ 2020 Reliable Distributor of Electronic Components - Ocean-Components.com

E-mail: Info@Ocean-Components.com

Address: Room 2102, Connaught Commercial Building, 185 Wan Chai Rd, Wan Chai, Hong Kong

