
HS13Y-D Details PDF

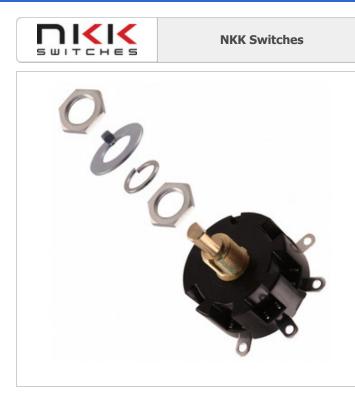

HS13Y-D

Part Number:
Manufacturer/Brand:
Product description
Datasheets:
RoHs Status
Ship From
Shipment Way

HS13Y-D NKK Switches SWITCH ROTARY 3POS 6A 125V HS13Y-D.pdf Lead free / RoHS Compliant Hong Kong DHL/Fedex/TNT/UPS/EMS

ocean-components.com

REQUEST FOR QUOTATION


Image may be representation. See specifications for product details.

Specifications of HS13Y-D KART NUMBER HS13Y-D MANUFACTURER NKK Switchss DESCRIPTION SWITCH ROTARY 3POS 6A 12SV LEAD FREE STATUS / ROHS STATUS Lead free / RoHS Compliant DATA SHET EHS13Y-D.pdf VOLTAGE RATING - DC 30V VOLTAGE RATING - DC 30V VOLTAGE RATING - DC 102V TERMINATION STULE Solder Lug SERIES HS PAREL CUTOUT DIMENSIONS Circular - 10.30mm Dia OTHER INAMES HS OPERATING FORCE 15 ~ 24g/m NUMBER OF POLIES PER DECK 1 NUMER OF POLIES PER DECK 1 NUMER OF POLIES PER DECK 1 NUMER OF POLIES PER DECK 1 DETATION CONSTON	MANUFACTURER DESCRIPTION LEAD FREE STATUS / ROHS STATUS	HS13Y-D NKK Switches SWITCH ROTARY 3POS 6A 125V Lead free / RoHS Compliant I S13Y-D.pdf
MANUFACTURERNKK SwitchesDESCRIPTIONSWITCH ROTARY JPOS 6A 125VLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEETSill ISJYD. GulfVOLTAGE RATING - DC30VVOLTAGE RATING - AC125VTERMINATION STYLESolder LugSERIESHSPANEL CUTOUT DIMENSIONSOctuar - 10.30mm DiaOFHER NAMES30VMUHBER OF FOSTIONS3NUMBER OF FOSTIONS3NUMBER OF FOSTIONS1NUMBER OF DELS FER DECX1NUMBER OF DELS STATUSKeeksLEAD FER STATUS / ROHS STATUS1ROBTURE STATUS / ROHS STATUS200mnLEAD FER STATUS / ROHS STATUS0.00mnCURRENT RATING0.00mnCURRENT RATING0.00mnCURRENT RATING0.00mnCURTACT TINING0.00Snetting (BBM)CONTACT TINING0.00Snetting (BBM)CONTACT TINING0.00Snetting (BBM)CONTACT TINING6.4(AC), 5A (DC)CONTACT TINING0.00TACCONTACT TINING0.00TACCONTACT TIN	MANUFACTURER DESCRIPTION LEAD FREE STATUS / ROHS STATUS	NKK Switches SWITCH ROTARY 3POS 6A 125V Lead free / RoHS Compliant Im HS13Y-D.pdf
MANUFACTURERNKK SwitchesDESCRIPTIONSWITCH ROTARY JPOS 6A 125VLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEETSill ISJYD. GulfVOLTAGE RATING - DC30VVOLTAGE RATING - AC125VTERMINATION STYLESolder LugSERIESHSPANEL CUTOUT DIMENSIONSOctuar - 10.30mm DiaOFHER NAMES30VMUHBER OF FOSTIONS3NUMBER OF FOSTIONS3NUMBER OF FOSTIONS1NUMBER OF DELS FER DECX1NUMBER OF DELS STATUSKeeksLEAD FER STATUS / ROHS STATUS1ROBTURE STATUS / ROHS STATUS200mnLEAD FER STATUS / ROHS STATUS0.00mnCURRENT RATING0.00mnCURRENT RATING0.00mnCURRENT RATING0.00mnCURTACT TINING0.00Snetting (BBM)CONTACT TINING0.00Snetting (BBM)CONTACT TINING0.00Snetting (BBM)CONTACT TINING6.4(AC), 5A (DC)CONTACT TINING0.00TACCONTACT TINING0.00TACCONTACT TIN	MANUFACTURER DESCRIPTION LEAD FREE STATUS / ROHS STATUS	NKK Switches SWITCH ROTARY 3POS 6A 125V Lead free / RoHS Compliant Im HS13Y-D.pdf
DESCRIPTIONSWITCH ROTARY JPOS 6A L2SVLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEETExil JPS13P-D.pdfVOLTAGE RATING - DC30VVOLTAGE RATING - AC12SVTERMINATION STVLESolder LugSERIESHSPANEL CUTOUT DIMENSIONSCircular - 0.30mm DiaOTHER NAMESSing Corcular - 0.30mm DiaOPERATING FORCE15 ~ 24gfmNUMBER OF POSITIONS3NUMBER OF POSITIONS1NUMBER OF POSITIONS2NUMBER OF POSITIONS2NOTTIONS1NUMDER OF POSITIONS2NUMDER OF POSITIONS2NUMDER OF POSITIONS2NUMDER OF POSITIONS2CORTACT	DESCRIPTION LEAD FREE STATUS / ROHS STATUS	SWITCH ROTARY 3POS 6A 125V Lead free / RoHS Compliant Tot HS13Y-D.pdf 30V
LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEETGIVVOLTAGE RATING - DC30VVOLTAGE RATING - AC12SVTERMINATION STYLESolder LugSRIESHSPAREL CUTOUT DIMENSIONSCircular - 10.30mm DiaOTHER NAMESCircular - 10.30mm DiaOTHER NAMES15 × 24gfmNUMBER OF POSITIONS3NUMBER OF POSITIONS1NUMBER OF POSITIONS1MOUTTING FORCE1 × 24gfmNUMBER OF POSITIONS1NUMBER OF POSITIONS1REAT RATINGCommEATURES-DETAILED DESCRIPTIONRead results POSITION POSITIONSDETAILED DESCRIPTIONRead results POSITION POSITIONSCURRENT RATING64 (AC), SA (IC)CURRENT RATING64 (AC), SA (IC)CURTACT TIMINGNon-Shortang (BM) <trr>CON</trr>	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant HS13Y-D.pdf 30V
Data SelectField Start DeptVoltrade RATING - DC30VVoltrade RATING - AC155VTermination StrueSolder LugSerelesHSPAREL CUTOUT DIMENSIONSGreatar - 10.30m DiaOff-RE NAMESSider JacobOff-RE NAMESSider JacobOff-RE NAMESSider JacobOFFARTING FORCE15 ~ 24gfmNUMBER OF POSITIONS3NUMBER OF POLES PER DECK1NUMBER OF DECKS1MUNFER OF DECKS1MUNFER STATUS / KOHS STATUS1 (Unlimited)MUNFER STATUS / KOHS STATUS1 (Unlimited)MUNFER STARDARD LEAD TIMES WeeksLEAD FREE STATUS / ROHS STATUS1 And Switch SPBT 66.(AC), 54 (CC) 125VAC Panel MountIDETALED DESCRIPTIONRokar Switch SPBT 66.(AC), 54 (CC) 125VAC Panel MountDETALED DESCRIPTIONA (AC), 50 (NC)CORMERT TIMINGNon-Shorting (BBM)CONTACT TIMINGNon-Shorting (BBM)CONTACT FINISH-CONTACT FINISHSPGTANGLE OF THROW85°ANGLE OF THROW45°ANGLE OF THROWFinited (Firm Dia)		HS13Y-D.pdf 30V
VOLTAGE RATING - DC30VVOLTAGE RATING - AC125VTERMINATION STYLESolder LugSERIESHSPANEL CUTOUT DIMENSIONSCircular - 10.30mm DiaOTHER NAMES3630-2350 NS13YD-RD NS13YD-RDOPERATING FORCE15 ~ 24gfmNUMBER OF POSITONS3NUMBER OF POLES PER DECK1NUMBER OF POLES PER DECK1NUMBER OF POLES PER DECK1MUNIFACTURER STANDARD LEAD TIME5 WeeksLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantINDEX STOPS-DETAILED DESCRIPTIONAcony Switch 3 Position SP3T 6A (AC), SA (DC), 125VAC Panel MountCURRENT RATING6 Acony Switch 3 Position SP3T 6A (AC), SA (DC), 125VAC Panel MountDETAILED DESCRIPTIONAcony Switch 3 Position SP3T 6A (AC), SA (DC), 125VAC Panel MountCURRENT RATING6 Acony Switch 3 Position SP3T 6A (AC), SA (DC), 125VAC Panel MountDETAILED DESCRIPTIONAcony Switch 3 Position SP3T 6A (AC), SA (DC), 125VAC Panel MountCURRENT RATING6 Acony Switch 3 Position SP3T 6A (AC), SA (DC), 125VAC Panel MountDETAILED DESCRIPTIONAcony Switch 3 Position SP3T 6A (AC), SA (DC), 125VAC Panel MountCURRENT RATING6 Acony Switch 3 Position SP3T 6A (AC), SA (DC), 125VAC Panel MountCURRENT RATING6 Acony Switch 3 Position SP3T 6A (AC), SA (DC), 125VAC Panel MountCURRENT RATING6 Acony Switch 3 Position SP3T 6A (AC), SA (DC), 125VAC Panel MountCURRENT RATING6 Acony Switch 3 Position SP3T 6A (AC), SA (DC), 125VAC Panel MountCUNTACT TIMING6 Acony Switch 3 Position S	DATA SHEET	30V
VCITAGE RATING - ACISVTERMINATION STYLESode LugSERIESHSPANEL CUTOUT DIMENSIONSGrolar - 10.30mm DiaOTHER NAMESGrolar - 10.30mm DiaOTHER NAMESGrolar - 10.30mm DiaOTHER NAMESIso - 24g/mNUMBER OF POSITIONS3NUMBER OF POSITIONS1NUMBER OF POSITIONS1MUNDER OF POLES PER DECK1MUNTING TYPEPanel MountMOUNTING TYPEPanel MountMOUNTING TYPEStweeksLEAD FRES STATUST LEVEL (MSL)1 (Unlimited)MAUFACTURER STANDARD LEAD TIME5 WeeksLEAD FRES STATUS / RONS STATUSLead free / APHS CompliantINDEX STOPSFixedFEATURES0.00mmCUTACT TIMING0.00mmCUTACT TIMINGACA(C), SA (CC)CUTACT TIMING-CONTACT TIMING-CONTACT TIMING-CUTACT TIMINGSP3TANGLE OF THROW45°ANGLE OF THROWFixed (Gimm Dia)ANDER OF THROWAS*ANDEL OF THROWAS*AND ANDERFIXED (Gimm Dia)CUTATAT TIMINGSP3TANDEL OF THROWAS*ANDEL OF THROWFIXED (Gimm Dia)		
TERMINATION STYLESolder LugSERIESHSPANEL CUTOUT DIMENSIONSCircular - 10.30m DiaOTHER NAMESS80-2350 hS13Y-DPAR HS13Y-DPAR HS13YDOPERATING FORCE15 ~ 249fmNUMBER OF POSITIONS3NUMBER OF POSITIONS1NUMBER OF POLES PER DECK1MUMBER OF DECKS1MUNDER OF DECKS1MUNDER OF DECKS1MUNDER OF DECKS1MUNDER OF DECKS1MUNDER SITUTY LEVEL (MSL)1 (Unlined)MUNDER STATUS FANDARD LEAD TIME5 WeeksLEAD FRES STATUS / ROHS STATUS1IDEE STATUS / ROHS STATUS2DEFATLED DESCRIPTIONRoary Switch 3 Position SP3T 6A (AC), SA (DC) 125VAC Panel MountDEFATLED DESCRIPTIONGA (AC), SA (DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT TIMING-CONTACT FINISH-CONTACT FINISH-ANGLE OF THROWSP3TANGLE OF THROWSP3TANGLE OF THROWAsterANGLE OF THROWHatel (Mem Dia)	VOLTAGE RATING - DC	125V
SERIESISPAREL CUTOUT DIMENSIONSCircular - 10.30mm DiaOrtHER NAMES360-2350 \$S13Y-DR SS13YDOPERATING FORCE15 ~ 24gfmNUMBER OF POSITIONS3NUMBER OF POLES PER DECK1NUMBER OF DECKS1NUMBER OF DECKS1MOUNTING TYPEPanel MountMOUNTING TYPE1 (Unlimited)MANUFACTURER STANDARD LEAD TIME5 WeeksLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantIDEX STOPSFixedPETALLED DESCRUPTIONAcAcy, Sak Dis SP3T 6A (AC), SA (DC) 125VAC Panel MountCUTRRENT RATING6A (AC), SA (DC)CUTART TATINGAcAC, SA (DC)CUTART TATINGMoshor BronzeCOTACT TIMINGFixedCOTACT FINISH-CUTARET RERIEMFIXELCOTACT FINISHSP3TCACUT FER DECKSP3TCACUT FER DECKSP3TCAUT DET DECKSP3TCAUT DET DET DET DET DET DET DET DET DET DE	VOLTAGE RATING - AC	
PAREL CUTOUT DIMENSIONSCircular - 10.30mm DiaOTHER NAMES360-2350 MS13YD-PAR MS13YD-PAR MS13YD-PAROPERATING FORCE15 ~ 24gfmNUMBER OF POSITIONS3NUMBER OF POLES PER DECK1NUMBER OF DOLES PER DECK1MUNTING TYPEPanel MountMOUNTING TYPE1 (Unlimited)MOUNTING TYPESWeeksLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantINDEX STOPSFixedPEATURES-DETAILED DESCRIPTIONRotary Switch 3 Position SP3T 6A (AC), 5A (DC) 125VAC Panel MountCUTRENT RATING6A (AC), 5A (DC)CUTACT TIMINGNon-Shorting (BBM)CONTACT TIMING-CONTACT FINISH-CONTACT FINISH-CONTACT FINISH-ANGLE OF THROW87ANGLE OF THROW85CUTUAT PTYEBated (Gmm Dia)	TERMINATION STYLE	Solder Lug
OTHER NAMES30°-2350 MS13'D'-DROOFERATING FORCE15 ~ 24gmNUMBER OF POSITIONS3NUMBER OF POLES PER DECK1NUMBER OF DOLES PER DECK1MOUNTING TYPEPanel MountMOUNTING TYPE101/Inited)MAUFACTURER STANDARD LEAD TIME5 WeeksLEAD FREE STATUS / ROHS STATUSCaffer / ROHSCOmpliantFRATURES-DETAILED DESCRIPTIONRoug Switch 3 Position SP3 GA (AC), SA (DC) 125VAC Panel MountDETH BEHIND PANEL-CORTACT TIMINGMONDROMECONTACT TIMING-CONTACT TIMING-CONTACT FINSH-CONTACT FINSH-CONTACT FINSH-CONTACT FINSH-CONTACT FINSH-CONTACT FINSH-CONTACT FINSH-CONTACT FINSH-CATACT FINSH- <td>SERIES</td> <td>HS</td>	SERIES	HS
DTHER NAMESShifty-p-RGOPERATING FORCE15 ~ 24g/mNUMBER OF POSITIONS3NUMBER OF POLES PER DECK1NUMBER OF POLES PER DECK1MOUTING TYPEPanel MountMOUTING TYPE1(Inimited)MOUTING TYPE1(Inimited)MAUFACTURER STANDARD LEAD TIME5 WeskLEAD FREE STATUS / ROHS STATUSIcaf ref / ROHSCOMplantFATURES-DETAILED DESCRIPTIONRotay Switch 3 Position SP3 GA (A), SA (DC) 125VAC Panel MountDETH BEHIND PANEL0(A), SA (DC)CORTACT TIMINGNonShorting (BBM)CONTACT TIMING-CORTACT FINSH-CORTACT FINSH-CARGUT PER DECK93TANGE OF THROW64G (Sma DE)CALCUT FINGSP3CALCUT FING-CALCUT FING- </td <td>PANEL CUTOUT DIMENSIONS</td> <td>Circular - 10.30mm Dia</td>	PANEL CUTOUT DIMENSIONS	Circular - 10.30mm Dia
NUMBER OF POSITIONS3NUMBER OF POLES PER DECK1NUMBER OF POLES PER DECK1NUMBER OF DECKS1MOUNTING TYPEPanel MountMOUNTING TYPE1 (Unlimited)MANUFACTURER STANDARD LEAD TIME5 WeeksLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantINDEX STOPSFixedPETAILED DESCRIPTION0 commDETAILED DESCRIPTIONA clary Switch 3 Position SP3T 6A (AC), 5A (DC) 125VAC Panel MountCURRENT RATING6 A(C), 5A (DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT FINISH-CONTACT FINISHSP3TANGLE OF THROWSP3TANGLE OF THROWSP3TANGLE OF THROWSP3TACTUATOR TYPEFatel (Ginn Dia)	OTHER NAMES	HS13Y-D-RO
NUMBER OF POLES PER DECK1NUMBER OF POLES PER DECK1NUMBER OF DECKSPanel MoutMOUNTING TYPEPanel MoutMOUNTING TYPE(Iulimited)MANUFACTURER STANDARD LEAD TIMES WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINDEX STOPSFixedFEATURES-DETAILED DESCRIPTIONRoary Switch J Postion SPAT 6A (AC), 5A (DC) 125VAC Panel MountCURRENT RATINGA(AC), 5A (DC)CURRENT RATINGNon-Shorting (BBM)CONTACT FINISH-CONTACT FINISH-CIRCUT PER DECKSPATANGLE OF THROWSPATANGLE OF THROWSPATANGLE OF THROWSPATANGLE OF THROWEdet (Gemn Dia)ANGLE OF THROWEdet (Gemn Dia)ANGLE OF THROWEdet (Gemn Dia)	OPERATING FORCE	15 ~ 24gfm
NUMBER OF DECKS1NUMBER OF DECKSPael MountMOUNTING TYPEPael MountMOSTURE SENSITIVIT LEVEL (MSL)I (Unimed)MANUFACTURER STANDARD LEAD TIMESeeksLEAD FREE STATUS / ROHS STATUSKad Free / RoHS CompliantINDEX STOPSFxedFATURES-DETAILED DESCRIPTIONAcid yeakid Application (SA) (SA) (SA) (SA) (SA) (SA) (SA) (SA)	NUMBER OF POSITIONS	3
MOUNTING TYPEPanel MountMOUNTING TYPEPanel MountMOUSTURE SENSITIVIT LEVEL (MSL)(Inlimited)MANUFACTURER STANDARD LEAD TIMESVeeksLEAD FREE STATUS / ROHS STATUSIcad free / ROHS CompliantINDEX STOPSFixedFATURES-DETAILED DESCRIPTIONRotary Switch 3 Position SP3T 6A (AC), SA (DC) 1.55VAC Panel MountDEPTH BEHIND PANEL0.00mmCONTACT TIMINGMoshoring (BBM)CONTACT TIMINGNoshoring (BBM)CONTACT FINISH.CONTACT FINISHSTANGLE OF THROWSP3ANGLE OF THROWBS4ANGLE OF THROWBS4ANGLE OF THROWBIEL (MENDEL)ANGLE OF THROWBIEL (MENDEL)	NUMBER OF POLES PER DECK	1
MOISTURE SENSITIVITY LEVEL (MSL)I (Unimited)MANUFACTURER STANDARD LEAD TIMES WeeksLEAD FREE STATUS / ROHS STATUSLed free / ROHS CompliantINDEX STOPSFixedFATURES-DETAILED DESCRIPTIONRotary Svitch 3 Pastion SP3T 6A (AC), 5A (DC) 125VAC Panel MountDEPTH BEHIND PANEL0.00mnCONTACT TIMINGNo-Shorting (BBM)CONTACT TIMING-CONTACT FINISH-CRUET PR ECKSTAANGLE OF THROWBSTANGLE OF THROWBSTANGLE OF THROWBSTANGLE OF THROWBSTANGLE OF THROWBIEL (GIME DIA)ANGLE OF THROWBIEL (GIME DIA)	NUMBER OF DECKS	1
MANUFACTURER STANDARD LEAD TIMESWeeksLAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINDEX STOPSFixelFATURES-DETAILED DESCRIPTIONRoary Switch 3 Postion SP3 GA (AC), 5A (DC) 125 VAC Panel MountDEPTH BEHIND PANEL0.00mmCURRENT RATING6A (AC), 5A (DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT FINISH-CONTACT FINISH93CIRCULT PE DECKSP3ANGLE OF THROWB4 (Gum Dia)ANGLE OF THROWB4 (Gum Dia)CURTOR TYPEBatter (Gum Dia)	MOUNTING TYPE	Panel Mount
Lead FREE STATUS / RCM STATUSLead FRE / RCM StatusINDEX STOPSFxAFATURES-DETALED DESCRIPTIONRoary Status Status StatusDEPTH BEHIND PANEL0.00mCURRENT RATINGA(AC) SA (DC)CONTACT TIMINGNo-Shoring (BBM)CONTACT FINISH-CONTACT FINISHSTANGLE OF THROWSTANGLE OF THROWSTANGLE OF THROWBAGANGLE OF THROW <t< td=""><td>MOISTURE SENSITIVITY LEVEL (MSL)</td><td>1 (Unlimited)</td></t<>	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
INDEX STOPSFixedFEATURES-DETAILED DESCRIPTIONRotary Switch 3 Position SP3T 6A (AC), 5A (DC) 125VAC Panel MountDEPTH BEHIND PANEL20.0mmCURRENT RATING6A (AC), 5A (DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT FINISH-CONTACT FINISH-CIRCUT PER DECKSP3TANGLE OF THROWFibed (Gum Dia)ATUATOR TYPEBited (Gum Dia)	MANUFACTURER STANDARD LEAD TIME	5 Weeks
FEATURES-DETAILED DESCRIPTIONRotay Switch 2 Postion SP3 CA (AC), 5A (DC) 125VAC Panel MountDEPTH BEHIND PANEL0.00mmCURRENT RATINGA(AC), 5A (DC)CONTACT TIMINGNon-Shoring (BBM)CONTACT FINISH-CONTACT FINISH-CIRCUIT PER DECKSP3ANGLE OF THROWStel (Gmm Dia)ATUATOR TYPEHatel (Gmm Dia)	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
DETAILED DESCRIPTIONRotary Switch 3 Position SP3T 6A (AC), 5A (DC) 125VAC Panel MountDEPTH BEHIND PANEL30.0mmCURRENT RATING6A (AC), 5A (DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT FINISHPhosphor BronzeCIRCUIT PER DECKSP3TAngle 0F THROWSed (Gmm Dia)ACUATOR TYPEBetter (Gmm Dia)	INDEX STOPS	Fixed
DEPTH BEHIND PANEL20.0mmCURRENT RATING6A (AC, 5A (DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT FINISHPhopher BranzeCONTACT FINISH-CIRCUIT PER DECKSP3ANGLE OF THROWFile (Bm Dia)ATUATOR TYPEBitel (Bm Dia)	FEATURES	-
CURRENT RATING6A (AC), 5A (DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT MATERIALPhosphor BronzeCONTACT FINISH-CRCUIT PER DECKSP3TANGLE OF THROWFlotd (Gmm Dia)ATUATOR TYPEFlotd (Gmm Dia)	DETAILED DESCRIPTION	Rotary Switch 3 Position SP3T 6A (AC), 5A (DC) 125VAC Panel Mount
CONTACT TIMINGNon-Shorting (BBM)CONTACT MATERIALPhosphor BronzeCONTACT FINISH-CRCUIT PER DECKSP3TANGLE OF THROW45°ACTUATOR TYPEFlated (form Dia)	DEPTH BEHIND PANEL	20.00mm
CONTACT MATERIALPhosphor BronzeCONTACT FINISH-CIRCUIT PER DECKSP3TANGLE OF THROW45°ACTUATOR TYPEFlated (form Dia)	CURRENT RATING	6A (AC), 5A (DC)
CONTACT FINISH - CIRCUIT PER DECK SP3T ANGLE OF THROW 45° ACTUATOR TYPE Flatted (6mm Dia)	CONTACT TIMING	Non-Shorting (BBM)
CIRCUIT PER DECKSP3TANGLE OF THROW45°ACTUATOR TYPEFlatted (6mm Dia)	CONTACT MATERIAL	Phosphor Bronze
ANGLE OF THROW 45° ACTUATOR TYPE Flatted (6mm Dia)	CONTACT FINISH	-
ACTUATOR TYPE Flatted (6mm Dia)	CIRCUIT PER DECK	SP3T
	ANGLE OF THROW	45°
	ACTUATOR TYPE	Flatted (6mm Dia)
ACTUATOR LENGTH 10.00mm	ACTUATOR LENGTH	10.00mm

Related Tags

NKK Switches HS13Y-D	HS13Y-D Distributor	HS13Y-D Supplier
HS13Y-D Price	HS13Y-D Pictures	HS13Y-D Image
HS13Y-D PDF Datasheet	HS13Y-D Download Datasheet	HS13Y-D Datasheet
HS13Y-D Stock	Buy HS13Y-D	Buy NKK Switches HS13Y-D
NKK Switches HS13Y-D	NKK Switches Supplier	NKK Switches Distributor
NKK Switches HS13Y-D		

Related Products

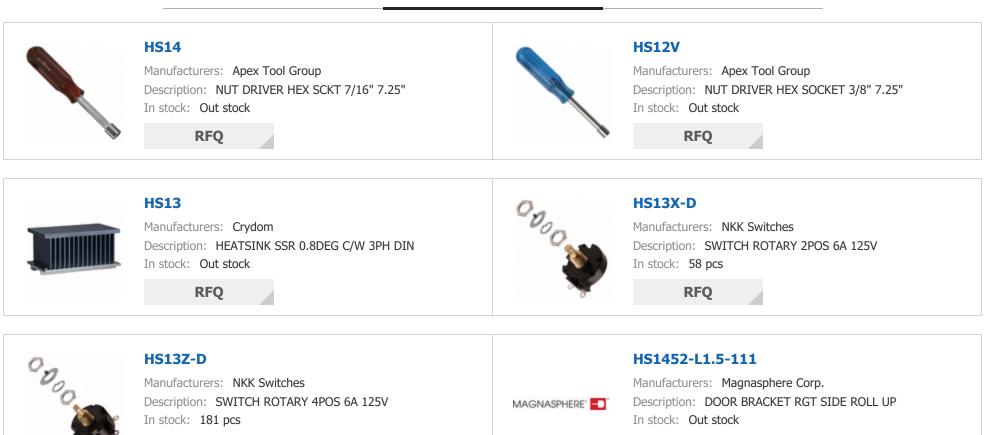

RFQ

HS14



Manufacturers: Apex Microtechnology Description: HEATSINK 8P TO-3 1.7C/W In stock: 67 pcs

RFQ


RFQ



HS13Y

Manufacturers: NKK Switches Description: SWITCH ROTARY 3POS 6A 125V In stock: 283 pcs

RFQ

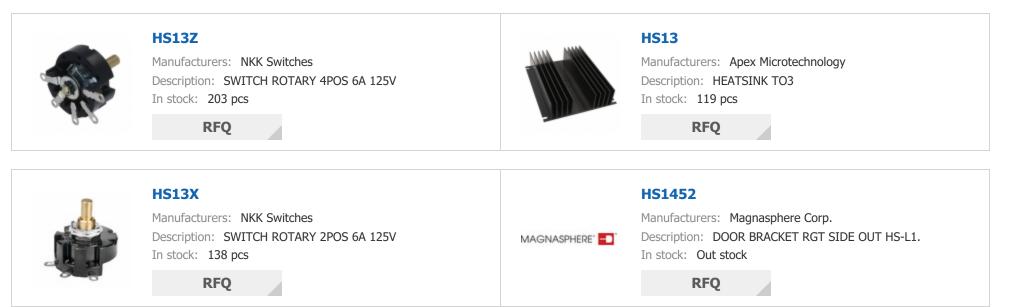

Copyright © 2020 Reliable Distributor of Electronic Components - Ocean-Components.com

E-mail: Info@Ocean-Components.com

Address: Room 2102, Connaught Commercial Building, 185 Wan Chai Rd, Wan Chai, Hong Kong

