SD07H0B Details PDF





Image may be representation. See specifications for product details.

SD07H0B

Part Number:
Manufacturer/Brand:
Product description
Datasheets:
RoHs Status
Ship From
Shipment Way

SD07H0B C&K SWITCH SLIDE DIP SPST 100MA 25V SD07H0B.pdf Lead free / RoHS Compliant Hong Kong DHL/Fedex/TNT/UPS/EMS


REQUEST FOR QUOTATION

Specifications of SD07H0B PART NUMBER SD07H0B MANUFACTURER CKK DESCRIPTION SWTCH SLIDE DP SPST 100M 25V LEDD FREE STATUS / ROHS STATUS Load free / RoHS Compliant. DATA SHEET St007H0B, pdf WASHABLE Ves OLTAGE RATING Yes OLTAGE RATING STATUS PC Pin SERLES SD PITCH 0.100° (2.54mm), Full PACAGENK Tube OTHER NAMES SON7H0B OTHER NAMES -40°C - 8°C OWINTION TYPE -40°C - 8°C NUMBER OF POSITIONS 7 OPECATIONE TOPERATURE -40°C - 8°C NUMBER OF POSITIONS 7 OUTING TYPE Tonga Hule MOUTING TYPE 2,000 Cycles MANUFACTURER STATUS / ROHS STATUS Load free / ROHS Compliant IERO FRACE STATUS / ROHS STATUS Load free / ROHS Compliant MOUTING TYPE 2,000 Cycles MANUFACTURER STATUS / ROHS STATUS Load free / ROHS Compliant IERO FRACE STATUS / ROHS STATUS Load free / ROHS		
MANUFACTURERCKKDESCRIPTIONSWTCH SLIDE DIP SPST 100MA 25VLEAD FREE STATUS / RCHS STATUSLead free / RoHS CompliantDATA SHEFTGr SD07H08.pdfWASHABLEYesVOLTAGE NATINGSVCCTERMINATION STYLEPC PinSRIFFSDo 0° (2.5Hmn), FullPACKAGINGTubeDTGH0.0° (2.5Hmn), FullPACKAGINGTubeOTHER NAMESSD07H08OTHER NAMESSD07H08OTHER NAMESYesOUTAGE SPRISTINTYLife (2.6 MG 22.6		Specifications of SD07H0B
MANUFACTURERCKKDESCRIPTIONSWTCH SLIDE DIP SPST 100MA 25VLEAD FREE STATUS / RCHS STATUSLead free / RoHS CompliantDATA SHEFTGr SD07H08.pdfWASHABLEYesVOLTAGE NATINGSVCCTERMINATION STYLEPC PinSRIFFSDo 0° (2.5Hmn), FullPACKAGINGTubeDTGH0.0° (2.5Hmn), FullPACKAGINGTubeOTHER NAMESSD07H08OTHER NAMESSD07H08OTHER NAMESYesOUTAGE SPRISTINTYLife (2.6 MG 22.6		
DescriptionSWITCH SLIDE DIP SPST 100MA 25VLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEETSOD7H08.pdfWASHABLEYasVILTAGE RATINGSVDCTERMINATION STYLEPC PinSERLESSDPITCHOLO' 0.2 Shrm), FullPACKAGINGTubeOHRER NAMESSOD7H08.pdfOHRER NAMESSOD7H08.pdfOHRER NAMESSDOY 0.5 SATUSOHRER NAMESSDOY 0.6 SATUSOHRER NAMESYasOHRER NAMESSOD7H08OHRER NAMESSOD7H08OHRER NAMESSOD7H08OHRER NAMESSDOY 0.6 SATUSNUMBER OF POSITIONS7MOUNTING TYPEInvoigh HoleMOUNTING TYPEJULINITIKHMOUNTING TYPESOD6 SATUSMOUNTING TYPESOM6 SATUSMOUNTING TYPEJULINITIKHMOUNTING TYPESOM6 SATUSMOUNTING TYPESOM6 SATUSMOUNTING TYPESOM6 SATUSMARIF SATUS / ROHS STATUSSATUS / SOM6 SATUSLEAD FREE STATUS / ROHS STATUSSATUS / SOM6 SATUSLEAD FREE STATUS / ROHS STATUSSATE / SOM6 SATUSELECTRICAL LIFEJOUNG / SOM6 SATUSELECTRICAL LIFESOM6 SATUSCURTACT MATINGGOMACURTACT MATERIALGOMACURTACT MATERIALSOM6CURTACT FINISHGoldCURTACT FINISHGoldGOUTACT FINISHGold SATUSGOUTACT FINISHGide SatusGOUTACT FINISHSide S	PART NUMBER	SD07H0B
LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEETVSVOLTAGE RATINGSVDCVOLTAGE RATINGPC PINSERIESSDPTCH0.00° (2.5Hm), FullPACKAGINGTUDCOTHER NAMESSVDC/YOHOBOTHER NAMES- MPC ~ 85°COTHER NAMES7MOUNTING TYPEMOV2 rokesMOUNTING TYPE2000 CyclesMOUNTING TYPE0.000 CyclesMAULPACTURER STANDARD LEAD TIME2000 CyclesLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantLEAD FREE STATUS / ROHS STATUS10% CyclesLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantCONTACT MARENAL	MANUFACTURER	C&K
DATA SHERTIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII	DESCRIPTION	SWITCH SLIDE DIP SPST 100MA 25V
WashABLEWaVOLTAGE RATINGSPDCTERMINATION STVLECP PnSERIESSDPITCH0.100° (2.54mm), FullPACKAGINGTuleOTHER NAMESSSOOP MOSOTHER NAMESSSOOP MOSOTHER NAMES- 40°C ~ 85°CNUMBER OF POSITIONS7MOUNTING TYPEInrough HoleMOUNTING TYPE100 (CyclesMOUNTING TYPE. 300 CyclesMAURACTURER STANDARD LEAD TIME. 308 (Sy 19.25 mm)LEAD FREE STATUS / CHORS STATUS. 640 free / RoHS CompliantLEAD RES STATUS / ROHS STATUS. 1078" (A S2mm)ELECTRICAL LIFE. 000 CyclesELECTRICAL LIFE. 000 CyclesELECTRICAL LIFE. 000 CyclesELECTRICAL LIFE. 018" (Samm)ELECTRICAL LIFE. 000 CyclesELECTRICAL LIFE. 000 CyclesCONTACT HINS. 000 CyclesCONTACT TINS. 000 CyclesCONTACT TINS. 000 CyclesCONTACT TINS. 000 CyclesCONTACT TINS. 000 CyclesCONTACT TINSH. 000 Cyc	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
VCITAGE RATINGSP/CTERMINATION STYLEC P/nSERIESS0PTCH0.10° (2.54mm, FullPACKAGINGTuleOTHER NAMES- S00° /H0BOTHER NAMES- S00° /H0BOPERATING TEMPERATURE- S0° CNUMBE OF POSITION7MOUNTING TYPE10/Infinited)MOUNTING TYPE10/Infinited)MOUNTING TYPE2,000 CyclesILEGAT ALL DES CATIONS13/86 (S2 mm)LEGAT RATUNS13/86 (S2 mm)LEGAT RATUNS10/Infinited)ILEGAT RATUNS10/Infinited)ILEGATING LIFEGOIILEGATING	DATA SHEET	DIF SD07H0B.pdf
TERNINATION STYLEPC PinSRIFESS0PTCH0.100 (2.54mm), FullPACKAGINGTubeOTHER NAMESS007H0BOPERATING TEMPERATURE-40°C × 85°CNUMBER OF POSITIONS7MOUNTING TYPEMough HoleMOUSTURE SENSTITUTY LEVEL (MSL)000 CyclesMAUFACTURER STANDARD LEAD TIME0.000 CyclesLEAD FREE STATUS / ROMS2.000 CyclesLEAD FREE STATUS / ROMS0.136° (1.25mm)LEGTRI ALL (LIFE0.000 CyclesLEAD FREE STATUS / ROMS0.136° (1.25mm)ELECTRI CAL LIFE0.000 CyclesELECTRI CAL LIFE0.000 CyclesCUTACE MARENT RATING0.000 CyclesELECTRI CAL LIFE0.000 CyclesELECTRI CAL LIFE0.000 CyclesELECTRI CAL LIFE0.000 CyclesCUTACE TATUS0.000 Cycles	WASHABLE	Yes
SPRESSDPTCH0.10° (2.54mm, FullPACKAGINGTueOTHER NAMESSD07H0BOTHER NAMES- 40° < 55°C	VOLTAGE RATING	25VDC
PTCH0.00° (2.54m), FullPACKAGINGKusOTHER NAMESSD07H0BOTHER NAMESSD07H0BOPERATING TEMPERATURE-0°C ~ SS°CNUMBER OF POSITIONS7MOUNTING TYPEThrough HoleMOUNTING TYPE(Milmed)MOUNTING TYPE200 CyclesMAUFACTURER STANDARD LEAD TIME30 CyclesLIGHT0.58° (1.52m)LIGHT ABOVE BOARD10° (4.52m)FEATURS200 CyclesELEGITAGUER300 CyclesELEGITAGUER300 CyclesELEGITAGUER200 CyclesELEGITAGUER300 CyclesELEGITAGUER300 CyclesELEGITAGUER300 CyclesCOTACT MATERIALGondCOTACT MATERIALGondCOTACT FINISHGalCOTACT FINISHGalCOTACT FINISHSFICOTACT FINISHSpothalmice (PPA)CAUTARTIALSpothalmice (PPA)CAUTARTIALSite (Standard) StatusCAUTARTIALSite (Standard) Status <t< td=""><td>TERMINATION STYLE</td><td>PC Pin</td></t<>	TERMINATION STYLE	PC Pin
PACKAGINGTubeOTHER NAMESSD07H0B SN06122OPERATING TEMPERATURE40°C ~ 85°CNUMBER OF POSITIONS7MOUNTING TYPETinoigh HoleMOUNTING TYPE(1/limited)MOLTIAE SENSITIVITY LEVEL (MSL)(1/limited)MAULFACTURER STANDARD LEAD TIME30°C velseLENGTHC35°C (1/limited)LENGTH05°C (1/limited)LENGTH05°C (1/limited)LEGHT ABOVE BOARD107°C (1/limited)FATURES100°C velseLEIGHT ABOVE BOARD017°C (1/limited)ELECTRICAL LIFE000°C velseELECTRICAL LIFE000°C velseELECTRICAL LIFE000°C velseELECTRICAL LIFE000°C velseCONTACT MATERIAL000°C velseCONTACT MATERIAL000°C velseCONTACT FINISHGoldCONTACT FINISHGoldCONTACT FINISHSPSTENDY MATERIALPolynthanide (PPA)CONTACT FYESide (2adard)	SERIES	SD
OTHER NAMES*SD07H0B CXN5122OPERATING TEMPERATURE-40°C ~ 85°CNUMBER OF POSITIONS7MOUNTING TYPEThrough HoleMOUNTING TYPE(Unlimited)MCHANICAL LIFE2,000 CyclesMANUFACTURER STANDARD LEAD TIME13 WeeksLENGTH0,758° (19.25mn)LEAD FREE STATUS / ROHS STATUSEdd free / RoHS CompliantHEIGHT ABOVE BOARD0,758° (19.25mn)ELEGTEAL LIFE2,000 CyclesELECTICAL LIFE0,000 CyclesDETAILED DESCRIPTIONDip Switch SPST 7 Position Through Hole Slide (Standard) Actuator 100mA 25VDCCUTRENT RATINGBeylium CopperCONTACT HINISHGoldCONTACT FINISHGoldCUTACT TINISHPSTFODY MATERIALPolynthalmide (PPA)CUTACT TYPESide (Standard)	PITCH	0.100" (2.54mm), Full
CITRER NAMESCKN6122OPERATING TEMPERATURE40°C ~ 85°CNUMBER OF POSITIONS7MOUNTING TYPEThrough HoleMOINTING TYPE(Ulimited)MANUFACTURE SENSITIVITY LEVEL (MSL)(Ulimited)MANUFACTURER STANDARD LEAD TIME3000 CyclesLENGTH0.55° (19.25mm)LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.178° (4.52mm)ELECTRICAL LIFE2,000 CyclesELECTRICAL LIFE0.000 CyclesELECTRICAL LIFE0.000 CyclesELECTRICAL LIFE0.000 CyclesELECTRICAL LIFE0.000 CyclesELECTRICAL LIFE0.000 CyclesCURRENT RATING0.000 CyclesCONTACT MATERIAL0.000 CyclesCONTACT FINISH0.000 CyclesCONTA	PACKAGING	Tube
NUMBER OF POSITIONS7MOUNTING TYPEThrough HoleMOINTING TYPE(Iulimited)MOISTURE SENSITIVITY LEVEL (MSL)(Iulimited)MECHANICAL LIFE2,000 CyclesMANUFACTURER STANDARD LEAD TIME13 WeeksLENGTH0,758" (19.25mm)LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantHEIGHT ABOVE BOARD0,178" (4.52mm)FEATURESTape SealELCTRICAL LIFE0,000 CyclesELCTRICAL LIFE000 CyclesCURRENT RATING100mACURRENT RATINGGoldCONTACT FINISHGoldCONTACT FINISHSPSTBODY MATERIALPolynthalmide (PPA)SUC MATERIALSide (Standard)KUTOR TYPESide (Standard)	OTHER NAMES	
MOUNTING TYPEInough HoleMOUNTING TYPEI/Unimited/HoleMOISTURE SENSITIVITY LEVEL (MSL)I/Unimited/HoleMECHANICAL LIFE2,000 CyclesMANUFACTURER STANDARD LEAD TIMEI/S8* (19.25mm)LENGTHCoffer / ROHS CompliantLEAD FREE STATUS / ROHS STATUSIcad free / ROHS CompliantHEIGHT ABOVE BOARD1,78* (4.52mm)ELCTRICAL LIFE2,000 CyclesELCTRICAL LIFE0,000 ACURRENT RATINGIomACURRENT RATINGGolCONTACT FINISHGolCONTACT FINISHGolCONTACT FINISHSpSTBODY MATERIALPolynthalmide (PPA)ACUTOR TYPESile (Standard)	OPERATING TEMPERATURE	-40°C ~ 85°C
MOISTURE SENSITIVITY LEVEL (MSL)I (Unlimited)MCHANICAL LIFE2,000 CyclesMANUFACTURER STANDARD LEAD TIME13 WeeksLENGTH0.758" (19.25mm)LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.178" (4.52mm)FEATURESTape SealELECTRICAL LIFE0.000 CyclesELECTRICAL LIFE0.000 CyclesCURRENT RATING0.000 ACURRENT RATING0.000 ACONTACT FINISHGoldCONTACT FINISHGoldREQUITISPSTFODY MATERIALPolyphtalamide (PPA)SIG (Standard)Side (Standard)ALTOR TYPESide (Standard)	NUMBER OF POSITIONS	7
MECHANICAL LIFE2,000 CyclesMANUFACTURER STANDARD LEAD TIME13 WeskLENGTH0.758" (19.25mm)LEAD FREE STATUS / ROHS STATUSLed free / ROHS CompliantHEIGHT ABOVE BOARD0.178" (4.52mm)FEATURESTape SealELECTRICAL LIFE2,000 CyclesDETAILED DESCRIPTIONDip Switch SPST 7 Position Through Hole Slide (Standard) Actuator 100mA 25VDCCONTACT MATERIALGoldCONTACT FINISHGoldCRCUTTSPSTFODY MATERIALPilpithalmide (PPA)Standard Standard)Side (Standard)KITATOR TYPESide (Standard)	MOUNTING TYPE	Through Hole
MANUFACTURER STANDARD LEAD TIME13 WeeksLENGTH0.758" (19.25mm)LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.178" (4.52mm)FEATURESTape SealELECTRICAL LIFE0.000 CyclesDETAILED DESCRIPTIONDip Switch SPST 7 Position Through Hole Slide (Standard) Actuator 100mA 25VDCCONTACT MATERIALBeryllium CopperCONTACT FINISHGoldCIRCUTTSPSTBODY MATERIALDip Shitch SPACSide (Standard) CYCPESide (Standard) CYCPE	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
LENGTH0.758" (19.25mm)LEAD FREE STATUS / ROHS STATUSLed free / ROHS CompliantHEIGHT ABOVE BOARD0.178" (4.52mm)FEATURES7ae SalELECTRICAL LIFE0.000 CyclesDETAILED DESCRIPTION0.000 Agroup / Sol Synth Storage /	MECHANICAL LIFE	2,000 Cycles
LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.178" (4.52mm)FEATURESTape SealELECTRICAL LIFE2,000 CyclesDETAILED DESCRIPTIONDip Switch SPST 7 Position Through Hole Slide (Standard) Actuator 100mA 25VDCCURRENT RATING100mACONTACT MATERIALBeryllium CopperCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALPolyphthalamide (PPA)ACTUATOR TYPESide (Standard)	MANUFACTURER STANDARD LEAD TIME	13 Weeks
HEIGHT ABOVE BOARD0.178" (4.52mm)FEATURESTape SealELECTRICAL LIFE0.000 CyclesDETAILED DESCRIPTIONDip Switch SPST 7 Position Through Hole Slide (Standard) Actuator 100mA 25VDCCURRENT RATING0.00mACONTACT MATERIALBerylium CopperCONTACT FINISHGoldGDDY MATERIALPolyphthalmide (PPA)BODY MATERIALSide (Standard)BODY MATERIALSide (Standard)BODY MATERIALSide (Standard)CONTACT TYPESide (Standard)	LENGTH	0.758" (19.25mm)
FEATURESTape SealELECTRICAL LIFE2,000 CyclesDETAILED DESCRIPTIONDip Switch SPST 7 Position Through Hole Slide (Standard) Actuator 100mA 25VDCCURRENT RATING100mACONTACT MATERIALBerylium CopperCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALPolyphtalamide (PPA)ACTUATOR TYPESide (Standard)	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ELECTRICAL LIFE2,000 CyclesDETAILED DESCRIPTIONDis Witch SPST 7 Position Through Hole Slide (Standard) Actuator 100mA 25VDCCURRENT RATING100mACONTACT MATERIALBerylium CopperCONTACT FINISHGoldCIRCUITSPSTFODY MATERIALPolyphthalamide (PAA)ACTUATOR TYPESile (Standard)	HEIGHT ABOVE BOARD	0.178" (4.52mm)
DETAILED DESCRIPTIONDip Switch SPST 7 Position Through Hole Slide (Standard) Actuator 100mA 25VDCCURRENT RATING100mACONTACT MATERIALBeryllium CopperCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALPolphthalmide (PPA)ACTUATOR TYPESile (Standard)	FEATURES	Tape Seal
CURRENT RATING100mACONTACT MATERIALBerylium CopperCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALPolyphtalamide (PPA)ACTUATOR TYPESile (Standard)	ELECTRICAL LIFE	2,000 Cycles
CONTACT MATERIALBeryllium CopperCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALPolyphthalamide (PPA)ACTUATOR TYPESide (Standard)	DETAILED DESCRIPTION	Dip Switch SPST 7 Position Through Hole Slide (Standard) Actuator 100mA 25VDC
CONTACT FINISHGoldCIRCUITSPSTBODY MATERIALPolyphthalamide (PPA)ACTUATOR TYPESide (Standard)	CURRENT RATING	100mA
CIRCUITSPSTBODY MATERIALPolyphthalamide (PPA)ACTUATOR TYPESlide (Standard)	CONTACT MATERIAL	Beryllium Copper
BODY MATERIAL Polyphthalamide (PPA) ACTUATOR TYPE Slide (Standard)	CONTACT FINISH	Gold
ACTUATOR TYPE Slide (Standard)	CIRCUIT	SPST
	BODY MATERIAL	Polyphthalamide (PPA)
	ACTUATOR TYPE	Slide (Standard)
ACTUATOR LEVEL FIUSH, RECESSED	ACTUATOR LEVEL	Flush, Recessed

Related Tags

C&K SD07H0B	SD07H0B Distributor	SD07H0B Supplier
SD07H0B Price	SD07H0B Pictures	SD07H0B Image
SD07H0B PDF Datasheet	SD07H0B Download Datasheet	SD07H0B Datasheet
SD07H0B Stock	Buy SD07H0B	Buy C&K SD07H0B
C&K SD07H0B	C&K Supplier	C&K Distributor
C&K SD07H0B	C&K Components SD07H0B	

Related Products

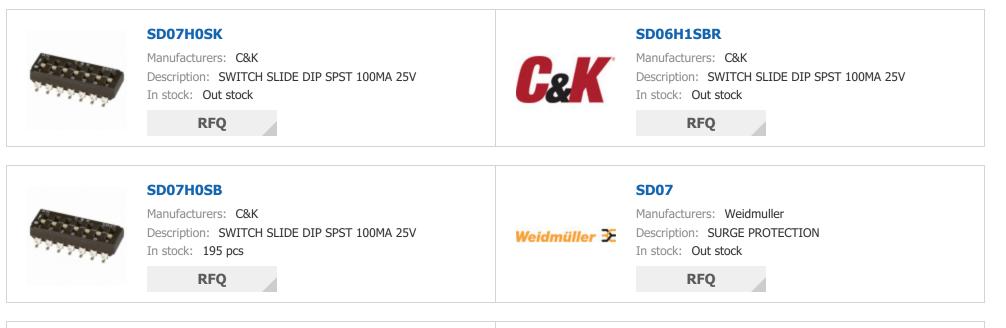



SD076-14-21-011

RFQ

Manufacturers: Advanced Photonix (Luna Optoelectronics) Description: PHOTODIODE HP 2.7X1.1MM TO-46 In stock: 53 pcs

SD07H0SBR



Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 100MA 25V In stock: Out stock

RFQ



SD07H1SB

Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 100MA 25V In stock: 137 pcs

RFQ

SD07H1SK



Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 100MA 25V In stock: Out stock

RFQ

SD06H1SB



Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 100MA 25V In stock: Out stock

RFQ




SD076-11-31-211

Manufacturers: Advanced Photonix (Luna Optoelectronics) Description: PHOTODIODE LOCAP 2.7X1.1MM TO-46 In stock: 414 pcs

RFQ

SD07H0K



SD072SC150A.T

Manufacturers: Sensitron Semiconductor / SMC Diode Solutions Description: DIODE SCHOTTKY 150V 5A DIE In stock: 100 pcs

RFQ



Manufacturers: C&K Description: SWITCH SLIDE DIP SPST 100MA 25V In stock: Out stock

RFQ

Copyright © 2020 Reliable Distributor of Electronic Components - Ocean-Components.com

E-mail: Info@Ocean-Components.com

Address: Room 2102, Connaught Commercial Building, 185 Wan Chai Rd, Wan Chai, Hong Kong

