
LP10A1AY Details PDF

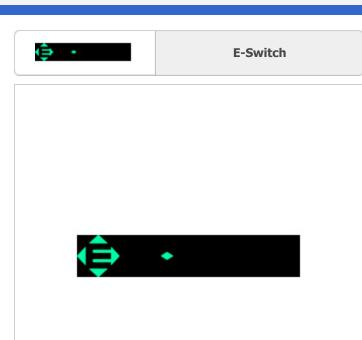

LP10A1AY

Part Number:	LP1OA1AY	
Manufacturer/Brand:	E-Switch	
Product description	SWITCH PUSH SPST-NO 0.1A 30V	
	I.LP1OA1AY.pdf	
Datasheets:	Def 2.LP1OA1AY.pdf	
RoHs Status	Lead free / RoHS Compliant	
Ship From	Hong Kong	
Shipment Way	DHL/Fedex/TNT/UPS/EMS	

REQUEST FOR QUOTATION

Image may be representation. See specifications for product details.

PART NUMBER LPLOALAY MANUFACTURER ESWICH DESCRIPTION SWITCH PUSH SPST-NO 0.1A 30V LEAD FREE STATUS / ROHS STATUS Lead free / RoHS Compliant DATA SHEET LEad free / RoHS Compliant OUTAGE RATING - DC 30V TYPE Standard, Illuminated SWITCH FUNCTION Offer A ROHS STATUS SWITCH FUNCTION Offer A ROHS Compliant SWITCH FUNCTION Offer A ROHS Compliant SWITCH FUNCTION Offer A ROHS Compliant PAREL CUTOUT DIMENSIONS Cincular - 8.00mm Dia PARKAGING Bulk OPERATING THEPE ATURE QS000 Cycles MOUNTING TYPE Panel Mount, Stap-In MOUNTING TYPE S0.000 Cycles MANUFACTURER STATUS / ROHS STATUS Lead free / RoHS Compliant INGERES STATUS / ROHS STATUS Lead free / ROHS Compliant INGERES STATUS / ROHS STATUS Lead free / ROHS Compliant INGERES STATUS / ROHS STATUS Lead free / ROHS Compliant INGERES STATUS / ROHS STATUS Lead free / ROHS Compliant INGERES STATUS / ROHS STATUS Lead free / ROHS Compliant <th></th> <th>Specifications of LP1OA1AY</th>		Specifications of LP1OA1AY
NANUFACTURERE-SwitchDESCRIPTIONSWITCH PUSH SPST-NO 0.1A 30VLEAD FREE STATUS / ROHS STATUSLead free / RaHS Complant.DATA SHEETLead free / RaHS Complant.VOLTAGE RATING - DC30VYPESandard, IlluminatedTERMINATION STYLESandard, IlluminatedSWITCH PURCTIONOff-MomSERIESLPIPAREL CUTOUT DIMENSIONSOff-MomSPAREL CUTOUT DIMENSIONSCircular - 8.00mm DiaPACKAGINGGS94358OPERATING THERE SENSITIVITY LEVEL (MSL)1 (Unlimed)MOUNTING THERE50,000 CyclesILLUMINATION VOLTAGE (MOMINAL)2.2 VDCILLUMINATION VOLTAGE (MOMINAL)2.2 VDCILLUMINATION VOLTAGE (MOMINAL)50,000 CyclesFEATURESS0,000 CyclesILLUMINATION TYPE, CLORS0,000 CyclesILLUMINATION TYPE, CLORLED, YEINS SENTING SENTING SENTINGICARENT RATINGLOMA (DC)CUCR - ACTUATORC/CAPClearCLORA - ACTUATORC/CAPClearCLORA - ACTUATORC/CAPClearCLORA - ACTUATORC/CAPClearCLORA - ACTUATORC/CAPClear <td></td> <td></td>		
DescriptionSWITCH PUSH SPST-NO 0.1A 30VLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantAnTA SHEETLi JEIOALXY.pdfVOLTAGE RATING - DC30VTYPEStandard, IlluminatedTREMINATION STYLESolder LugSWITCH FUNCTONOff-MomSKITCH FUNCTONGradiar - 8.00mm DiaPANEL CUTOUT DIMENSIONSGradiar - 8.00mm DiaPANEL CUTOUT DIMENSIONSGradiar - 8.00mm DiaPORCKGINGBulkOTHER NAMESGS99358OPEARTING TEMPERATURE40°C ~ 85°CMOUNTING TYPESol000 CyclesINAURACULERE STATUS / ROHS STATUSLead free / RoHS CompliantINGERESS PROTECTION1ILLUMINATION VOLTAGE (MOMINAL)2.2 VDCILLUMINATION VOLTAGE (MOMINAL)5.0000 CyclesIELECTRICAL LIFES0.000 CyclesIELECTRICAL LIFENOUND SWICK SPST-NO SLANDARD, LILIMINATON TYPE, COLORIELECTRICAL LIFES0.000 CyclesIELECTRICAL LIFES0.000 CyclesIELECTRICAL LIFES0.000 CyclesIELECTRICAL LIFES0.000 CyclesIELECTRICAL LIFES0.000 CyclesIELECTRICAL LIFE	PART NUMBER	LP1OA1AY
LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEET21.LPIOALAY.pdfVOLTAGE RATING - DC30VTYPEStandard, IlluminatedTERMINATION STYLESolder LugSWITCH FUNCTIONOff-MomSERIESLP1PACKAGINGGrouler - 8.00mm DiaPACKAGINGBulkOTHER NAMESQSS94358OPERATING TEMPERATURE40°C ~ 85°CMOUNTING TYPEPanel Mount, Snap-InMOUNTING TYPESoldo CyclesMANUFACTURER STANDARD LEAD TIME10.WecksLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantILLUMINATION VOLTAGE (NOMINAL)2.2 VCILLUMINATION VOLTAGE (NOMINAL)2.2 VCILLUMINATION VOLTAGE (NOMINAL)2.2 VCILLUMINATION VOLTAGE (NOMINAL)2.2 VCILLUMINATION VOLTAGE (NOMINAL)3.0000 CyclesILLUMINATION VOLTAGE (NOMINAL)2.2 VCILLUMINATION VOLTAGE (NOMINAL)2.2 VCILLUMINATION VOLTAGE (NOMINAL)2.2 VCILLUMINATION VOLTAGE (NOMINAL)3.0000 CyclesILLUMINATION VOLTAGE (NOMINAL)3.0000 CyclesILLUMINATION VOLTAGE (NOMINAL)2.2 VCILLUMINATION VOLTAGE (NOMINAL)3.0000 CyclesILLUMINATION VOLTAGE (NOMINAL)3.0000 Cycles </td <td>MANUFACTURER</td> <td>E-Switch</td>	MANUFACTURER	E-Switch
DATA SHEETDI LEPLOALAY, pdfVOLTAGE RATING - DC30VTYPESandard, JiluminatedTRMINATION STYLESolder LugSWITCH FUNCTIONOff-MomSREESLP1PABEL CUTOUT DIMENSIONSGrcular - 8.00mm DiaPAREL CUTOUT DIMENSIONSGrcular - 8.00mm DiaOHER NAMESQS894358OPERATING TEMPERATURE-40°C ~ 85°CMOUTING TYPEPanel Mount, Snap-InMOITING TYPESoldo CyclesMOUTING TYPESoldo CyclesILLUMINATION VOLTAGE (NOMINAL)2.2 VDCILLUMINATION TYPE, COLOREdD free / Rolls CompliantILLUMINATION TYPE, COLORLeD YellowFEATURESSoldo CyclesFEATURESSoldo CyclesFEATURESSoldo CyclesILLUMINATION TYPE, COLORLeD YellowFEATURESSoldo CyclesFEATURESSoldo CyclesFEATURESSoldo CyclesCUCRES TRATINGNeibutton Switch SPST-NO Standard, Illuminated Panel Mount, Snap-InGURRENT RATINGSoldo CyclesFEATURESSoldo CyclesFEATURESSoldo CyclesFEATURESSoldo CyclesFEATURESSoldo CyclesGURRENT RATINGJOBA (CC)CUCURE - ACTUATOR/CAPGearGURGUTTSPST-NOStandard, TILATORSPST-NO	DESCRIPTION	SWITCH PUSH SPST-NO 0.1A 30V
DATA SHEETCPUCITACE RATING - DCYOUTACE RATING - DC30VTYPEStandard, IlluminatedTERNINATION STYLESolder LugSWITCH FUNCTIONOff-MomSWITCH FUNCTIONUPSWITCH FUNCTIONCrular - 8.00mm DiaPAREL CUTOUT DIMENSIONSCirular - 8.00mm DiaPAREL CUTOUT DIMENSIONSCirular - 8.00mm DiaOTHERNATUREQS894358OTHERNATURE-40°C ~ 85°CMOUNTING TYPEPanel Mount, Snap-InMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MOUNTING TYPES0,000 CyclesILLUMINATION VOLTAGE (NOMINAL)2.2 VDCILLUMINATION VOLTAGE (NOMINAL)2.2 VDCILLUMINATION TYPE, COLOR-PEATURES-ELECTRICAL LIFES0,000 CyclesDETAILED DESCRIPTIONNushuton Switch SPST-NO Standard, Illuminated Panel Mount, Snap-InCUCRENT RATINGLOOM CyclesDETAILED DESCRIPTIONSoldon CyclesCUCRENT RATINGSOLDON CyclesDETAILED DESCRIPTIONSwitch SPST-NO Standard, Illuminated Panel Mount, Snap-InCUCRENT RATINGLOOR CyclesCUCRENT RATINGGearCUCRENT RATINGSPST-NOSPST-NOSPST-NO	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
TYPEStandard, IlluminatedTYPESolder LugSWITCH FUNCTIONOff-MomSERIESL9PANEL CUTOUT DIMENSIONSCircular - 8.00mm DiaPACKAGINGBulkOTHER NAMESQ5894358OPERATING TEMPERATURE-40°C ~ 85°CMOUNTING TYPEPanel Mount, Snap-InMOUNTING TYPES0,000 CyclesMANUFACTURER STANDARD LEAD TIME10 VeeksLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (MOMINAL)LED, YellowFLECTRICAL LIFES0,000 CyclesILLUMINATION TYPE, COLORLED, YellowFLECTRICAL LIFES0,000 CyclesILLUMINATION TYPE, COLORLED, YellowFLECTRICAL LIFES0,000 CyclesILLUMINATION TYPE, COLORLED, YellowFLECTRICAL LIFES0,000 CyclesCUCRE-NT RATINGOxodo CyclesFLECTRICAL LIFES0,000 CyclesFLECTRICAL LIFES0,000 CyclesCUCRE-NT RATINGNexIbutton Switch SPST-NO Standard, Illuminated Panel Mount, Snap-InCUCRE-NT RATINGS0000 CyclesFLECTRICAL LIFES0000 CyclesFLECTRICAL LIFES0000 CyclesCUCRE-NT RATINGNexIbutton Switch SPST-NO Standard, Illuminated Panel Mount, Snap-InCUCRE-NT CUTATOR/CAPGearCUCRE-NT ACTUATOR/CAPSPST-NOSCULUTSPST-NOSCULUTSPST-NO	DATA SHEET	
FERMINATION STYLESolder LugSWITCH FUNCTIONOff-MomSERIESLP1PANEL CUTOUT DIMENSIONSGrcular - 8.00mm DiaPACKAGINGBulkOTHER NAMESQS894358OPERATING TEMPERATURE-40°C ~ 85°CMOUNTING TYPEPanel Mount, Snap-InMOUNTING TYPEPanel Mount, Snap-InMOUNTING TYPE50,000 CyclesMANUFACTURER STANDARD LEAD TIME10 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILLUMINATION VOLTAGE (NOMINAL)2.2 VDCLILUMINATION TYPE, COLOR-ELECTRICAL LIFE50,000 CyclesFEATURES-CILUMINATION VOLTAGE (NOMINAL)2.2 VDCLILUMINATION VOLTAGE (NOMINAL)-ELECTRICAL LIFE50,000 CyclesFEATURES-CILCUTINOUSUCO Syntch SPST-NO Standard, Illuminated Panel Mount, Snap-InOURCAL LIFE0.000 CyclesCILCUTINO-ELECTRICAL LIFE0.000 CyclesCILCUTACAL LIFE0.000 Cycles <td>VOLTAGE RATING - DC</td> <td>30V</td>	VOLTAGE RATING - DC	30V
SWITCH FUNCTIONOff-MomSERIESLP1PANEL CUTOUT DIMENSIONSCircular - 8.00mm DiaPACKAGINGBulkOTHER NAMESOSB94358OPHER NAMES-40°C ~ 85°CMOUNTING TYPEPanel Mount, Snap-InMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MECHANICAL LIFE50,000 CyclesMANUFACTURER STANDARD LEAD TIME10 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILLUMINATION VOLTAGE (NOMINAL)2.2 VDCLILUMINATION TYPE, COLORED, YellowFEATURES-ELECTRICAL LIFE50,000 CyclesCILLUMINATION TYPE, COLORED, YellowCILLUMINATION VOLTAGE (NOMINAL)2.2 VDCELECTRICAL LIFE50,000 CyclesDETAILED DESCRIPTIONPushbutton Switch SPST-NO Standard, Illuminated Panel Mount, Snap-InCURRENT RATING100mA (DC)CURRENT RATINGGearCIRCUITSPST-NO	ТҮРЕ	Standard, Illuminated
SERIESLP1PANEL CUTOUT DIMENSIONSCircular - 8.00mm DiaPACEL CUTOUT DIMENSIONSGircular - 8.00mm DiaPACEL CUTOUT DIMENSIONSBulkCITHER NAMESQS894358OPERATING TEMPERATURE4.0°C ~ 85°CMOUNTING TYPEPanel Mount, Snap-InMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MECHANICAL LIFE50,000 CyclesMANUFACTURER STANDARD LEAD TIMEI WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILUMINATION VOLTAGE (NOMINAL)2.2 VDCILUMINATION VOLTAGE (NOMINAL)S0,000 CyclesFEATURESS0,000 CyclesILUMINATION TYPE, COLORLED, YellowPETATURESS0,000 CyclesCIECTRICAL LIFES0,000 CyclesDETAILED DESCRIPTIONPushbutton Switch SPST-NO Standard, Illuminated Panel Mount, Snap-InCURRENT RATINGComaCURRENT RATINGGearCURRENT RATINGSPST-NOCIRCULTSPST-NO	TERMINATION STYLE	Solder Lug
PANEL CUTOUT DIMENSIONSCircular - 8.00mm DiaPACKAGINGBulkPACKAGINGQ5894358OTHER NAMES-40°C ~ 85°CMOUNTING TEMPERATURE-40°C ~ 85°CMOUNTING TYPEPanel Mount, Snap-InMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MCHANICAL LIFE50,000 CyclesMANUFACTURER STANDARD LEAD TIME10 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILUMINATION VOLTAGE (NOMINAL)2.2 VDCILUMINATION VOLTAGE (NOMINAL)50,000 CyclesFEATURES-ELECTRICAL LIFE50,000 CyclesILUMINATION TYPE, COLORLED, YellowCIRCUETNon CyclesCIRCUET RATINS0.000 CyclesDETAILED DESCRIPTION-CURRENT RATINS100mA (DC)CURRENT RATINSClearCIRCUITSPST-NO	SWITCH FUNCTION	Off-Mom
PACKAGINGBulkOTHER NAMESQ5894358OPERATING TEMPERATURE40°C ~ 85°CMOUNTING TYPEPanel Mount, Snap-InMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MECHANICAL LIFES0,000 CyclesMANUFACTURER STANDARD LEAD TIME10 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILUMINATION VOLTAGE (NOMINAL)2.2 VDCILLUMINATION VOLTAGE (NOMINAL)5.000 CyclesFEATURES-FLECTRICAL LIFE50,000 CyclesILLUMINATION VOLTAGE (NOMINAL)2.2 VDCILLUMINATION TYPE, COLORLED, YellowFEATURES-CURRENT RATING0000 CyclesOCIOR - ACTUATOR/CAPL00mA (DC)CURRENT RATINGClearCURCUTSPST-NO	SERIES	LP1
OTHER NAMESQS894358OTHER NAMES-40°C ~ 8°CPOPERATING TEMPERATURE-40°C ~ 8°CMOUNTING TYPEPanel Mount, Snap-InMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MECHANICAL LIFE50,000 CyclesMANUFACTURER STANDARD LEAD TIME10 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-LLUMINATION VOLTAGE (NOMINAL)2.2 VDCLLUMINATION TYPE, COLORLED, YellowFEATURES-ELECTRICAL LIFE50,000 CyclesDETAILED DESCRIPTIONPushbutton Switch SPST-NO Standard, Illuminated Panel Mount, Snap-InCURRENT RATING100mA (DC)COLOR - ACTUATOR/CAPClearCIRCUITSPST-NO	PANEL CUTOUT DIMENSIONS	Circular - 8.00mm Dia
OPERATING TEMPERATURE-40°C ~ 85°CMOUNTING TYPEPanel Mount, Snap-InMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MECHANICAL LIFE50,000 CyclesMANUFACTURER STANDARD LEAD TIME10 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILLUMINATION VOLTAGE (NOMINAL)2.2 VDCILLUMINATION TYPE, COLORLED, YellowFEATURES50,000 CyclesDETAILED DESCRIPTIONPushbutton Switch SPST-NO Standard, Illuminated Panel Mount, Snap-InCURRENT RATINGClearCOLOR - ACTUATOR/CAPGlearCIRCUITSPST-NO	PACKAGING	Bulk
MOUNTING TYPEPanel Mount, Snap-InMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MECHANICAL LIFE50,000 CyclesMANUFACTURER STANDARD LEAD TIME10 WeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)2.2 VDCILLUMINATION TYPE, COLORLED, YellowFEATURES-DETAILED DESCRIPTION9.000 CyclesDETAILED DESCRIPTION100mA (DC)CURRENT RATING100mA (DC)COLOR - ACTUATOR/CAPSPST-NOEIRCHTSPST-NO	OTHER NAMES	Q5894358
MOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MCCHANICAL LIFE50,000 CyclesMANUFACTURER STANDARD LEAD TIME10 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)2.2 VDCILLUMINATION TYPE, COLORLED, YellowFEATURES-ELECTRICAL LIFE50,000 CyclesDETAILED DESCRIPTIONNushbutton Switch SPST-NO Standard, Illuminated Panel Mount, Snap-InCURRENT RATINGClearCOLOR - ACTUATOR/CAPSPST-NO	OPERATING TEMPERATURE	-40°C ~ 85°C
MECHANICAL LIFE50,000 CyclesMANUFACTURER STANDARD LEAD TIME10 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)2.2 VDCILLUMINATION TYPE, COLORLED, YellowFEATURES-IELECTRICAL LIFE50,000 CyclesDETAILED DESCRIPTIONNom A (DC)COLOR - ACTUATOR/CAPClearICRUITSPST-NO	MOUNTING TYPE	Panel Mount, Snap-In
MANUFACTURER STANDARD LEAD TIME10 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)2.2 VDCILLUMINATION TYPE, COLORLED, YellowFEATURES-ELECTRICAL LIFE50,000 CyclesDETAILED DESCRIPTIONNom (DC)COLOR - ACTUATOR/CAPGearICLUTISpST-NO	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
IEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)2.2 VDCILLUMINATION TYPE, COLORIED, YellowFEATURES-IECCTRICAL LIFE0,000 CyclesDETAILED DESCRIPTIONNushkith SPST-NO Standard, Illuminated Panel Mount, Snap-InCURRENT RATINGCleanCOLOR - ACTUATOR/CAPGeanCRCUITSPST-NO	MECHANICAL LIFE	50,000 Cycles
INGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)2.2 VDCILLUMINATION TYPE, COLORLED, YellowFEATURES-FEATURES50,000 CyclesDETAILED DESCRIPTIONPushbutton Syst-NO Standard, Illuminated Panel Mount, Snap-InCURRENT RATINGColon - ACTUATOR/CAPCICOR - ACTUATOR/CAPSpsT-NO	MANUFACTURER STANDARD LEAD TIME	10 Weeks
ILLUMINATION VOLTAGE (NOMINAL)2.2 VDCILLUMINATION TYPE, COLORLED, YellowFEATURES-FEATURES0,000 CyclesDETAILED DESCRIPTIONVoltand Switch SPST-NO Standard, Illuminated Panel Mount, Snap-InCURRENT RATINGCiona (Doma)COLOR - ACTUATOR/CAPCierCIRCUITSPST-NO	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ILLUMINATION TYPE, COLORLED, YellowFEATURES-FLECTRICAL LIFE50,000 CyclesDETAILED DESCRIPTIONPushbutton Systr-NO Standard, Illuminated Panel Mount, Snap-InCURRENT RATING100mA (DC)COLOR - ACTUATOR/CAPClearCIRCUITSpst-NO	INGRESS PROTECTION	-
FEATURES-ELECTRICAL LIFE50,000 CyclesDETAILED DESCRIPTIONPushbutton SPST-NO Standard, Illuminated Panel Mount, Snap-InCURRENT RATING100mA (DC)COLOR - ACTUATOR/CAPClearCIRCUITSPST-NO	ILLUMINATION VOLTAGE (NOMINAL)	2.2 VDC
ELECTRICAL LIFE50,000 CyclesDETAILED DESCRIPTIONPushbutton Switch SPST-NO Standard, Illuminated Panel Mount, Snap-InCURRENT RATING100mA (DC)COLOR - ACTUATOR/CAPClearCIRCUITSPST-NO	ILLUMINATION TYPE, COLOR	LED, Yellow
DETAILED DESCRIPTIONPushbutton Switch SPST-NO Standard, Illuminated Panel Mount, Snap-InCURRENT RATING100mA (DC)COLOR - ACTUATOR/CAPClearCIRCUITSPST-NO	FEATURES	-
CURRENT RATING100mA (DC)COLOR - ACTUATOR/CAPClearCIRCUITSPST-NO	ELECTRICAL LIFE	50,000 Cycles
COLOR - ACTUATOR/CAP Clear CIRCUIT SPST-NO	DETAILED DESCRIPTION	Pushbutton Switch SPST-NO Standard, Illuminated Panel Mount, Snap-In
CIRCUIT SPST-NO	CURRENT RATING	100mA (DC)
	COLOR - ACTUATOR/CAP	Clear
ACTUATOR TYPE Round, Button	CIRCUIT	SPST-NO
	ACTUATOR TYPE	Round, Button

Related Tags

E-Switch LP1OA1AY	LP1OA1AY Distributor	LP1OA1AY Supplier
LP10A1AY Price	LP1OA1AY Pictures	LP1OA1AY Image
LP10A1AY PDF Datasheet	LP1OA1AY Download Datasheet	LP1OA1AY Datasheet
LP1OA1AY Stock	Buy LP1OA1AY	Buy E-Switch LP1OA1AY
E-Switch LP1OA1AY	E-Switch Supplier	E-Switch Distributor
E-Switch LP1OA1AY		

Related Products

LP1S-16S-559-Z Manufacturers: Copal Electronics Description: SWITCH PUSHBUTTON SPDT 3A 125V In stock: 38 pcs RFQ		LP1OA1AG Manufacturers: E-Switch Description: SWITCH PUSH SPST-NO 0.1A 30V In stock: Out stock RFQ
LP1S-16G-559-Z Manufacturers: Copal Electronics Description: SWITCH PUSHBUTTON SPDT 50MA 48V In stock: Out stock RFQ	(€) +	LP1OA1AW Manufacturers: E-Switch Description: SWITCH PUSH SPST-NO 0.1A 30V In stock: Out stock RFQ
LP1OA1AB Manufacturers: E-Switch Description: SWITCH PUSH SPST-NO 0.1A 30V In stock: Out stock		LP1S-16S-509-Z Manufacturers: Copal Electronics Description: SWITCH PUSHBUTTON SPDT 3A 125V In stock: 173 pcs
 RFQ		RFQ



LP1S-16S-209-Z



LP19BF35IET

Manufacturers: Copal Electronics Description: SWITCH PUSHBUTTON SPDT 3A 125V In stock: 53 pcs

RFQ



Manufacturers: CTS Electronic Components Description: CRYSTAL 19.660800MHZ SMD In stock: Out stock

RFQ

LP19BF35IDT

LP10A1AR



LP1S-16S-809-Z

Manufacturers: Copal Electronics Description: SWITCH PUSHBUTTON SPDT 3A 125V In stock: 119 pcs





Manufacturers: CTS Electronic Components

Description: CRYSTAL 19.660800MHZ SMD In stock: Out stock

RFQ



LP1S-16G-229-Z

Manufacturers: Copal Electronics Description: SWITCH PUSHBUTTON SPDT 50MA 48V In stock: Out stock

RFQ



Manufacturers: E-Switch Description: SWITCH PUSH SPST-NO 0.1A 30V In stock: Out stock

RFQ

Copyright @ 2020 Reliable Distributor of Electronic Components - Ocean-Components.com

E-mail: Info@Ocean-Components.com

Address: Room 2102, Connaught Commercial Building, 185 Wan Chai Rd, Wan Chai, Hong Kong

