7201SPYZBE Details PDF



C &K	C&K	
C&K		

7201SPYZBE

Part Number:		
Manufacturer/Brand:		
Product description		
Datasheets:		
RoHs Status		
Ship From		
Shipment Way		

7201SPYZBE

C&K SWITCH TOGGLE DPDT 0.4VA 20V 7201SPYZBE.pdf

Lead free / RoHS Compliant Hong Kong DHL/Fedex/TNT/UPS/EMS

REQUEST FOR QUOTATION


Image may be representation. See specifications for product details.

PART NUMBER Z201SPYZBE MANUFACTURER C&K DESCRIPTION SWITCH TOGGLE DPDT 0.4VA 20V LEAD FREE STATUS / ROHS STATUS Lead free / RoHS Compilant DATA SHEET © 7201SPYZBE.pdf VOLTAGE RATING - DC 20V VOLTAGE RATING - AC 20V TERMINATION STYLE Solder Lug SWITCH FUNCTION On-On SERIES 7000 PAREL CUTOUT DIMENSIONS Circular - 6.35mm Dia PACKAGING Buik OPERATING TEMPERATURE -30°C ~ 85°C MOUNTING TYPE Panel Mount MOUSTURE SENSITIVITY LEVEL (MSL) 1 (Unlimited) ILLUMINATION VOLTAGE (NOMINAL) - ILLUMINATION VOLTAGE (NOMINAL) - ILLUMINATION TYPE, COLOR - ILLUMINATION Non-Illuminated IEACTURES Epoxy Sealed Terminals ELECTRICAL LIFE 100,000 Cycles DETAILED DESCRIPTION Toggle Switch DPDT Panel Mount CURRENT RATING 0-4VA (AC/DC) CIRCUIT DPDT BUSHING THREAD 104-40 ACTUATOR TYPE Anth-Rotatio		
MANUFACTURERC&KDESCRIPTIONSWITCH TOGGLE DPDT 0.4VA 20VLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantDATA SHEET2721SPYZBE.pdfVOLTAGE RATING - DC20VVOLTAGE RATING - AC20VTERMINATION STYLESolder LugSWITCH FUNCTIONOn-OnSERIES7000PANEL CUTOUT DIMENSIONSCircular - 6.35mm DiaPACKAGINGBulkOPERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPEPanel MountMANUFACTURER STANDARD LEAD TIME11 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATIONToggle Switch DPDT Panel MountILLUMINATIONToggle Switch DPDT Panel MountCURRENT RATING0.4VA (AC/DC)CIRCUITDPDTBUSHING THREAD1/4-40ACTUATOR TYPEAnti-RotationACTUATOR MATERIALBrass, Chrome Plated		Specifications of 7201SPYZBE
MANUFACTURERC&KDESCRIPTIONSWITCH TOGGLE DPDT 0.4VA 20VLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantDATA SHEET2721SPYZBE.pdfVOLTAGE RATING - DC20VVOLTAGE RATING - AC20VTERMINATION STYLESolder LugSWITCH FUNCTIONOn-OnSERIES7000PANEL CUTOUT DIMENSIONSCircular - 6.35mm DiaPACKAGINGBulkOPERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPEPanel MountMANUFACTURER STANDARD LEAD TIME11 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATIONToggle Switch DPDT Panel MountILLUMINATIONToggle Switch DPDT Panel MountCURRENT RATING0.4VA (AC/DC)CIRCUITDPDTBUSHING THREAD1/4-40ACTUATOR TYPEAnti-RotationACTUATOR MATERIALBrass, Chrome Plated		
DESCRIPTIONSWITCH TOGGLE DPDT 0.4VA 20VLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantDATA SHEETGr 201SPYZBE.pdfVOLTAGE RATING - DC20VVOLTAGE RATING - ACSolder LugSWITCH FUNCTIONOn-OnSWITCH FUNCTIONGrolar - 6.3Smm DiaSARES700PAREL CUTOUT DIMENSIONSGrclar - 6.3Smm DiaPACKAGINGBulkOPERATING TEMPERATUREAnd MountMOUNTING TYPE9.0°C ~ 85°CMOUNTING TYPE1.01mited)MAUFACTURER STANDARD LEAD TIME1.01mited)ILLUMINATION VOLTAGE (NOMINAL)1.01mited)ILLUMINATION VOLTAGE (NOMINAL)0.1ILLUMINATION TYPE, COLORJO.00 CyclesILLUMINATION TYPE, COLORJO.00 CyclesILLUMINATIONGrade CyclesILLUMINATIONJO.00 Cycles <td></td> <td></td>		
LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantDATA SHEET202VOLTAGE RATING - DC202VOLTAGE RATING - ACSolder LugSWITCH FUNCTIONSolder LugSWITCH FUNCTIONOn-OnSERIES700PAREL CUTOUT DIMENSIONSGrcular - 6.35mm DiaPACKAGINGBulkOPERATING TEMPERATUREAneNountMOUNTING TYPEPanel MountMOUNTING TYPE10 Unimited)MAUFACTURER STATUS / ROHS STATUSLed free / ROHS CompliantILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION VOLTAGE (NOMINAL)-ELETRICAL LIFE10,000 CyclesILLUMINATION TYPE, COLORJOUNG CyclesILLUMINATION TYPE, COLORGregle Switch DPDT Panel MountCIRCUITDPTGIRGUETTATING-CIRCUITJOUNG CyclesILLUMINATION TYPE, COLORJOUNG CyclesILLUMINATION TYPE, COLORGregle Switch DPDT Panel MountCIRCUITCIRCUITBUSHING THREADJOUNG CyclesCIRCUITJOUNG CyclesCIRCUITCIRCUITBUSHING THREADJALAGATIONCIRCUITCIRCUITAUTAGE TYPEANI-ROATIONAUTAGE TYPEANI-ROATIONAUTAGE TYPEANI-ROATIONAUTAGE TYPEANI-ROATIONAUTAGE TYPEANI-ROATIONAUTAGE TYPEANI-ROATIONAUTAGE TYPEANI-ROATION		
Data SHEET© 7201SPYZBE.pdfVolTAGE RATING - DC20VvolTAGE RATING - AC20VvolTAGE RATING - AC20Vstremination StyleSolder Lugswitch Function0n-Onseries700PANEL CUTOUT DIMENSIONSCircular - 6.35mm DiapACKAGINGBulkoperating Temperature-30°C ~ 85°CMOUNTING TYPEPanel MountMOUNTING TYPE10 (Inlinited)MOUNTING TYPELead free / RoHS CompliantILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION VOLTAGE (NOMINAL)Non-IlluminatedILLUMINATION TYPE, COLOR10,000 CyclesILLUMINATION TYPE, COLOR10,000 CyclesILLUMINATION-ICRRENT RATING10,000 CyclesILLUMINATION-ICRRENT RATING-ICRRENT RATING-ICRRENT RATING-ICRRENT RATING-ICRRENT RATING-ICRRENT RATING-ICRRENT RATING-ICRUIT-ICRUIT-ICRUIT-ICRUIT-ICRUIT-ICRUIT-ICRUIT-ICRUIT-ICRUIT-ICRUIT-ICRUIT-ICRUIT-ICRUIT-ICRUIT-ICRUIT-ICRUIT-ICRU	DESCRIPTION	SWITCH TOGGLE DPDT 0.4VA 20V
Voltage Rating - DC20VVoltage Rating - AC20VVoltage Rating - AC20VTERMINATION STYLESolder LugSwitch Function0n-OnSeries7000PANEL CUTOUT DIMENSIONSCircular - 6.35mm DiaPACKAGINGBulkOPERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPE10 Unimited)MOISTURE SENSITIVITY LEVEL (MSL)11 Unimited)ILLUMINATION STATUSLead free / RoHS CompliantILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR0.000 CyclesELECTRICAL LIFE10,000 CyclesILLUMINATION-302 CyclesILLUMINATION-302 CyclesILLUMINATION-302 CyclesILLUMINATION10,000 CyclesILLUMINATION-302 Cycles<	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
VOLTAGE RATING - AC20VTERMINATION STYLESolder LugSWITCH FUNCTIONOn-OnSERIES700PANEL CUTOUT DIMENSIONSGrouler - 6.35mm DiaPACKAGINGGucluar - 6.35mm DiaPOPERATING TEMPERATURESolder AsS°CMOUNTING TYPEAnal MountMANUFACTURER STANDARD LEAD TIME1 (Unimited)ILLUMINATION YOLTAGE (NOMINAL)-ILLUMINATION YOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLORJonge Saled TerminalsILLUMINATION YOLTAGE (NOMINAL)InolILLUMINATION TYPE, COLORJonge Saled TerminalsILLUMINATION YOLTAGE (NOMINAL)InolILLUMINATION TYPE, COLORJonge Saled TerminalsILLUMINATIONInol CyclesILLUMINATIONInol CyclesILLUMINATIONJonge Saled TerminalsILLUMINATIONJONG CyclesILLUMINATIONJONG CyclesILLUMINATIONInol CyclesILLUMINATIONJONG CyclesILLUMINATIONJO	DATA SHEET	7201SPYZBE.pdf
TERMINATION STYLESolder LugSWITCH FUNCTIONOn-OnSKIES700PANEL CUTOUT DIMENSIONSGrcular - 6.35mm DiaPACKAGINGBulkOPERATING TEMPERATURE30°C ~ 85°CMOUNTING TYPEPanel MountMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MANUFACTURER STANDARD LEAD TIME1 (VerksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLORJono CyclesELECTRICAL LIFEIogues StatusILLUMINATIONTogge Switch DPDT Panel MountCURRENT RATING04VA (AC/DC)BUSHING THREADJuf-QuesACTUATOR TYPEJuf-QuesACTUATOR TYPEJuf-QuesACTUATOR TYPEANT-RATENAACTUATOR TYPEMarceACTUATOR TYPEMarceACTU	VOLTAGE RATING - DC	20V
SWITCH FUNCTIONOn-OnSRIES7000PANEL CUTOUT DIMENSIONSCirclar - 6.35mm DiaPACKAGINGBulkOPERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPEPanel MountMOINTING TYPE1010inited)MANUFACTURER STANDARD LEAD TIME1010inited)ILAD FREE STATUS / ROHS STATUSCad free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)Nor-IlluminatedILLUMINATION TYPE, COLORSingel Seidel TerminateIECTRICAL LIFE10,000 CyclesIELCTRICAL LIFE01000 CyclesICRURENT FATING9000 CyclesILLUMING THREAD10400 CyclesISHING THREAD10400 CyclesICRUTI10400 CyclesICRUTI10400 CyclesISHING THREAD10400 Cycles	VOLTAGE RATING - AC	20V
SERIES700PARE CUTOUT DIMENSIONSCircular - 6.35mm DiaPACKAGINGBulkOPERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPEPanel MountMOUNTING TYPE1 (Unlimited)MANUFACTURER STANDARD LEAD TIME1 (Unlimited)ILLDA FREE STATUS / ROHS STATUSLead Free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)Non-IlluminatedILLUMINATION TYPE, COLOR-IECTRICAL LIFEDiolo CyclesIELCTRICAL LIFEJOJOD CyclesICRUENT RATINGOVA(AC/DC)ICRUENT RATINGJOHAISHING THREADJOHAISHING THREADJOHAACTUATOR TYPEJACACIMANISHING THREADJOHAISHING THREADJOHA <td< td=""><td>TERMINATION STYLE</td><td>Solder Lug</td></td<>	TERMINATION STYLE	Solder Lug
PANEL CUTOUT DIMENSIONSCircular - 6.35mm DiaPACKAGINGBulkPOERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPEPanel MountMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimetd)MANUFACTURER STANDARD LEAD TIME1 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-FLATURESEgos Saled TerminalsILLUMINATION TYPE, COLOR10,000 CyclesIECTRICAL LIFE10,000 CyclesICRRENT RATING-CURRENT RATING-CURRENT RATING-SIGNIG THREAD-AGUAT-ATUATOR TYPE-ATUATOR TYPE <td< td=""><td>SWITCH FUNCTION</td><td>On-On</td></td<>	SWITCH FUNCTION	On-On
PACKAGINGBukPACKAGING-30°C ~ 85°CMOUNTING TEMPERATUREPanel MountMOUNTING TYPE1 (Unimited)MOISTURE SENSITIVIT LEVEL (MSL)1 (Unimited)MANUFACTURER STANDARD LEAD TIMELead free / ROHS CompliantLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATION TYPE, COLORNon-IluminatedFEATURESBoy Sealed TeminalsELECTRICAL LIFE10,000 CyclesICURRENT RATINGOL4X (AC/DC)CURRENT RATINGDPTGISHING THREADJ440ACTUATOR TYPEAnti-RotationACTUATOR TYPEBass, Chrome Plated Marcel	SERIES	7000
OPERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPEPanel MountMOISTURE SENSITIVITY LEVEL (MSL)I (Unimited)MANUFACTURER STANDARD LEAD TIMEI WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLORIonalILLUMINATIONHoralFEATURESBoxy Sealed TerminalsILLUMINATION10,000 CyclesILLORIENT RATINGIongle Switch DPDT Panel MountCIRCUITDPDTISHING THREADIA40AACTUATOR TYPEAnti-RotationACTUATOR TYPEBase, Chrome Plated Mount	PANEL CUTOUT DIMENSIONS	Circular - 6.35mm Dia
MOUNTING TYPEPanel MountMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MANUFACTURER STANDARD LEAD TIME1 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLORNon-IlluminatedILLUMINATIONEpsy Sealed TerminalsIECTRICAL LIFE100,000 CyclesCURRENT RATING0.4VA (AC/DC)CURRENT RATINGJOPTACUJATOR TYPEJAT-AACTUATOR TYPEMaine and	PACKAGING	Bulk
NOTSTURE SENSITIVITY LEVEL (MSL)I (Unlimited)MANUFACTURER STANDARD LEAD TIME11 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLORNon-IlluminatedILLUMINATION TYPE, COLORSpay Sealed TerminalsILLUMINATIONNon-IlluminatedFEATURESBoy Sealed TerminalsIECTRICAL LIFENonO CyclesICRCUTOPDTRINGING THREADPDTACIVATOR TYPEArit-RotanoACTUATOR TYPEMain andACTUATOR MATERIALBosh CompleadedACTUATOR MATERIALBosh Compleaded	OPERATING TEMPERATURE	-30°C ~ 85°C
MANUFACTURER STANDARD LEAD TIME11 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATION TYPE, COLORKon-IlluminatedFEATURESEpoxy Sealed TerminalsELECTRICAL LIFE10,000 CyclesOLTAILED DESCRIPTIONOAVA (AC/DC)CURRENT RATINGDPDTCURRENT RATINGJAHAACTUATOR TYPEAti-RotationACTUATOR TYPESiss, Chrome Plated	MOUNTING TYPE	Panel Mount
LAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATIONNon-IluminatedFATURESEpox Sealed TerminalsELECTRICAL LIFE100,000 CyclesCURRENT RATINGNon-IluminatedCURRENT RATINGDPTBUSHING THREADJACHACHORACTUATOR TYPEAni-RotationACTUATOR MATERIALBass,Chome Plated	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
INGRESS PROTECTION	MANUFACTURER STANDARD LEAD TIME	11 Weeks
ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATION TYPE, COLORNon-IluminatedILLUMINATIONNon-IluminatedFEATURESBoy Sealed TerminalsFEATURES10,000 CyclesDETAILED DESCRIPTIONNon-IluminatedCURRENT RATING0.4VA (AC/DC)CURRENT RATINGJDPTBUSHING THREAD1/4-00ACTUATOR TYPEAnti-RotationACTUATOR MATERIALBras, Chrome Plated	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ILLUMINATION TYPE, COLOR - ILLUMINATION Non-Illuminated FEATURES Epoxy Sealed Terminals ELECTRICAL LIFE 100,000 Cycles DETAILED DESCRIPTION Toggle Switch DPDT Panel Mount CURRENT RATING 0.4VA (AC/DC) CIRCUIT DPDT BUSHING THREAD 1/4-40 ACTUATOR MATERIAL Brass, Chrome Plated	INGRESS PROTECTION	
ILLUMINATIONNon-IlluminatedFEATURESEpoxy Sealed TerminalsELECTRICAL LIFE100,000 CyclesDETAILED DESCRIPTIONToggle Switch DPDT Panel MountCURRENT RATING0.4VA (AC/DC)BUSHING THREADDPDTACTUATOR TYPEAnti-RotationACTUATOR MATERIALBrass, Chrome Plated	ILLUMINATION VOLTAGE (NOMINAL)	
FEATURESEpoxy Sealed TerminalsELECTRICAL LIFE100,000 CyclesDETAILED DESCRIPTIONTogle Switch DPDT Panel MountCURRENT RATING0.4VA (AC/DC)BUSHING THREADDPDTACTUATOR TYPEAnti-RotationACTUATOR MATERIALBass, Chrome Plated	ILLUMINATION TYPE, COLOR	
ELECTRICAL LIFE100,000 CyclesDETAILED DESCRIPTIONTogle Switch DPDT Panel MountCURRENT RATING0.4VA (AC/DC)CIRCUITDPDTBUSHING THREAD1/4-40ACTUATOR TYPEAnti-RotationACTUATOR MATERIALBrass, Chrome Plated	ILLUMINATION	Non-Illuminated
DETAILED DESCRIPTIONToggle Switch DPDT Panel MountCURRENT RATING0.4VA (AC/DC)CIRCUITDPDTBUSHING THREAD1/4-40ACTUATOR TYPEAnti-RotationACTUATOR MATERIALBrass, Chrome Plated	FEATURES	Epoxy Sealed Terminals
CURRENT RATING0.4VA (AC/DC)CIRCUITDPDTBUSHING THREAD1/4-40ACTUATOR TYPEAnti-RotationACTUATOR MATERIALBrass, Chrome Plated	ELECTRICAL LIFE	100,000 Cycles
CURRENT RATING0.4VA (AC/DC)CIRCUITDPDTBUSHING THREAD1/4-40ACTUATOR TYPEAnti-RotationACTUATOR MATERIALBrass, Chrome Plated	DETAILED DESCRIPTION	Toggle Switch DPDT Panel Mount
CIRCUITDPDTBUSHING THREAD1/4-40ACTUATOR TYPEAnti-RotationACTUATOR MATERIALBrass, Chrome Plated	CURRENT RATING	0.4VA (AC/DC)
ACTUATOR TYPE Anti-Rotation Anti-Rotation Brass, Chrome Plated	CIRCUIT	
ACTUATOR TYPE Anti-Rotation Anti-Rotation Brass, Chrome Plated	BUSHING THREAD	1/4-40
ACTUATOR MATERIAL Brass, Chrome Plated	ACTUATOR TYPE	
	ACTOATOR LENGTH	10.0/1111

Related Tags

C&K 7201SPYZBE	7201SPYZBE Distributor	7201SPYZBE Supplier
7201SPYZBE Price	7201SPYZBE Pictures	7201SPYZBE Image
7201SPYZBE PDF Datasheet	7201SPYZBE Download Datasheet	7201SPYZBE Datasheet
7201SPYZBE Stock	Buy 7201SPYZBE	Buy C&K 7201SPYZBE
C&K 7201SPYZBE	C&K Supplier	C&K Distributor
C&K 7201SPYZBE	C&K Components 7201SPYZBE	

Related Products

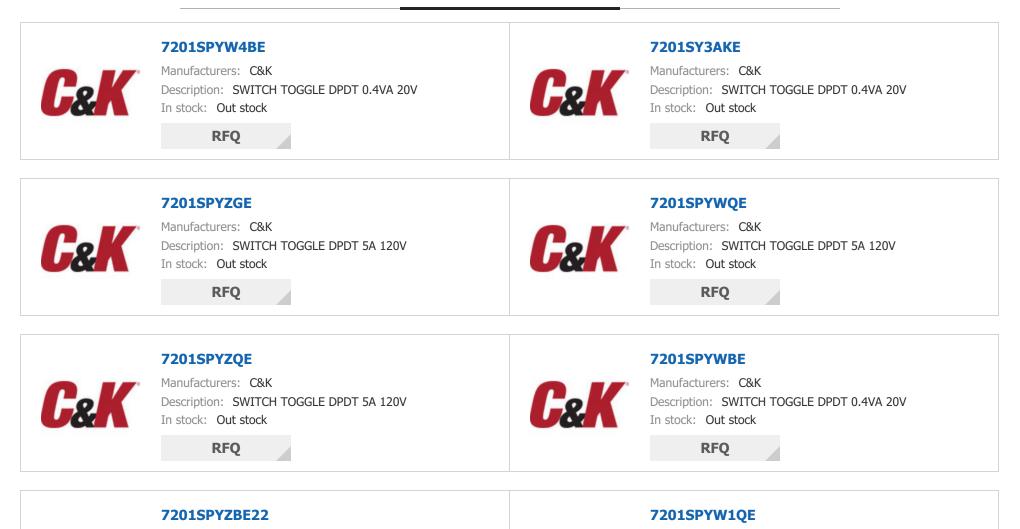



Manufacturers: C&K Description: SWITCH TOGGLE DPDT 0.4VA 20V In stock: Out stock

RFQ



Manufacturers: C&K Description: SWITCH TOGGLE DPDT 5A 120V In stock: Out stock

RFQ

7201SPYW4QE **7201SPYZBI** Manufacturers: C&K Manufacturers: C&K **G**&K **G**& Description: SWITCH TOGGLE DPDT 0.4VA 20V Description: SWITCH TOGGLE DPDT 5A 120V In stock: Out stock In stock: Out stock RFQ RFQ **7201SPYZQI 7201SPYZ3QE** Manufacturers: C&K Manufacturers: C&K **G**&K 62 Description: SWITCH TOGGLE DPDT 5A 120V Description: SWITCH TOGGLE DPDT 5A 120V In stock: Out stock In stock: Out stock RFQ RFQ

Copyright @ 2020 Reliable Distributor of Electronic Components - Ocean-Components.com

E-mail: Info@Ocean-Components.com

Address: Room 2102, Connaught Commercial Building, 185 Wan Chai Rd, Wan Chai, Hong Kong

