

CeK	C&K	
<b>G</b> &K		

#### K12PYE23.5N

Part Number:
Manufacturer/Brand:
Product description
Datasheets:
RoHs Status
Ship From
Shipment Way

#### K12PYE23.5N

C&K SWITCH PUSH SPST-NO 0.1A 30V K12PYE23.5N.pdf

Lead free / RoHS Compliant Hong Kong DHL/Fedex/TNT/UPS/EMS

#### **REQUEST FOR QUOTATION**


Image may be representation. See specifications for product details.

Specifications of K12PYE23.SN       PART NUMBER     K12PYE23.SN       MAILUPACTURER     Cok       DESCRIPTION     SWITCH PUSH SPST-N0.0.1A.30V       LEAD FREE STATUS / ROHS STATUS     Lead free / RoHS Compliant       DATA SHEET     SWITCH PUSH SPST-N0.0.1A.30V       VOLTAGE RATING - DC     30V       YOLTAGE RATING - DC     30V       TYPE     Keyswitch       TERMINATION STYLE     PC Pin       SWITCH FUNCTION     Off-Mom       SEREES     N12       PARE CUTOUT DIMENSIONS     -       PARE CUTOUT DIMENSIONS     -       PARE CUTOUT LIMERES TATUS / ROHS STATUS     LEAD FREE STATUS / ROHS STATUS       MOUNTING TYPE     Through Hole       MOUNTING TYPE     Through Hole       MOUNTING TYPE     STATUS       LEAD FREE STATUS / ROHS STATUS     Lead free / RoHS Compliant-       ILUMINATION NOLTAGE (NORDIDAL)     -       LEAD FREE STATUS / ROHS STATUS     Lead free / RoHS Compliant-       ILUMINATION NOLTAGE (NORDIDAL)     -       LEAD FREE STATUS / ROHS STATUS     Lead free / RoHS Compliant-       ILUMINATION NOLTAGE (NORDIDAL)		
NAMUFACTURERCKKDESCRIPTIONSWITCH PUSH SPST-ND 0.1A 30VLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantDATA SHEETEx K12PYE23.SN.pdfVOLTAGE RATING - DC30VTYPEKeyswitchTERMINATION STYLEPC PnSWITCH FUNCTIONOff-MomSKITCH FUNCTIONOff-MomSERIESK12ANALE LOTOUT DIMENSIONS-OFLERA ATING - DCBulkOFLERA ATING - EMPERATURE+0°C % 8°CMOUNTING TYPEThrough HoleMOUNTING TYPE1 (Unlimited)MOUNTING TYPE1 (Unlimited)MOUNTING TYPE-MAUFACTURER STANDARD LEAD TIMEBeeksLILUMINATION NOLTAGE (MOMINAL)-LILUMINATION TYPE, COLOR-FARTURES-MAUFACTURES RADDARD LEAD TIMEBeeksLILUMINATION TYPE, COLOR-LILUMINATION TYPE, COLOR-CORRENT RATING-CORRENT RATING-CORRENT RATING-LILUMINATION TYPE, COLOR-CORRENT RATING-COLOR - ACTLIATOR/CAPYellowCOLOR - ACTLIATOR/CAPYellowCOLOR - ACTLIATOR/CAPYEINONCOLOR - ACTLIATOR/CAPYEI		Specifications of K12PYE23.5N
MANUFACTURERCKDESCRIPTIONSUTCH PUSH SPST-ND 0.1A 30VLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantDATA SHEETIm K12PYE23.SN.pdfVOLTAGE RATING - DC30VTYPEKeywitchTRMINATION STVLEPC PinSUTCH FUNCTIONOff-MomSERIESK12PARLE LOT OUT DIMENSIONS-OFTER ATING - DCYIG*S300PPOFTER ATING THENorough HoleOFTER ATING THE-MOUNTING TYPE10/Unimited)MOUNTING TYPE-MAUFACTURER STANDARD LEAD TIME& WeeksLEAD FREE STATUS / ROHS STATUS-LUUMINATION YOUTAGE (NOMINUL)-LUUMINATION YOUTAGE (NOMINUL)-LUUMINATION YOUTAGE (NOMINUL)-LUUMINATION YOUTAGE (NOMINUL)-LECTRICAL LIFEJA00,000 CyclesLUUMINATION YOUTAGE (NOMINUL)-LECTRICAL LIFEJA00,000 CyclesLUUMINATION YOUTAGE (NOMINUL)-CHARLES DESCRIPTIONMORALORLIUMINATION YOUTAGE (NOMINUL)-CHARLES DESCRIPTIONPAISHUTON SWICH SPST-NO Keyswitch Through HoleCUUR - ACTUATOR/CAPYEINONCUUR - ACTUATOR/CAP		
DESCRIPTIONSUTGH PUSH SPST-N0 0.1A 30VLEAD REES STATUS / ROHS STATUSKad free / RoHS CompliantDATA SHEETKI XEPPE23.5N.pdfVILTAGE RATING - DCGVTFFKagwitchTERMINATION STYLEPC PinSWITCH FUNCTIONOff-MomSERESK12PARL CUTOUT DIMENSIONS-PARL CUTOUT DIMENSIONSSIGOTER NAMESSIGOTER TIME FUNCTION-OTER TIME STATUS-OWITING TYPE-MOUTING TYPE-MOUTING TYPE-MOUTING TYPE-MOUTING TYPE-MAULIFACTURES STATUTY LEVEL (MSL)101/Initel/MURATURES STATUTY LEVEL (MSL)-ILIMINATION YOUTAGE (MOMINAL)-ILIMINATION YOUTAGE (MO		
LAD FREE STATUS / ROHS STATUSLad fee/ ROHS CompliantDATA SHEETGIVVOLTAGE RATING - DC3VTYPEKeyskichTREMINATION STYLEPP InSWITCH FUNCTIONOff-MonSWITCH FUNCTIONGIVSREESKI2PAREL CUTOUT DIMENSIONS-PACKAGINGJIG STORFOTHER NAMESVIG STORFOTHER NAMES10 (Unlimited)MOUTTING TYPE10 (Unlimited)MOUTTING TYPE10 (Unlimited)MOUTTING TYPE10 (Unlimited)MAUF CUTORT STATUS140MAUF CUTORT STATUS140ILL MINATION YOLTAGE (NOMINAL)-ILL MINATION TYPE COLOR10 (Unlimited)ILL MINATION TYPE, COLOR10 (UNDON CUTES)ILL MINATION TYPE, COLOR10 (UNDON CUTES)ILL MINATION TYPE, COLOR10 (UNDON CUTES)ILL DESCRIPTION10 (UNDON CUTES) <trr>ILL DESCRIPTION10 (U</trr>	MANUFACTURER	C&K
DATA SHEFTImage: Page Page Page Page Page Page Page Page	DESCRIPTION	SWITCH PUSH SPST-NO 0.1A 30V
VoltAGE RATING - DCVOLTAGE RATING - DCVOLTAGE RATING - DCVOLTAGE RATING - DCSWITCH FUNCTIONSWITCH FUNCTIONSWITCH FUNCTIONSRIESVOLTAGE RATING - DCPAREL CUTOUT DIMENSIONSOFTER AT MARESOTHER NAMESOTHER NAMESOVERATING TEMPERATUREMOUNTING TYPEMOUNTING TYPEMOUNTING TYPEMOUNTING TYPEMOUNTING TYPEMOUNTING TYPELEAD FREE STATUS / ROHS STATUSILUMINATION VOLTAGE (NOMINAL)ILUMINATION TYPE, COLORILUMINATION TYPE, COLORI	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
TYPEKeywithTRPEPinSWITCH TUNCTONOf-MonSRITESK12PARL GUTOUT DIMENSIONSRPARCAGINGBukOTHER NAMESAG500POTHER NAMESAG600CMOUTING TYPEGN04 DOGMOUTING TYPEInluminedMOUTING TUPE STATUSAG600CMURJER SENSTITUT LEVEL (MSL)I (Unlimed)MURJER SENSTITUT LEVEL (MSL)I GN04 DOGMURJER STATUS / ROHS STATUSI GN04 DOGILUMINATION VOLTAGE (NOMINAL)I GN04 DOGILUMINATION VOLTAGE (NOMINAL)I GIE FERDERALILUMINATION TYPE, COLORJ G000 CyclesILUMINATION TYPE, COLORI GN04 DOGILUMINATION TYPE,	DATA SHEET	m K12PYE23.5N.pdf
TERMINATION STYLEPC PinSWITCH FUNCTIONOff-MomSERIESK12PANEL GUTOUT DIMENSIONSRuPARCAGINGBukOTHER NAMESY0145300FPOTHER NAMES40°C 85°CMOUNTING TYPEGUTONIE HOLD CONTROLMOUNTING TYPE(1/IIIIIIIII)MOUNTING TYPE1/IIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII	VOLTAGE RATING - DC	30V
SWITCH FUNCTIONOff-MomSERIESK12PALE CUTOUT DIMENSIONS-PACKAGINGRIRPACKAGINGNIGOTHER NAMES-OTHER NAMES-MOUNTING TEMPERATURE-MOUNTING TYPE-MOUNTING TYPE-MOUNTING TYPE-MOUNTING TATELE SATIONTY LEVEL (MSL)-MAUFACTURER STANDARD LEAD TIME-MAUFACTURER STANDARD LEAD TIME-ILGEN FRACTER STATUS / GON JAMA-ILGUININTON YOLTAGE (MOMINAL)-ILGUININTON YOLTAG	ТҮРЕ	Keyswitch
SERESK2PAREL CUTOUT DIMENSIONS-PACKAGINGBIRPACKAGINGSIGOTER NAMES-OPERATING TEMPERATURE-MOUNTING TYPE1000 HOIRMOSTURE SENSITIVIT LEVEL (MSL)1MAUFACTURER STANDARD LEAD TIME3IEAD FREE STATUS / ROHS STATUSSIG REG / ROHS COMPILATION OLI AGE (MOMINAL)ILUMINATION YDE, COLOR-ILUMINATION YDE, COLOR-ILUMINATION YDE, COLOR-IEAT RESSIG REG SEATURS (MOMINAL)ILUMINATION YDE, COLOR-ILUMINATION YDE, COLOR-ILUM	TERMINATION STYLE	PC Pin
PANEL CUTOUT DIMENSIONS-PACKAGINGBukPACKAGINGYIGT3000POTHER NAMESYIGT3000POPERATING TEMPERATUREA0°C ~ 8°CMOUNTING TYPETongh HoleMOUNTING TYPE(JIMIINE)MCHANICAL LIFEYIGT AGA COMPAILMAUVFACTURER STANDARD LEAD TIMEBVeksILAD FREE STATUS / ROHS STATUSFAG FRE AGA COMPAILILIMIINATION YOLTAGE (NOMINAL)-ILIMIINATION TYPE, COLOR-ILIMIINATION TYPE, COLOR-ILIMIINATION TYPE, COLORColor AGAILIMIINATION TYPE, COLORSIMONOCUSEILIMIINATION TYPE, COLORJONOO COMPAILILIMIINATION TYPE, COLORSIMONOCUSEILIMIINATION TYPE, COLORColor AGAILICATICAL LIFEJONOO COMPAILILICATICAL LIFESIMONOCUSEILICATICAL LIFESIMONOCUSEILICARATINGGIMA (COLOR COMPAILILICARATINGSIMONOCUSEILICARATINGSIMONOCUSEILICARATINGSIMONOCUSEILICARATINGSIMONOCUSEILICARATINGSIMONOCUSEILICARATINGSIMONOCUSEILICARATINGSIMONOCUSEILICARATINGSIMONOCUSEILICARATINGSIMONOCUSEILICARATINGSIMONOCUSEILICARATINGSIMONOCUSEILICARATINGSIMONOCUSEILICARATINGSIMONOCUSEILICARATINGSIMONOCUSEILICARATINGSIMONOCUSEILICARATINGSIMONOCUSEILICARATINGSIMONOCUSE <tr< td=""><td>SWITCH FUNCTION</td><td>Off-Mom</td></tr<>	SWITCH FUNCTION	Off-Mom
PACKAGINGBukOTHER NAMESVIGTASSOUPPOPERATING TEMPERATURE40°C ASPCMOUNTING TYPEThrough HoleMOUNTING TYPE(Unlimited)MECHANICAL LIFEMANUFACTURER STANDARD LEAD TIMEBederse AnstanceILADI FREE STATUS / ROHS STATUSBed free / ROHS CompliantILUMINATION VOLTAGE (NOMINAL)-ILUMINATION VOLTAGE (NOMINAL)-ILUMINATION TYPE, COLOR-IEATRESJOIDO COLESILEATRESJOIDO COLESILEATRESJOIDO COLESILEATRESJOIDO COLESILEATRESIOMA (COLESICURENT RATINGHOINA (COLESICURALTARTINGSTENOILINATION COLAGESTENO	SERIES	K12
OTHER NAMESY6745300POPERATING TEMPERATURE40° A 5° GMOUNTING TYPETrough HoleMOSTURE SENSITIVT LEVEL (MSL)1 (Inlimited)MECHANICAL LIFE-MANUFACTURER STANDARD LEAD TIME8 VesLADS FREE STATUS / ROHS STATUSEdd fre / ROHS CompliantILUMINATION VOLTAGE (NOMINAL)-FLATURESTodie JectobactFLATURES1000 OctobactILUMINATION TYPE, COLOR0.000 OctobactFLATURES1000 OctobactFLATURES1000 OctobactILUEL DESCRIPTIONNOMINALCIARENT ARTING1000 ACCCIARENT ARTING1000	PANEL CUTOUT DIMENSIONS	-
OPERATING TEMPERATURE40° ~ 85°CMOUNTING TYPEThoigh HeiMOISTURE SENSITIVT LEVEL (MSL)1 (Ilmind)MCHANICAL LIFE-MAUFACTURER STANDARD LEAD TIME8 WesLEAD FREE STATUS / ROHS STATUSEval Face ManufactILUMINATION VOLTAGE (NOMINAL)-ILUMINATION VOLTAGE (NOMINAL)-FEATURESTatle FeedbackFEATURES1000 OrgesILUMINATION TYPE, COLOR0000 OrgesICTICAL LIFE0000 OrgesICTICAL LIFE0000 OrgesCIRRENT RATING0000 OrgesCIRRENT RATING1000 OrgesCIRRENT RATING0000 OrgesCIRRENT RATING1000 Orges </td <td>PACKAGING</td> <td>Bulk</td>	PACKAGING	Bulk
MOUNTING TYPEHough HoleMOUNTING TYPEfulnitedMOSTURE SENSITIVT LEVEL (MSL)fulnitedMCHANICAL LIFE-MANUFACTURER STANDARD LEAD TIME8VeskaLEAD FREE SATUS / ROMEINALfulnited CompliantILUMINATION VOLTAGE (NOMINAL)-ILUMINATION VOLTAGE (NOMINAL)-FATURESGatie FeabackILUMINATION TYPE, COLOR-ILECTRICAL LIFEJONO COLORIECTRICAL LIFEIono Korston StratusICURENT RATINGIono Korston StratusICURENT RATINGIono Korston StratusICURENT RATINGJONO KORSTON StratusICURATION COLORIono Korston StratusICURATION COLORIono Korston StratusICURATINGStratus </td <td>OTHER NAMES</td> <td>Y16T45300FP</td>	OTHER NAMES	Y16T45300FP
MOISTURE SENSITIVITY LEVEL (MSL)I (Ulimited)MCHANICAL LIFE-MANUFACTURER STANDARD LEAD TIME8 WeksLEAD FREE STATUS / ROHS STATUSKed free / RoHS CompliantINGRESS PROTECTION140ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION VOLTAGE (NOMINAL)-FATURESColde FactorFLATURES100,000 CyclesICLRENT RATING1000 ACIDESCRIPTIONCURRENT RATING1000 ACIDESCRIPTIONCLORE ACTUATOR/CAPYellowCOLOR - ACTUATOR/CAPYellowSHOMSHOM	OPERATING TEMPERATURE	-40°C ~ 85°C
MECHANICAL LIFE.MANUFACTURER STANDARD LEAD TIME8 WeskLEAD FREE STATUS / ROHS STATUSEad fee / ROHS CompliantINGRESS PROTECTIONF40ILLUMINATION VOLTAGE (NOMINAL).ILLUMINATION VOLTAGE (NOMINAL).FATURESCalle FeedbackFATURES.ILLUMINATION TYPE, COLOR.ILLUMINATION TYPE, COLOR.<	MOUNTING TYPE	Through Hole
MANUFACTURER STANDARD LEAD TIME8 WeeksLEAD FREE STATUS / ROHS STATUSLed free / ROHS CompliantINGRESS PROTECTIONP40ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-FEATURESTatle FeedbackIECTRICAL LIFEJ0000 CyclesCURRENT RATING1000 ACCURSUMAL FINAUGH HOLECLOR - ACTUATOR/CAPHoleCLOR - ACTUATOR/CAPSTENO	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
LAD FRE STATUS / ROHS STATUS   Led fre / ROHS Compliant     INGRESS PROTECTION   IM0     ILLUMINATION VOLTAGE (NOMINAL)   -     ILLUMINATION TYPE, COLOR   -     FATURES   Tatile Feedback     ILECTRICAL LIFE   J0000 Cycles     ICLRENT RATING   Dim0 Cycles     CURRENT RATING   Dim0 Cycles     CLOR - ACTUATOR/CAP   J0000 Cycles     CLOR - ACTUATOR/CAP   Dim0 Cycles     CRUT   STATUS	MECHANICAL LIFE	-
INGRESS PROTECTION     P40       ILLUMINATION VOLTAGE (NOMINAL)     -       ILLUMINATION TYPE, COLOR     -       FEATURES     Tatile Feedback       FLECTRICAL LIFE     .000,000 Cycles       CURRENT RATING     .000,000 Cycles       CLOR - ACTUATOR/CAP     .000,000 Cycles       CLOR - ACTUATOR - CYCLEs     .000,000 Cycles       CLOR - CYCLEs     .000,000 Cycles       CLOR - CYCLEs	MANUFACTURER STANDARD LEAD TIME	8 Weeks
ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATION TYPE, COLOR-FEATURESTotile FeedbackIECTRICAL LIFE-IDETAILED DESCRIPTION-CURRENT RATING-COLOR - ACTUATOR/CAP-IDENAL-STENOL-IDENAL	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ILLUMINATION TYPE, COLOR-FEATURESTatile FeadbackELECTRICAL LIFE0,00,00 CyclesDETAILED DESCRIPTIONPushbutch SPST-NO Keyswitch Through HoleCURRENT RATING0,000 CyclesCOLOR - ACTUATOR/CAPYelowCIRCUITSPST-NO	INGRESS PROTECTION	IP40
FATURESTactie FeedbackELECTRICAL LIFEJ,00,002 (seedback)DETAILED DESCRIPTIONPushbut SPST-NO Keyswitch Through HoleCURRENT RATINGJ00A (DC)COLOR - ACTUATOR/CAPYellowCRUITSPST-NO	ILLUMINATION VOLTAGE (NOMINAL)	-
ELECTRICAL LIFE1,000,000 CyclesDETAILED DESCRIPTIONPushbutton SPST-NO Keyswitch Through HoleCURRENT RATING100mA (DC)COLOR - ACTUATOR/CAPYellowCIRCUITSPST-NO	ILLUMINATION TYPE, COLOR	
DETAILED DESCRIPTION   Pushbutton SPST-NO Keyswitch Through Hole     CURRENT RATING   100mA (DC)     COLOR - ACTUATOR/CAP   Yellow     CIRCUIT   SPST-NO	FEATURES	Tactile Feedback
CURRENT RATING100mA (DC)COLOR - ACTUATOR/CAPYellowCIRCUITSPST-NO	ELECTRICAL LIFE	1,000,000 Cycles
COLOR - ACTUATOR/CAP Yellow   CIRCUIT SPST-NO	DETAILED DESCRIPTION	Pushbutton Switch SPST-NO Keyswitch Through Hole
CIRCUIT SPST-NO	CURRENT RATING	100mA (DC)
	COLOR - ACTUATOR/CAP	Yellow
ACTUATOR TYPE Round, Button	CIRCUIT	SPST-NO
	ACTUATOR TYPE	Round, Button

### **Related Tags**

C&K K12PYE23.5N	K12PYE23.5N Distributor	K12PYE23.5N Supplier
K12PYE23.5N Price	K12PYE23.5N Pictures	K12PYE23.5N Image
K12PYE23.5N PDF Datasheet	K12PYE23.5N Download Datasheet	K12PYE23.5N Datasheet
K12PYE23.5N Stock	Buy K12PYE23.5N	Buy C&K K12PYE23.5N
C&K K12PYE23.5N	C&K Supplier	C&K Distributor
C&K K12PYE23.5N	C&K Components K12PYE23.5N	

## **Related Products**

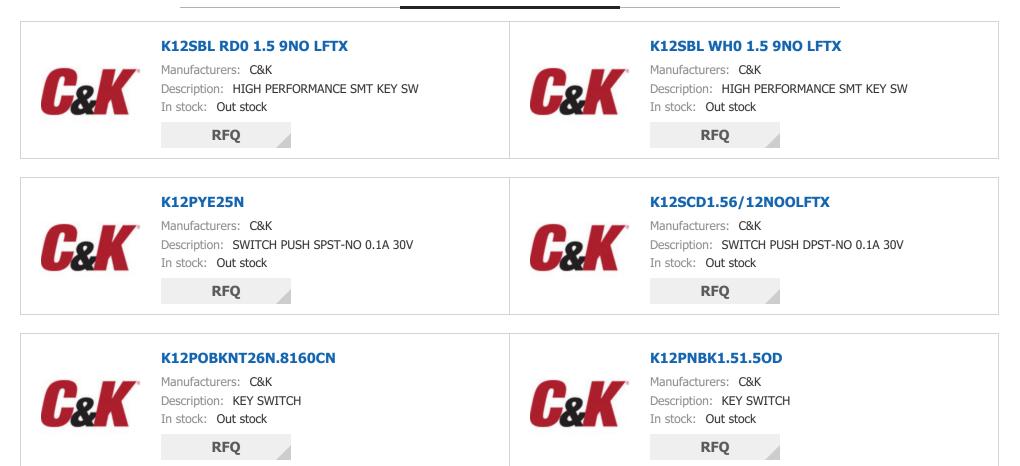



# K12SBL YE0 1.5 9NO LFTX Manufacturers: C&K

# K12POBK26N .8200CN

# Manufacturers: C&K


Description: HIGH PERFORMANCE SMT KEY SW In stock: Out stock

RFQ



Description: KEY SWITCH In stock: Out stock

RFQ

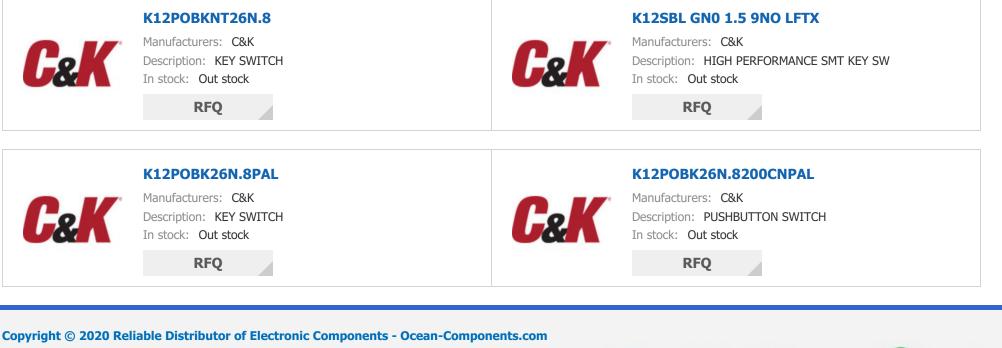

E-mail: Info@Ocean-Components.com

Address: Room 2102, Connaught Commercial Building, 185 Wan Chai Rd, Wan Chai, Hong Kong

