ME04L1NCQF Details PDF



CeK	C&K	
C &K		

ME04L1NCQF

Part Number:		
Manufacturer/Brand:		
Product description		
Datasheets:		
RoHs Status		
Ship From		
Shipment Way		

ME04L1NCQF

C&K SWITCH ROTARY 4POS 250MA 125V ME04L1NCQF.pdf 💒 Lead free / RoHS Compliant

Hong Kong DHL/Fedex/TNT/UPS/EMS

REQUEST FOR QUOTATION


Image may be representation. See specifications for product details.

PART UNMEER MED41.INCQF MANUFACTURER C&K DESCRIPTION SUITCH ROTARY 4POS 250MA 125V LEAD FREE STATUS / ROHS STATUS Lead free / RoHS Compliant DATA SHEET Immeduation (Compliant) VOLTAGE RATING - DC 28V VOLTAGE RATING - AC 125V TERMINATION STYLE PC Pin SERIES M PAREL CUTOUT DIMENSIONS Geckar - 6.60mm Dia OPERATING FORE 2.88 - 5.041g/m NUMBER OF POSITIONS 4 NUMBER OF POSITIONS 4 NUMBER OF POSITIONS 4 NUMBER OF POSITIONS 1 NUMBER OF POSITIONS 1 NUMBER OF POSITIONS 4 NUMBER OF POSITIONS 1 NUMBER OF POSITIONS 1 NOUSTURE STATUS / ROHES STATUS 13 Weaks LEAD FREE STATUS / ROHES STATUS Lead free / RoHS Compliant NOUSTURE STATUS / ROHES STATUS Lead free / RoHS Compliant INDEX STORS FXed FEATURES MOLTAGE MER / ROHES COMPLIANT PROUPOI DETAILED DESCRIPTION		Specifications of ME04L1NCQF
MANUFACTURERCBKDESCRIPTIONSWITCH ROTARY 4POS 250MA 125VLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEETIm MEDILLINCQF.pdfVOLTAGE RATING - DC28VVOLTAGE RATING - AC125VTERMINATION STALEPC PinSERIESMPARLEL COTOL DIMENSIONSCloular - 6.60mm DiaOPERATING FORCE2.880 ~ 5.011gfmNUMBER OF POSITIONS4NUMBER OF POSITIONS1MUMBER OF DECKS1MUMBER OF DECKS1MUMUFACTURER STATUS NEATUSLead free / RoHS CompliantINDEX STOPSFixedFEATURES1967 - Dust Tight, WaterproofFEATURES1967 - Dust Tight, WaterproofCOTTACT MATERIALCopper AlloyCONTACT TIMINGSilverCONTACT TIMINGSilverCONTACT TIMINGSilverCONTACT TIMINGSilverCONTACT TIMINGSilverCONTACT TIMINGSilverCONTACT TIMING <td></td> <td></td>		
DescriptionSWITCH ROTARY 4POS 250MA 125VLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEETDel free / RoHS CompliantVOLTAGE RATING - DC28VVOLTAGE RATING - AC125VTERMINATION STALEPC PinSERIESMPARLE LUTOUT DIMENSIONSCircular - 6.60mm DiaOPERATING FORCE2.880 ~ 5.041gfmNUMBER OF POSITIONS4NUMBER OF POLES PER DECX1NUMBER OF POSITIONS1MUMBER OF POSITIONS1NUMBER OF POSITIONRodar free / RoHS CompliantIDEX STOPSFixedFEATURES11.44mmCORTACT THINSSimar A(C/DC)CONTACT MINEN250mA (AC/DC)CONTACT THINSNon-Shorting (BBM)CONTACT THINSSilverCONTACT THINSHSilverCONTACT THINSHSilverCONTACT THINSHSilverCONTACT	PART NUMBER	ME04L1NCQF
LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEETIm MEOHLINCQF.pdfVOLTAGE RATING - DC28VVOLTAGE RATING - AC125VTERMINATION STYLEPC PinSERIESMPANEL CUTOUT DIMENSIONSGroular - 6.60mm DiaOPERATING FORCE2.880 ~ 5.041gfmNUMBER OF POSITIONS4NUMBER OF POSITIONS1NUMBER OF POSITION10MOUNTING TYPE10NUMBER OF POSITION10NUMER OF OF STATUS10LEAD FREE STATUS / ROHS STATUS10DOTATIONRotary Switch 4 P	MANUFACTURER	C&K
DATA SHEETRevellVOLTAGE RATING - DC28VVOLTAGE RATING - AC125VTERMINATION STYLEPC PinSERIESMPWHEL CUTOUT DIMENSIONSCircular - 6.60mm DiaOPERATING FORCE2.880 ~ 5.041gfmNUMBER OF POSITIONS4NUMBER OF POSITIONS1NUMBER OF POLIES PER DECK1NUMBER OF DECKS1MUNDER SUPPLEPanel Mount, Through HoleMOUNTING TYPEPanel Mount, Through HoleMOUNTING TYPE104 for CompliantMAUAFCTURER STANDARD LEAD TIME13 WeeksLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantINDER STOPSFixedFEATURESNOR-Shorting (BBM)CURRENT RATING250mA (AC/DC) 125VAC Panel Mount, Through HoleDEFTH LED ESCRIPTIONRotary Switch 4 Hostion SP4T 250mA (AC/DC) 125VAC Panel Mount, Through HoleDEFTH BEHIND PANEL1.44mmCURRENT RATINGSoma (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT TIMINGSilverCONTACT FINISHSilverCIRCUIT PER DECKSP4TANGLE OF THROW36°ACTUATOR TYPEFoltad (1.17mm Dia)	DESCRIPTION	SWITCH ROTARY 4POS 250MA 125V
VOLTAGE RATING - DC28VVOLTAGE RATING - AC12SVTERMINATION STYLEPC PinSERIESMPAREL CUTOUT DIMENSIONSCircular - 6.60mm DiaOPERATING FORCE2.880 ~ 5.041gfmNUMBER OF POSITIONS4NUMBER OF POSITIONS1NUMBER OF DOLES PER DECK1NUMBER OF DECKS1MOUNTING TYPEPanel Mount, Through HoleMOUNTING TYPE10 (Unlimited)MAUFACTURER STANDARD LEAD TIME13 WeeksLEAD FORSFixedFEATURESPFO7 - Dust Tight, WaterproofDETAILED DESCRIPTIONRotary Switch 4 Position SPAT 250mA (AC/DC) 125VAC Panel Mount, Through HoleDEPTH BEHIND PANEL144mmCURRENT RATINGSOm (AC/DC)CONTACT TIMINGSom (AC/DC)CONTACT TIMINGSilverCONTACT FINISHSilverCONTACT FINISHSilverCATUATOR TYPEPATEANGLE OF THROW38°ACTUATOR TYPEFined (3.17mm Dia)	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
VOLTAGE RATING - AC125VTERMINATION STYLEPC PinSERIESMPANEL CUTOUT DIMENSIONSCircular - 6.60mm DiaOPERATING FORCE2.880 ~ 5.041gfmNUMBER OF POSITIONS4NUMBER OF POLES PER DECK1NUMBER OF DECKS1NUMBER OF DECKS1MOUNTING TYPEPanel Mount, Through HoleMOUNTING TYPE1 (Unimited)MANUFACTURER STANDARD LEAD TIME13 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantIDEX STOPSFixedPETAILED DESCRIPTIONRotary Switch 4 Position SP4T 250mA (AC/DC) 125VAC Panel Mount, Through HoleDEFTA ILED DESCRIPTIONRotary Switch 4 Position SP4T 250mA (AC/DC) 125VAC Panel Mount, Through HoleCONTACT TIMING250mA (AC/DC)CONTACT TIMINGCorper AlloyCONTACT TIMINGSilverCONTACT FINISHSilverCONTACT FINISHSilverCAURLED T FROW36°ANGLE OF THROWFlatded (3.17mm Dia)ACTUATOR TYPEFlatded (3.17mm Dia)	DATA SHEET	m ME04L1NCQF.pdf
FERMINATION STYLEPC PinSERIESMPANEL CUTOUT DIMENSIONSGroular - 6.60mm DiaOPERATING FORCE2.880 ~ 5.041gfmNUMBER OF POSITIONS4NUMBER OF POLES PER DECK1NUMBER OF DECKS1NUMBER OF DECKS1MOUNTING TYPEPanel Mount, Through HoleMOUNTING TYPE10 Unlimited)MANUFACTURER STANDARD LEAD TIME13 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINDEX STOPSFixedPETALLED DESCRIPTIONRotary Switch 4 Position SP4T 250mA (AC/DC) L25VAC Panel Mount, Through HoleDEPTH BEHIND PANEL1.144mmCURRENT RATINGSOmA (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT FINISHSilverGROUTT PER DECKSP4TANGLE OF THROW36°ACTUATOR TYPEFated (3.17mm Dia)	VOLTAGE RATING - DC	28V
SERIESMPANEL CUTOUT DIMENSIONSCircular - 6.60mm DiaOPERATING FORCE2.880 ~ 5.041gfmNUMBER OF POSITIONS4NUMBER OF POLES PER DECK1NUMBER OF DECKS1MOUNTING TYPEPanel Mount, Through HoleMOINTING TYPE1 (Unlimited)MANUFACTURER STANDARD LEAD TIME1 SWeeksLEAD FREE STATUS / ROHS STATUSLed free / ROHS CompliantIDEX STOPSFixedFEATURES100471 (Mainted)DETAILED DESCRIPTIONRotary Switch 4 Position SP4T 250mA (AC/DC) 125VAC Panel Mount, Through HoleCURRENT RATING250mA (AC/DC)CONTACT TIMINGSilverCONTACT TIMINGCopper AlloyCONTACT MATERIALGoper AlloyCONTACT FINISHSilverCIRCUIT PER DECKSP4TANGLE OF THROW36°ACTUATOR TYPEFlatted (3.17mm Dia)	VOLTAGE RATING - AC	125V
PAREL CUTOUT DIMENSIONSCircular - 6.60mm DiaOPERATING FORCE2.880 ~ 5.041g/mNUMBER OF POSITIONS4NUMBER OF POLES PER DECK1NUMBER OF DECKS1MOUNTING TYPEPanel Mount, Through HoleMOUNTING TYPE1 (Unlimited)MANUFACTURER STANDARD LEAD TIME13 WeeksLEAD FREE STATUS / ROHS STATUSLed free / ROHS CompliantPEATURESPFADETAILED DESCRIPTIONRotary Switch 4 Position SP4T 250mA (AC/DC) 125VAC Panel Mount, Through HoleDETAILED DESCRIPTIONStoma CompliantCURRENT RATINGCOper AlloyCONTACT TIMINGSilverCONTACT MATERIALSilverCONTACT FINISHSilverCIRCUIT PER DECKSP4TANGLE OF THROWSilverCIRCUIT PER DECKSP4TANGLE OF THROWSilverCATUATOR TYPEBatted (3.17mm Dia)	TERMINATION STYLE	PC Pin
OPERATING FORCE2.880 ~ 5.041gfmNUMBER OF POSITIONS4NUMBER OF POLES PER DECK1NUMBER OF POLES PER DECK1NUMBER OF DECKS1MOUNTING TYPEPanel Mount, Through HoleMOUNTING TYPE1 (Unlimited)MANUFACTURER STANDARD LEAD TIME13 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINDEX STOPSFixedFEATURES1047 - Dust Tight, WaterproofDETAILED DESCRIPTIONRotary Switch 4 Position SPAT 250mA (AC/DC) 125VAC Panel Mount, Through HoleLEPTH BEHIND PANEL1.144mmCURRENT RATINGS0mA (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT TIMISHSilverCIRCUIT PER DECKSPATANGLE OF THROW36°ANGLE OF THROWFisted (3.17mm Dia)	SERIES	Μ
NUMBER OF POSITIONS4NUMBER OF POLES PER DECK1NUMBER OF POLES PER DECK1NUMBER OF DECKS1MOUNTING TYPEPanel Mount, Through HoleMOUNTING TYPE1 (Unlimited)MANUFACTURER STANDARD LEAD TIME13 VeeksLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantINDEX STOPSFixedFEATURES1967 - Dust Tight, WaterproofDETAILED DESCRIPTIONRotary Switch 4 Position SP4T 250mA (AC/DC) 125VAC Panel Mount, Through HoleDEPTH BEHIND PANEL1.1.44mmCURRENT RATINGSoma (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT TIMISHSilverCINTACT FINISHSilverCIRCUIT PER DECKSP4TANGLE OF THROW36°ANGLE OF TIMEFlatted (3.17mm Dia)	PANEL CUTOUT DIMENSIONS	Circular - 6.60mm Dia
NUMBER OF POLES PER DECK1NUMBER OF DECKS1MOUNTING TYPEPanel Mount, Through HoleMOINTING TYPE1 (Unlimited)MANUFACTURER STANDARD LEAD TIME13 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINDEX STOPSFixedFEATURES1967 - Dust Tight, WaterproofDETAILED DESCRIPTIONRotary Switch 4 Position SP4T 250mA (AC/DC) 125VAC Panel Mount, Through HoleCURRENT RATING250mA (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT FINISHSilverCIRCUIT PER DECKSP4TANGLE OF THROWBatted (3.17mm Dia)ATURDATOR TYPEHatted (3.17mm Dia)	OPERATING FORCE	2.880 ~ 5.041gfm
NUMBER OF DECKS1MOUNTING TYPEPanel Mount, Through HoleMOINTING TYPEI (Unlimited)MANUFACTURER SENSITIVITY LEVEL (MSL)I (Unlimited)MANUFACTURER STANDARD LEAD TIMEI3 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINDEX STOPSFixedFEATURESIP67 - Dust Tight, WaterproofDETAILED DESCRIPTIONRotary Switch 4 Position SP4T 250mA (AC/DC) 125VAC Panel Mount, Through HoleDEPTH BEHIND PANEL11.44mmCURRENT RATINGSOmA (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT FINISHSilverCIRCUIT PER DECKSP4TANGLE OF THROW36°ANGLE OF THROWFitted (3.17mm Dia)	NUMBER OF POSITIONS	4
MOUNTING TYPEPanel Mount, Through HoleMOUNTING TYPEPanel Mount, Through HoleMOINTING TYPE1 (Unlimited)MANUFACTURER STANDARD LEAD TIME13 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINDEX STOPSFixedFEATURES1P67 - Dust Tight, WaterproofDETAILED DESCRIPTIONRotary Switch 4 Position SP4T 250mA (AC/DC) 125VAC Panel Mount, Through HoleDEPTH BEHIND PANEL11.44mmCURRENT RATINGS0mA (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT FINISHSilverCIRCUIT PER DECKSP4TANGLE OF THROW36°ANGLE OF THROWFlatted (3.17mm Dia)	NUMBER OF POLES PER DECK	1
MOISTURE SENSITIVITY LEVEL (MSL)1 (Unimited)MANUFACTURER STANDARD LEAD TIME13 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINDEX STOPSFixedFEATURES167 - Dust Tight, WaterproofDETAILED DESCRIPTIONRotary Switch 4 Position SP4T 250mA (AC/DC) 125VAC Panel Mount, Through HoleDEPTH BEHIND PANEL11.44mmCURRENT RATINGS0mA (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT TIMISHSilverCIRCUIT PER DECKSP4TANGLE OF THROW36°ACTUATOR TYPEFlated (3.17mm Dia)	NUMBER OF DECKS	1
MANUFACTURER STANDARD LEAD TIME13 WeeksIAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINDEX STOPSFixedFRATURESP67 - Dust Tight, WaterproofDETAILED DESCRIPTIONRotary Switch 4 Position SP4T 250mA (AC/DC) 125VAC Panel Mount, Through HoleDEPTH BEHIND PANEL1.44mmCURRENT RATINGS0mA (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT FINISHSilverCIRCUIT PER DECKSP4TANGLE OF THROW36°ANGLE OF THROWFitted (3.17mm Dia)	MOUNTING TYPE	Panel Mount, Through Hole
LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINDEX STOPSFixedFEATURESIP67 - Dust Tight, WaterproofDETAILED DESCRIPTIONRotary Switch 4 Position SP4T 250mA (AC/DC) 125VAC Panel Mount, Through HoleDEPTH BEHIND PANEL11.44mmCURRENT RATING250mA (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT FINISHSilverCONTACT FINISHSilverANGLE OF THROW36°ACTUATOR TYPEFlated (3.17mm Dia)	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
INDEX STOPSFixedFEATURESIP67 - Dust Tight, WaterproofDETAILED DESCRIPTIONRotary Switch 4 Position SP4T 250mA (AC/DC) 125VAC Panel Mount, Through HoleDEPTH BEHIND PANEL1.44mmCURRENT RATING250mA (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT MATERIALCopper AlloyCONTACT FINISHSilverCIRCUIT PER DECKSP4TANGLE OF THROWSide (3.17mm Dia)	MANUFACTURER STANDARD LEAD TIME	13 Weeks
FEATURESIP67 - Dust Tight, WaterproofDETAILED DESCRIPTIONRotary Switch 4 Position SP4T 250mA (AC/DC) 125VAC Panel Mount, Through HoleDEPTH BEHIND PANEL11.44mmCURRENT RATING250mA (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT TINISHCopper AlloyCIRCUIT PER DECKSH4TANGLE OF THROW36°ACTUATOR TYPEFatted (3.17mm Dia)	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
DETAILED DESCRIPTIONRotary Switch 4 Position SP4T 250mA (AC/DC) 125VAC Panel Mount, Through HoleDEPTH BEHIND PANEL11.44mmCURRENT RATING250mA (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT MATERIALCopper AlloyCONTACT FINISHSilverCIRCUIT PER DECKSP4TANGLE OF THROWGo°ACTUATOR TYPEFilted (3.17mm Dia)	INDEX STOPS	Fixed
DEPTH BEHIND PANEL11.44mmCURRENT RATING250mA (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT MATERIALCopper AlloyCONTACT FINISHSilverCIRCUIT PER DECKSP4TANGLE OF THROWGo°ACTUATOR TYPEFlatted (3.17mm Dia)	FEATURES	IP67 - Dust Tight, Waterproof
CURRENT RATING250mA (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT MATERIALCopper AlloyCONTACT FINISHSilverCIRCUIT PER DECKSP4TANGLE OF THROW36°ACTUATOR TYPEFitted (3.17mm Dia)	DETAILED DESCRIPTION	Rotary Switch 4 Position SP4T 250mA (AC/DC) 125VAC Panel Mount, Through Hole
CONTACT TIMINGNon-Shorting (BBM)CONTACT MATERIALCopper AlloyCONTACT FINISHSilverCIRCUIT PER DECKSP4TANGLE OF THROW36°ACTUATOR TYPEFlated (3.17mm Dia)	DEPTH BEHIND PANEL	11.44mm
CONTACT MATERIAL Copper Alloy CONTACT FINISH Silver CIRCUIT PER DECK SP4T ANGLE OF THROW 36° ACTUATOR TYPE Flatted (3.17mm Dia)	CURRENT RATING	250mA (AC/DC)
CONTACT FINISHSilverCIRCUIT PER DECKSP4TANGLE OF THROW36°ACTUATOR TYPEFlatted (3.17mm Dia)	CONTACT TIMING	Non-Shorting (BBM)
CIRCUIT PER DECK SP4T ANGLE OF THROW 36° ACTUATOR TYPE Flatted (3.17mm Dia)	CONTACT MATERIAL	Copper Alloy
ANGLE OF THROW36°ACTUATOR TYPEFlatted (3.17mm Dia)	CONTACT FINISH	Silver
ACTUATOR TYPE Flatted (3.17mm Dia)	CIRCUIT PER DECK	SP4T
	ANGLE OF THROW	36°
ACTUATOR LENGTH 10.16mm	ACTUATOR TYPE	Flatted (3.17mm Dia)
	ACTUATOR LENGTH	10.16mm

Related Tags

C&K ME04L1NCQF	ME04L1NCQF Distributor	ME04L1NCQF Supplier
ME04L1NCQF Price	ME04L1NCQF Pictures	ME04L1NCQF Image
ME04L1NCQF PDF Datasheet	ME04L1NCQF Download Datasheet	ME04L1NCQF Datasheet
ME04L1NCQF Stock	Buy ME04L1NCQF	Buy C&K ME04L1NCQF
C&K ME04L1NCQF	C&K Supplier	C&K Distributor
C&K ME04L1NCQF	C&K Components ME04L1NCQF	

Related Products

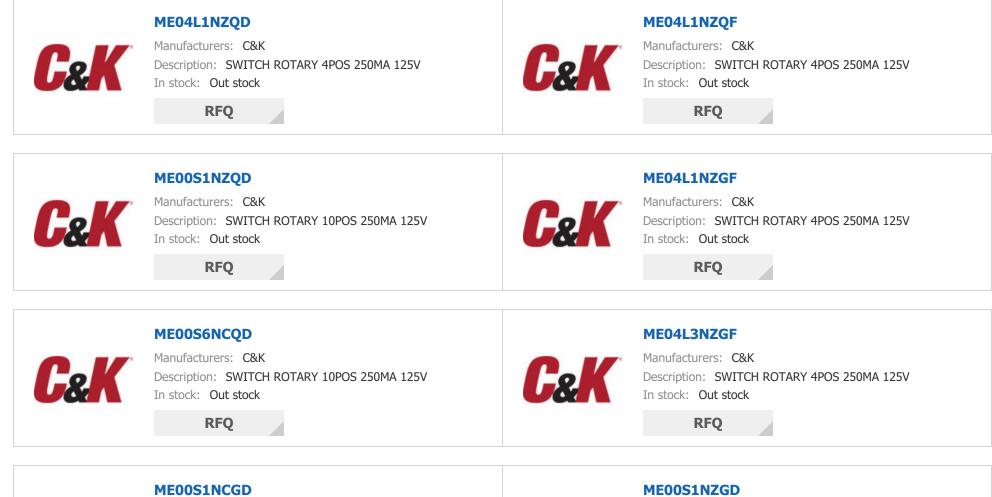

ME00S1NCGD



Manufacturers: C&K Description: SWITCH ROTARY 10POS 250MA 125V In stock: Out stock

RFQ



Manufacturers: C&K Description: SWITCH ROTARY 10POS 250MA 125V In stock: Out stock

RFQ

ME04S1NZQD ME04L3NCQD Manufacturers: C&K Manufacturers: C&K **G**&**K G**&K Description: SWITCH ROTARY 4POS 250MA 125V Description: SWITCH ROTARY 4POS 250MA 125V In stock: Out stock In stock: Out stock RFQ RFQ ME04L1NCQD ME00S6NCGD Manufacturers: C&K Manufacturers: C&K 68 68 Description: SWITCH ROTARY 4POS 250MA 125V Description: SWITCH ROTARY 10POS 250MA 125V In stock: Out stock In stock: Out stock RFQ RFQ

Copyright © 2020 Reliable Distributor of Electronic Components - Ocean-Components.com

E-mail: Info@Ocean-Components.com

Address: Room 2102, Connaught Commercial Building, 185 Wan Chai Rd, Wan Chai, Hong Kong

