
44MBS30-02B08N Details PDF



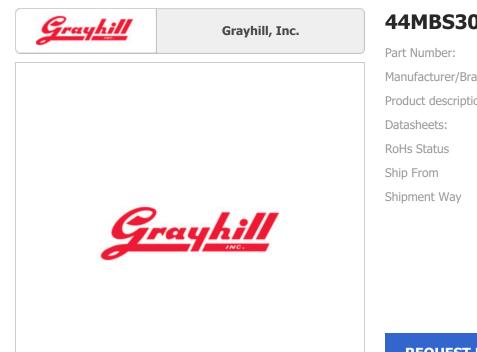

44MBS30-02B08N

art Number:	44MBS30-02B08N
anufacturer/Brand:	Grayhill, Inc.
roduct description	SWITCH ROTARY 85 DEG;C, GRND SHA
atasheets:	
oHs Status	KoHS Compliant
nip From	Hong Kong
nipment Way	DHL/Fedex/TNT/UPS/EMS

REQUEST FOR QUOTATION


Image may be representation. See specifications for product details.

PART NUMBER44MBS30-02808NMANUFACTURERGesyhul, Inc.DEGOLIPTIONSWITCH ROTARY 85 DEG;C, GRND SHALEAD FREE STATUS / ROHS STATUSSWITCH ROTARY 85 DEG;C, GRND SHADATA SHEETVOLTAGE RATING - OCVOLTAGE RATING - AC28/VOLTAGE RATING - AC15VTERMINATION STYLESolder LugSRIES44ROHS STATUSROHS CompliantPAREL CUTOUT DIMENSIONS-OPAREL CUTOUT DIMENSIONS8NUMBER OF PORET PORE5.761 ~ 83gfmNUMBER OF PORET PORE6NUMBER OF ROLES PER DECK1NUMBER OF ROLES PER DECK1NUMBER OF ROLES PER DECK9.841 And Panel ScaladIDETAILED DESCRIPTIONRotary Switch 8 Position SP8T 1A (AC/DC) 115VAC Panel MountDETAILED DESCRIPTIONSaft and Panel ScaladDETAILED DESCRIPTIONRotary Switch 8 Position SP8T 1A (AC/DC) 115VAC Panel MountDETAILED DESCRIPTIONSaft and Panel ScaladDETAILED DESCRIPTIONSaft and Panel ScaladCONTACT THAINGNon-Shorting (BBM)CONTACT THAINGSaft and Panel ScaladCONTACT THAINGSaft and Panel ScaladDETAILED DESCRIPTIONSaft and Panel ScaladCUTATE THING AND REALSaft and Panel ScaladCUTATE T		Specifications of 44MBS30-02B08N	
MANUFACTURERGrayhil, Inc.DESCRIPTIONSWITCH ROTARY 85 DEG;C, GRND SHALEAD FREE STATUS / ROHS STATUSRoHS ComplantDATA SHEET28VVOLTAGE RATING - DC28VVOLTAGE RATING - AC115VTERMINATION STYLESolder LugSKIETS44ROHS STATUSRoHS ComplantPANEL CUTOUT DIMENSIONS-OPERATING FORCE5.761 ~ 83gfmNUMBER OF POLES PER DECK1NUMBER OF POLES PER DECK5.761 ~ 83gfmMOURTING TYPEShalt and Panel ScaledIDEX STOPSFixedPAREL OF DECKS5.761 ~ 83gfmNUMBER OF DOLES DER DECK1INDUR STOPSFixedIDEX STOPSShalt and Panel ScaledIDEX STOPSShalt and Panel ScaledIDEX STOPS1CURRENT RATING1A(C/DC)IDEX TIPSShalt and Panel ScaledIDEX TIPSShalt and Panel ScaledIDEX TIPS1A(A/DC)C)IDEX TIPSShalt and Panel ScaledIDEX TIPSSha			
DESCRIPTIONSWITCH ROTARY 85 DEG;C, GRND SHALEAD FREE STATUS / ROHS STATUSRoHS CompliantDATA SHEET28/VoLTAGE RATING - DC28/VoLTAGE RATING - DC115/TERNINATION STYLESolder LugSERIES44ROHS STATUSRoHS CompliantPAREL CUTOUT DIMENSIONS-OPERATING FORCE5,761 ~ 83gfmNUMBER OF POLES PER DECK1NUMBER OF POLES PER DECK1NUMBER OF DECKS-MOUNTING TYPEPanel MountIDEX STOPSFixedPATELED DECKShaft and Panel SealedDETAILED DESCRIPTIONRotary Switch & Position SP&TI 1A (AC/DC) 115/VAC Panel MountIDER ATINGIA (AC/DC)CURRENT RATINGIA (AC/DC)CURRENT RATINGSilver AlloyCONTACT TIMINGSilver AlloyCONTACT TIMINGSilver AlloyCONTACT FINISHSilver AlloyCONTACT FINISHSilver AlloyAGGLE OF THROWSP#TAGGLE OF THROW30P	PART NUMBER	44MBS30-02B08N	
LEAD FREE STATUS / ROHS STATUSRoHS CompliantDATA SHEETVOLTAGE RATING - DC28VVOLTAGE RATING - AC15VTERMINATION STYLESolder LugSERIES44ROHS STATUSROHS CompliantPANEL CUTOUT DIMENSIONS-OPERATING FORCE5.761 ~ 83gfmNUMBER OF POSITIONS8NUMBER OF POLES PER DECK1NUMBER OF DECKS-NUMBER OF DECKS-NUMBER OF DECKSFaxelPAREL CUTOUT DIMENSIONS-DETAILED DESCRIPTIONRotary Switch 8 Position SP8T LA (AC/DC) LISVAC Panel MountIDEX STOPS-CURRENT RATINGA(AC/DC)CURRENT RATINGSilver AlloyCONTACT TIMINGNon-Shorting (BBM)CONTACT FINISH-CONTACT FINISH-CURCUT PER DECKSP8TANGLE OF THROWSilver AlloyCONTACT FINISH-CONTACT FINISH <td>MANUFACTURER</td> <td>Grayhill, Inc.</td>	MANUFACTURER	Grayhill, Inc.	
DATA SHEETVOLTAGE RATING - DC28VVOLTAGE RATING - AC115VTERMINATION STYLESolder LugSERIES44ROHS STATUSROHS CompliantPANEL CUTOUT DIMENSIONS-OPERATING FORCE5.761 ~ 83gfmNUMBER OF POSITIONS8NUMBER OF POLES PER DECK1NUMBER OF DECKS-NUMBER OF DECKShaft and Panel ScaledIDETAILED DESCRIPTIONRotary Switch & Position SPBT 1A (AC/DC) 115VAC Panel MountDETAILED DESCRIPTION-CUTRENT RATING-CUTRENT RATING-CUTRENT RATINGSilver AllonCONTACT TIMINGNon-Shorting (BBM)CONTACT TIMING-CONTACT	DESCRIPTION	SWITCH ROTARY 85 DEG;C, GRND SHA	
VOLTAGE RATING - DC28VVOLTAGE RATING - AC115VTERMINATION STYLESolder LugSERIES44ROHS STATUSROHS CompliantPANEL CUTOUT DIMENSIONS-OPERATING FORCE5.761 ~ 83gfmNUMBER OF POSITIONS8NUMBER OF POLES PER DECK1NUMBER OF DECKS-MUNDER OF DECKPanel MountINDEX STOPSFixedFATURESShaft and Panel SealedDETAILED DESCRIPTION-CURRENT RATINGNOn-Shorting (BBM)CURRENT RATINGNon-Shorting (BBM)CONTACT TIMING-CONTACT FINISH-CONTACT	LEAD FREE STATUS / ROHS STATUS	RoHS Compliant	
VOLTAGE RATING - AC115VTERMINATION STYLESolder LugSERIES44ROHS STATUSROHS CompliantPANEL CUTOUT DIMENSIONS-OPERATING FORCE5.761 ~ 83gfmNUMBER OF POSITIONS8NUMBER OF POLES PER DECK1NUMBER OF DECKS-NUMBER OF DECKS-NUMBER OF DECKSFixedNUMBER OF DECKSFixedINDEX STOPSFixedFEATURESShaft and Panel SealedDEFTA LED DESCRIPTIONAlory Switch 8 Position SP8T 1A (AC/DC) 115VAC Panel MountCURRENT RATINGIA(C/DC)CONTACT TIMINGSilver AlloyCONTACT TIMINGSilver AlloyCONTACT TIMING-CONTACT TIMINGSilver AlloyCONTACT FINISH-CONTACT FINISH-<	DATA SHEET		
TERMINATION STYLESolder LugSERIES44ROHS STATUSROHS CompliantPANEL CUTOUT DIMENSIONS-OPERATING FORCE5.761 ~ 83gfmNUMBER OF POSITIONS8NUMBER OF POLES PER DECK1NUMBER OF DECKS-MUNTING TYPEPanel MountINDEX STOPSFixedPEATURESShaft and Panel SealedDETAILED DESCRIPTIONNotary Switch 8 Position SP8T 1A (AC/DC) 115VAC Panel MountDEFTA IELIND PANEL-CURRENT RATINGIA (AC/DC)CONTACT TIMINGSilver AlloyCONTACT FINISH-CICULT PER DECKSP8TANGLE OF THROW30°	VOLTAGE RATING - DC	28V	
SERIES44ROHS STATUSROHS CompliantPANEL CUTOUT DIMENSIONS-OPERATING FORCE5.761 ~ 83gfmNUMBER OF POSITIONS8NUMBER OF POLES PER DECK1NUMBER OF DECKS-MOUNTING TYPEPanel MountINDEX STOPSShaft and Panel SealedPETALED DESCRIPTIONRotary Switch 8 Position SPBT 1A (AC/DC) 115VAC Panel MountDEPTH BEHIND PANEL-CURRENT RATINGIA(AC/DC)CONTACT TIMINGSilver AlloyCONTACT FINISH-CICUIT PER DECKSPBTANGLE OF THROWS0°	VOLTAGE RATING - AC	115V	
ROHS STATUSRoHS CompliantPANEL CUTOUT DIMENSIONS-OPERATING FORCE5.761 ~ 83gfmNUMBER OF POSITIONS8NUMBER OF POLES PER DECK1NUMBER OF DECKS-MOUNTING TYPEPanel MountINDEX STOPSFixedFEATURESShaft and Panel SealedDETAILED DESCRIPTIONACary Switch 8 Position SP8T 1A (AC/DC) 115VAC Panel MountDETAILED DESCRIPTIONACAY/DC)CURRENT RATING1A (AC/DC)CURRENT RATINGSilver AlloyCONTACT TIMINGSilver AlloyCONTACT FINISH-CIRCUIT PER DECKSP8TANGLE OF THROW30°	TERMINATION STYLE	Solder Lug	
PANEL CUTOUT DIMENSIONS-PANEL CUTOUT DIMENSIONS5.761 ~ 83gfmNUMBER OF POSITIONS8NUMBER OF POLES PER DECK1NUMBER OF DECKS-MOUNTING TYPEPanel MountINDEX STOPSFixedFEATURESShaft and Panel SealedDETAILED DESCRIPTIONRotary Switch & Position SP&T 1A (AC/DC) 115VAC Panel MountDEFTA BEINID PANEL-CURRENT RATINGIA (AC/DC)CONTACT TIMINGSilver AlloyCONTACT FINISH-CIRCUIT PER DECKSP&TANGLE OF THROW30°	SERIES	44	
OPERATING FORCE5.761 ~ 83gfmNUMBER OF POSITIONS8NUMBER OF POLES PER DECK1NUMBER OF DECKS-MOUNTING TYPEPanel MountINDEX STOPSFixedFEATURESShaft and Panel SealedDETAILED DESCRIPTIONRotary Switch 8 Position SP8T 1A (AC/DC) 115VAC Panel MountDEPTH BEHIND PANEL-CURRENT RATINGNon-Shorting (BBM)CONTACT TIMINGSiver AlloyCONTACT FINISH-CIRCUIT PER DECKSP8TANGLE OF THROW30°	ROHS STATUS	RoHS Compliant	
NUMBER OF POSITIONS8NUMBER OF POLES PER DECK1NUMBER OF DECKS-NUMBER OF DECKS-MOUNTING TYPEPanel MountINDEX STOPSFixedFEATURESShaft and Panel SealedDETAILED DESCRIPTIONRotary Switch 8 Position SP8T 1A (AC/DC) 115VAC Panel MountDEPTH BEHIND PANEL-CURRENT RATINGIA (AC/DC)CONTACT TIMINGSilver AlloyCONTACT FINISH-CONTACT FINISH-CIRCUIT PER DECKSP8TANGLE OF THROW30°	PANEL CUTOUT DIMENSIONS	-	
NUMBER OF POLES PER DECK1NUMBER OF DECKS-MOUNTING TYPEPanel MountINDEX STOPSFixedFEATURESShaft and Panel SealedDETAILED DESCRIPTIONRotary Switch 8 Position SP8T 1A (AC/DC) 115VAC Panel MountDEPTH BEHIND PANEL-CURRENT RATINGNon-Shorting (BBM)CONTACT TIMINGSilver AlloyCONTACT FINISH-CIRCUIT PER DECKSP8TANGLE OF THROW30°	OPERATING FORCE	5.761 ~ 83gfm	
NUMBER OF DECKS-MOUNTING TYPEPanel MountINDEX STOPSFixedFEATURESShaft and Panel SealedDETAILED DESCRIPTIONRotary Switch & Position SPBT 1A (AC/DC) 115VAC Panel MountDEPTH BEHIND PANEL-CURRENT RATINGIA (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT FINISH-CIRCUIT PER DECKSPBTANGLE OF THROW30°	NUMBER OF POSITIONS	8	
MOUNTING TYPEPanel MountINDEX STOPSFixedFEATURESShaft and Panel SealedDETAILED DESCRIPTIONRotary Switch 8 Position SP8T 1A (AC/DC) 115VAC Panel MountDEPTH BEHIND PANEL-CURRENT RATING1A (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT FINISH-CIRCUIT PER DECKSP8TAngle OF THROW30°	NUMBER OF POLES PER DECK	1	
INDEX STOPSFixedFEATURESShaft and Panel SealedDETAILED DESCRIPTIONRotary Switch 8 Position SP8T 1A (AC/DC) 115VAC Panel MountDEPTH BEHIND PANEL-CURRENT RATINGA(A/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT FINISH-CONTACT FINISH-CIRCUIT PER DECKSP8TANGLE OF THROW30°	NUMBER OF DECKS	-	
FEATURESShaft and Panel SealedDETAILED DESCRIPTIONRotary Switch 8 Position SP8T 1A (AC/DC) 115VAC Panel MountDEPTH BEHIND PANEL-CURRENT RATING1A (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT FINISH-CONTACT FINISH-CIRCUIT PER DECKSP8TANGLE OF THROW30°	MOUNTING TYPE	Panel Mount	
DETAILED DESCRIPTIONRotary Switch 8 Position SP8T 1A (AC/DC) 115VAC Panel MountDEPTH BEHIND PANEL-CURRENT RATING1A (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT MATERIALSilver AlloyCONTACT FINISH-CIRCUIT PER DECKSP8TANGLE OF THROW30°	INDEX STOPS	Fixed	
DEPTH BEHIND PANEL-CURRENT RATING1A (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT MATERIALSilver AlloyCONTACT FINISH-CIRCUIT PER DECKSP8TANGLE OF THROW30°	FEATURES	Shaft and Panel Sealed	
CURRENT RATING1A (AC/DC)CONTACT TIMINGNon-Shorting (BBM)CONTACT MATERIALSilver AlloyCONTACT FINISH-CIRCUIT PER DECKSP8TANGLE OF THROW30°	DETAILED DESCRIPTION	Rotary Switch 8 Position SP8T 1A (AC/DC) 115VAC Panel Mount	
CONTACT TIMINGNon-Shorting (BBM)CONTACT MATERIALSilver AlloyCONTACT FINISH-CIRCUIT PER DECKSP8TANGLE OF THROW30°	DEPTH BEHIND PANEL	-	
CONTACT MATERIAL Silver Alloy CONTACT FINISH - CIRCUIT PER DECK SP8T ANGLE OF THROW 30°	CURRENT RATING	1A (AC/DC)	
CONTACT FINISH-CIRCUIT PER DECKSP8TANGLE OF THROW30°	CONTACT TIMING	Non-Shorting (BBM)	
CIRCUIT PER DECK SP8T ANGLE OF THROW 30°	CONTACT MATERIAL	Silver Alloy	
ANGLE OF THROW 30°	CONTACT FINISH		
	CIRCUIT PER DECK	SP8T	
ACTUATOR TYPE Flatted (6.35mm Dia)	ANGLE OF THROW	30°	
	ACTUATOR TYPE	Flatted (6.35mm Dia)	
ACTUATOR LENGTH 11.10mm	ACTUATOR LENGTH	11.10mm	

Related Tags

Grayhill, Inc. 44MBS30-02B08N	44MBS30-02B08N Distributor	44MBS30-02B08N Supplier
44MBS30-02B08N Price	44MBS30-02B08N Pictures	44MBS30-02B08N Image
44MBS30-02B08N PDF Datasheet	44MBS30-02B08N Download Datasheet	44MBS30-02B08N Datasheet
44MBS30-02B08N Stock	Buy 44MBS30-02B08N	Buy Grayhill, Inc. 44MBS30-02B08N
Grayhill, Inc. 44MBS30-02B08N	Grayhill, Inc. Supplier	Grayhill, Inc. Distributor
Grayhill, Inc. 44MBS30-02B08N	Grayhill Inc. 44MBS30-02B08N	

Related Products

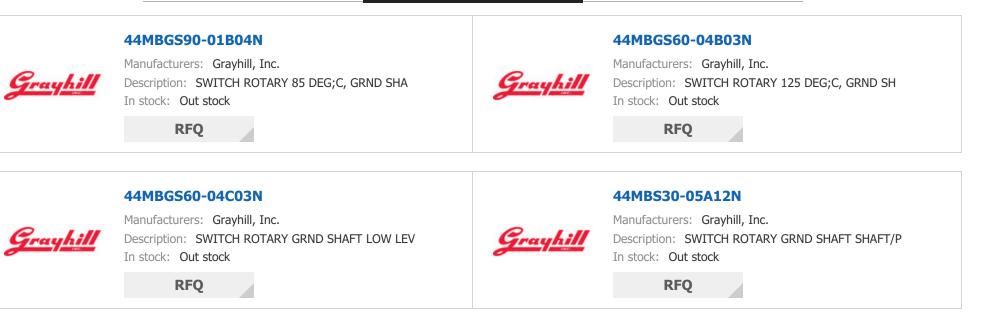



44MBS30-02B04S

Manufacturers: Grayhill, Inc. Description: SWITCH ROTARY 85 DEG;C, GRND SHA In stock: Out stock

RFQ



Manufacturers: Grayhill, Inc. Description: SWITCH ROTARY GRND SHAFT SHAFT/P In stock: Out stock

RFQ

44MBS30-04A12N

44MBS30-08D04N

44MBS30-02B09S



Manufacturers: Grayhill, Inc. Description: SWITCH ROTARY 85 DEG;C, GRND SHA In stock: Out stock



Manufacturers: Grayhill, Inc. Description: SWITCH ROTARY GRND SHAFT SHAFT/P In stock: Out stock



44MBS30-02C06N

44MBS30-01B04S



Grayhill

Manufacturers: Grayhill, Inc. Description: SWITCH ROTARY GRND SHAFT SHAFT/P In stock: Out stock

Description: SWITCH ROTARY 125 DEG;C, GRND SH

RFQ

44MBGS45-06A08N

In stock: Out stock

RFQ

Manufacturers: Grayhill, Inc.



Grayhill

Manufacturers: Grayhill, Inc. Description: SWITCH ROTARY 85 DEG;C, GRND SHA In stock: Out stock

RFQ

44MBS45-01B08N

Manufacturers: Grayhill, Inc. Description: SWITCH ROTARY 85 DEG;C, GRND SHA In stock: Out stock

RFQ

Copyright @ 2020 Reliable Distributor of Electronic Components - Ocean-Components.com

E-mail: Info@Ocean-Components.com

Address: Room 2102, Connaught Commercial Building, 185 Wan Chai Rd, Wan Chai, Hong Kong

