


Image may be representation. See specifications for product details.


	Specifications of KO129LA126
PART NUMBER	KO129LA126
MANUFACTURER	E-Switch
DESCRIPTION	SWITCH KEYLOCK 3POS SP3T 4A 125V
LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
DATA SHEET	1.KO129LA126.pdf 2.KO129LA126.pdf
VOLTAGE RATING - AC	125V
TERMINATION STYLE	Solder Lug
SWITCH FUNCTION	Mom-On-On
SERIES	KO
PANEL CUTOUT DIMENSIONS	Circular - 19.00mm Dia
OPERATING TEMPERATURE	-
NUMBER OF POSITIONS	3
MOUNTING TYPE	Panel Mount
MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
MECHANICAL LIFE	-
MANUFACTURER STANDARD LEAD TIME	10 Weeks
LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
KEY REMOVABLE POSITIONS	3 only
FEATURES	-
ELECTRICAL LIFE	-
DETAILED DESCRIPTION	Keylock Switch 3 Position SP3T 4A (AC) 125VAC Panel Mount
DEPTH BEHIND FLANGE	33.70mm
CURRENT RATING	4A (AC)
CONTACT TIMING	Not Specified
CONTACT MATERIAL	Copper Alloy
CONTACT FINISH	Silver
CIRCUIT	SP3T
ANGLE OF THROW	45°
ACTUATOR TYPE	Flat Key


REQUEST FOR QUOTATION

Related Tags

E-Switch KO129LA126	KO129LA126 Distributor	KO129LA126 Supplier
KO129LA126 Price	KO129LA126 Pictures	KO129LA126 Image
KO129LA126 PDF Datasheet	KO129LA126 Download Datasheet	KO129LA126 Datasheet
KO129LA126 Stock	Buy KO129LA126	Buy E-Switch KO129LA126
E-Switch KO129LA126	E-Switch Supplier	E-Switch Distributor
E-Switch KO129LA126		

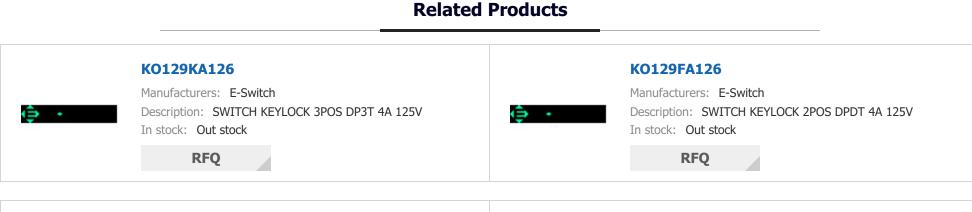

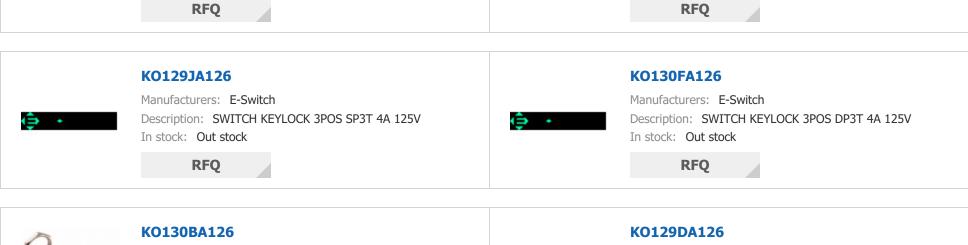

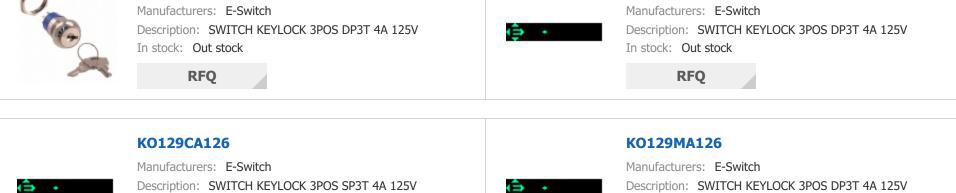





In stock: Out stock

RFQ







In stock: Out stock

RFQ







