

<b>(</b>	E-Switch
¢	•

Image may be representation. See specifications for

product details.

## 200BWMSP1T2A1SM6RE

Part Number:	200BWMSP1T2A1SM6RE
Manufacturer/Brand:	E-Switch
Product description	SWITCH TOGGLE SPDT 0.4VA 20V
Datasheets:	DOBWMSP1T2A1SM6RE.pdf
RoHs Status	💒 Lead free / RoHS Compliant
Ship From	Hong Kong
Shipment Way	DHL/Fedex/TNT/UPS/EMS

**REQUEST FOR QUOTATION** 


Specifications of 200BWMSP1T2A1SM6RE


VoltAGE RATING - AC2vTERMINATION STYLEGI/UNGSWICH FUNCTIONOn-OnSWICH FUNCTION00SREES208PARL CUTOUT DIMENSIONS-PACKAGINGSKOTHER NAMESSKOTHER NAMES-OPGRATING TEMPERATURE-MOUNTING TYPE-MOUNTING TYPESKMOUNTING TYPE-MAUFACTURER STANDARD LEAD TIME-ILAD FREE STATUS / ROHS STATUS-ILAD FREE STATUS / ROHS STATUS-ILAD FREE STATUS / ROHS STATUS-ILUMINATION VOLTAGE (NOMINAL)-ILUMINATION TYPE, COLOR-ILUMINATION TYPE, COLOR-	PART NUMBER	200BWMSP1T2A1SM6RE
Leap FREE STATUS / ROHS STATUS     Lead free / ROHS Compliant       DATA SHEET     GOOWMSPITALISMORE.pdf       VOLTAGE RATING - AC     20V       VOLTAGE RATING - AC     OV       SWITCH FUNCTION     GUI Wing       SWITCH FUNCTION     GuI Wing       SWITCH FUNCTION     On-On       SREPS     OBD       AVACAGING     Selection       ACXAGING     Selection       OPERATING TEMPERATURE     OBD       AVACAGING     Selection       MOUNTOTYPE     Selection       NOUNTOTYPE     Gene Mount, Right Angle       MOUNTOTYPE     Velocien       ILLUMINATION YOLTAGE (NOTINIAL)     ILLUMINATION YOLTAGE (NOTINIAL)       ILLUMINATION YOLTAGE (NOTINIAL)     INFOLOCIENCIENCIENCIENCIENCIENCIENCIENCIENCIEN	MANUFACTURER	E-Switch
DATA SHEET© 2000MMSP172/SMGRE, pdfVOLTAGE RATING - DC2VVOLTAGE RATING - ACGNU MINGSTATE ALGNU MINGSMICH FUNCTIONOn-OnSREES2006PAREL CUTOUT DIMENSIONS-PACKAGINGBukOTHER MARES30°C ~ 85°CMOUTTING TYPESUFGRE MOUNT, Bujk AngleMOUTTING TYPESUFGRE MOUNT, Bujk AngleMOUNTING TYPESUFGRE MOUNT, Bujk AngleMUNDATION TOUTAGE (NOMINAL)100 FORMER MOUNT, BUJK ANGLEILLUMINATION VOLTAGE (NOMINAL)SOF SUFGRE MOUNT, BUJK ANGLEILLUMINATION VOLTAGE (NOMINAL)SOF SUFGRE MOUNT, BUJK ANGLEILLUMINATION TYPE, COLORSOJO SUFGRE MOUNT, BUJK ANGLEILLUMINATION VOLTAGE (NOMINAL)SOLOR SUFGRE MOUNT, BUJK ANGLEILLUMINATION TYPE, COLORSOJO SUFGRE MOUNT, BUJK ANGLEILLUMINATIONSUFGRE MOUNT, BUJK ANGLE <td>DESCRIPTION</td> <td>SWITCH TOGGLE SPDT 0.4VA 20V</td>	DESCRIPTION	SWITCH TOGGLE SPDT 0.4VA 20V
NOTAGE RATING - DCNOVOLTAGE RATING - ACSVVOLTAGE RATING - ACGU WigSERLISGU MGSWITCH FUNCTIONOn-OnSERLIS2008PAREL CUTOUT DIMENSIONS-PACCAGINGBukOTHER NAMESGS24901OTHER NAMESSUTGE MOUNTING TYPEMOUNTING TYPESUTGE MOUNT RIGHT MERGAUNCEMOUNTING TYPESUTGE MOUNT RIGHT MERGAUNCEMOUNTING TYPESUTGE MOUNT RIGHT MERGAUNCEMAUFACTURER STANDARD LEAD TIMESUTGE COMPILATIONLEAD FREE STATUS / RONES STATUSLead Free / RoHS CompilantLILUMINATION YOLTAGE (MOMINAL)-LILUMINATION YDE, COLORJOO CyclesLILUMINATION YDE, COLORSUGO SUGAI GUTIMINALILILUMINATION YDE, COLORSUGO SUGAI GUTIMINALILECTETICAL LIFESUGO SUGAI GUTIMINALICURRENT RATINGSUGO SUGAI GUTIMINALICURRENT RATINGSUGAI SUGAI GUTIMINALICURRENT RATINGSUGAI SUGAI	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
Volträde RatTink - AC20VTRRINATION STYLEGil WigSWITCH FUNCTIONGn-OnSWITCH FUNCTION0-OnSPAREL GUTOUT DIMENSIONS-PAREL GUTOUT DIMENSIONSGliOTHER NAMESBilOTHER NAMESSG*G*G*G*G*G*G*G*G*G*G*G*G*G*G*G*G*G*G*	DATA SHEET	200BWMSP1T2A1SM6RE.pdf
TERMINATION STYLEGullWingSWITCH FUNCTION0-0-0SERIES200PAREL CUTOUT DIMENSIONS-PAREL CUTOUT DIMENSIONSSuffaceOrtHER NAMESSuffaceOTHER NAMESSuffaceOPERATING TEMPERATURESufface Mount, Right AngleMOUNTING TYPEI (Unimited)MOUTCHER STANDARD LEAD TIMEVeckesINAUPACTURES STANDARD LEAD TIMEVeckesLIAD FREE STATUS / ROHS STATUSI (Unimited)ILULININATION VOLTAGE (NOMINAL)-ILULININATION VOLTAGE (NOMINAL)-ILULININATION TYPE, COLORSufface Mount, Right AngleILULININATION TYPE, COLORI (SUG SUG SUG SUG SUG SUG SUG SUG SUG SUG	VOLTAGE RATING - DC	20V
Autor Functionon-OSPITCH FUNCTION00PARLE CUTOUT DIMENSIONS0PACKAGINGBukOTHER NAMES30°C %5°COPERATING TEMPERATURE00°C %5°CMOUTING TYPE01/Gen/Gen/Gen/Gen/Gen/Gen/Gen/Gen/Gen/Gen	VOLTAGE RATING - AC	20V
SRIES008PANEL CUTOUT DIMENSIONS-PACKAGINGSKACHAGINGPACKAGINGSKACHAGINGOTHER NAMESSKACHAGINGOPERATING TEMPERATURE-MOUTING TYPEGrafe Mount, Right AngleMOUTING TYPEUnlimited)MOUTING TYPE STANDARD LEAD TIME9 WeeksLEAD FREE STATUS / ROHS STATUSIcd free / RoHS CompliantILUMINATION VOLTAGE (NOMINAL)-ILUMINATION TYPE, COLOR-ILUMINATION TYPE, COLOR-ILUMINATION TYPE, COLORSKOSCHOELINGLINGILUMINATION TYPE, COLORSKOSCHOELINGLINGLINGLINGLINGLINGLINGLINGLINGLING	TERMINATION STYLE	Gull Wing
PARLEL CUTOUT DIMENSIONS-PACKAGINGBulkOTHER NAMESG52459OTHER NAMES- 30°C ~ 85°CMOUNTING TYPESuface Mount, Right AngleMOUNTING TYPE1 (Inlinted)MAUJFACTURER STANDARD LEAD TIME9 WeeksLEAD FREE STATUS / ROHS STATUSKoffer / ROHS CompliantILUMINATION VOLTAGE (NOMINAL)-ILUMINATION VOLTAGE (NOMINAL)-ILUMINATION TYPE, COLOR-ILUMINATION TYPE, COLORNON CybesILUMINATION TYPE, COLOR-ILUMINATION TYPE, COLORNON CybesILUMINATION TYPE, COLOR-ILUMINATION TYPE, COLOR	SWITCH FUNCTION	On-On
PACKAGINGBuikOTHER NAMESG2469 R33017OPERATING TEMPERATURE-30°C ~ 85°CMOUNTING TYPESurface Mount, Right AngleMOUNTING TYPE(Unimited)MOUNTING TYPE9 WeeksLEAD FREE STATUS / ROHS STATUSEdd fre/ ROHS CompliantINGRESS PROTECTIONF0°- Dust Tight, WaterprofILUMINATION YOLTAGE (NOMINAL)-ILUMINATION YOLTAGE (NOMINAL)-ILUMINATION TYPE, COLORG000 CyclesILUMINATIONSoyoo CyclesILUMINATIONSigle Switch SPDT Surface Mount, Right AngleICURENT RATINGG000 CyclesICURENT RATINGSPCCURRENT RATINGSPCSURING THREADSPCSURING THREADSPCSURING THREADSPCSURING THREADSPCACTUATOR TYPESachard RoundACTUATOR TYPESachard RoundACTUATOR MATERIALSachard Round	SERIES	200B
oTHER NAMESE2469 S33017OPERATING TEMPERATURE-30°C × 35°CMOUNTING TYPESurace Mount, Right AngleMOUNTING TYPE1 (Ulinited)MANUFACTURER STANDARD LEAD TIME9 WeeksLEAD FREE STATUS / ROHS STATUSIed fre / ROHS CompliantINGRESS PROTECTIONP67 - Dust Tight WaterproofILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLORP60 - Dust Sight AngleILLUMINATION-ILLUMINATIONSolog Seled TerminalsIECTRICAL LIFESolog CodesICRRENT FATINGOlog Switch SPDT Surface Mount, Right AngleICRRENT RATINGSolog Seled TerminalsICRRENT RATINGSolog Seled T	PANEL CUTOUT DIMENSIONS	-
Differ Names     Tasso17       OPERATING TEMPERATURE     -30°C ~ 85°C       MOUNTING TYPE     Surface Mount, Right Angle       MOISTURE SENSITIVITY LEVEL (MSL)     1 (Unlimited)       MANUFACTURER STANDARD LEAD TIME     9 Weeks       LEAD FREE STATUS / ROHS STATUS     Lead free / RoHS Compliant       ILUMINATION VOLTAGE (NOMINAL)     -       ILLUMINATION TYPE, COLOR     -       FEATURES     Fory Sealed Terminals       ELECTRICAL LIFE     S000 Cycles       DETAILED DESCRIPTION     Guyes Sevich SPDT Surface Mount, Right Angle       CURRENT RATING     SUPS       BUSHING THREAD     SUPS       CURRENT RATING     SUPS       SUBLING THREAD     SUPS       CURRENT RATING     SUPS       SUPS     SUPS       SUPS     SUPS       CURATOR TYPE     Subard Round, Right Angle       SUPS     SUPS	PACKAGING	Bulk
MOUNTING TYPESurface Mount, Right AngleMOUNTING TYPE1 (Inited)MOUNTING TYPE1 (Inited)MOUNTING TYPE STATUS9 VeeksLEAD FREE STATUS / ROHS STATUSIcal free / RoHS CompliantINGRESS PROTECTIONFOF Dust Tight, WaterprofILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATION TYPE, COLORFOR SUBAICFEATURESFOR SUBAICILLUMINATION-FEATURESSub Sub Sub Sub Sub Sub Sub Sub Sub Sub	OTHER NAMES	
MOISTURE SENSITIVITY LEVEL (MSL) IUlimited IUlimited IUlimited IUlimited IUlimited IVERS ILAD FREE STATUS / ROHS STATUS IEAD FREE STATUS / ROHS STATUS IEAD FREE STATUS / ROHS STATUS ILUMINATION VOLTAGE (NOMINAL) IP67 - Dust Tight, Waterproof ILUMINATION VOLTAGE (NOMINAL) IOU ILUMINATION TYPE, COLOR ILUMINATION TYPE, COLOR ILUMINATION FEATURES IECTRICAL LIFE SOUS Sealed Terminals IECTRICAL LIFE SOUS Cycles ICAUF CIRRENT RATING IOU Cycles IULINIATION	OPERATING TEMPERATURE	-30°C ~ 85°C
MANUFACTURER STANDARD LEAD TIME9 WeeksLEAD FREE STATUS / ROHS STATUSLed free / ROHS CompliantINGRESS PROTECTIONF67 - Dust Tight, WaterproofILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATION TYPE, COLORNo-IlluminatedFEATURESFoxy Sealed TerminalsELECTRICAL LIFES000 CyclesCURRENT RATING-CURRENT RATINGOHA (AC/DC)ELGRUITSUMBUSHING THREADUntreadedACTUATOR TYPESmallACTUATOR TYPESmallACTUATOR TYPESmallACTUATOR MATERIALSmallACTUATOR MATERIALSmall	MOUNTING TYPE	Surface Mount, Right Angle
LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantINGRESS PROTECTION1667 - Dust Tight, WaterproofILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATIONNon-IlluminatedILLUMINATIONKoy Seled TerminalsELECTRICAL LIFE5000 CyclesDETAILED DESCRIPTION04VA (AC/DC)CIRRENT RATINGNon-IlluminatedBUSHING THREADTogle Switch SPDT Surface Mount, Right AngleBUSHING THREAD04VA (AC/DC)ACTUATOR TYPESnodard RoundACTUATOR TYPESnodard RoundACTUATOR TYPESnodard RoundACTUATOR TAREIALBas, Chrome Plated	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
INGRESS PROTECTIONIPG - Dust Tight, WaterprofILLUMINATION VOLTAGE (NOMINAL)-ILLUMINATION TYPE, COLOR-ILLUMINATIONNo-IlluminatedILLUMINATIONKonstandFEATURESKonstandFEATURESSolo CyclesILLECTRICAL LIFE0,400 CyclesCURRENT RATING0,400 CyclesCURRENT RATINGSolo CyclesCURRENT RATINGSolo CyclesBUSHING THREADNot MacAdemondACTUATOR TYPEChiraded ConstantionACTUATOR TYPESindar RoundACTUATOR TYPEBase, Chirade MacAdemondACTUATOR MATERIALBase, Chirade MacAdemond	MANUFACTURER STANDARD LEAD TIME	9 Weeks
ILLUMINATION VOLTAGE (NOMINAL)   -     ILLUMINATION TYPE, COLOR   -     ILLUMINATION TYPE, COLOR   Non-Illuminated     ILLUMINATION TYPE, COLOR   Kon-Illuminated     ILLUMINATION TYPE, COLOR   Foxy Sealed Terminals     ELECTRICAL LIFE   S0,000 Cycles     DETAILED DESCRIPTION   Togle Switch SPDT Surface Mount, Right Angle     CURRENT RATING   0.4VA (AC/DC)     CIRCUIT   SPDT     BUSHING THREAD   Unthreaded     ACTUATOR TYPE   Standar Round     ACTUATOR TYPE   Standar Round	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ILLUMINATION TYPE, COLOR-ILLUMINATIONKon/IluminatedFLATURESFoxy Sealed TerminalsELECTRICAL LIFES000 CyclesDETAILED DESCRIPTIONTogle Switch SPDT Surface Mount, Right AngleCURRENT RATINGN4X (AC/DC)CIRCUTSDTBUSHING THREADUhtreadedACTUATOR TYPESindar RoundACTUATOR TYPESindar RoundACTUATOR MATERIALSindar Round	INGRESS PROTECTION	IP67 - Dust Tight, Waterproof
ILLUMINATIONNon-IlluminatedFEATURESFpoxy Sealed TerminalsELECTRICAL LIFE0,000 CyclesDETAILED DESCRIPTIONTogle Switch SPDT Surface Mount, Right AngleCURRENT RATING0.4VA (AC/DC)CIRCUITSPDTBUSHING THREADUnthreadedACTUATOR TYPEStandard RoundACTUATOR MATERIALBras, Chome Plated	ILLUMINATION VOLTAGE (NOMINAL)	-
FEATURESEpox Sealed TerminalsELECTRICAL LIFE5,000 CyclesDETAILED DESCRIPTIONTogle Switch SPDT Surface Mount, Right AngleCURRENT RATING0.4VA (AC/DC)CIRCUITSPDTBUSHING THREADUntreadedACTUATOR TYPESandard RoundACTUATOR MATERIALBas, Chome Plated	ILLUMINATION TYPE, COLOR	-
ELECTRICAL LIFE50,000 CyclesDETAILED DESCRIPTIONTogle Switch SPDT Surface Mount, Right AngleCURRENT RATING0.4VA (AC/DC)CIRCUITSPDTBUSHING THREADUnthreadedACTUATOR TYPEStandar RoundACTUATOR MATERIALBras, Chrome Plated	ILLUMINATION	Non-Illuminated
DETAILED DESCRIPTIONTogle Switch SPDT Surface Mount, Right AngleCURRENT RATING0.4VA (AC/DC)CIRCUITSPDTBUSHING THREADUnthreadedACTUATOR TYPEStandard RoundACTUATOR MATERIALBras, Chrome Plated	FEATURES	Epoxy Sealed Terminals
CURRENT RATING0.4VA (AC/DC)CIRCUITSPDTBUSHING THREADUnthreadedACTUATOR TYPEStandard RoundACTUATOR MATERIALBrass, Chrome Plated	ELECTRICAL LIFE	50,000 Cycles
CIRCUITSPDTBUSHING THREADUnthreadedACTUATOR TYPEStandar RoundACTUATOR MATERIALBrass, Chrome Plated	DETAILED DESCRIPTION	Toggle Switch SPDT Surface Mount, Right Angle
BUSHING THREADUnthreadedACTUATOR TYPEStandard RoundACTUATOR MATERIALBrass, Chrome Plated	CURRENT RATING	0.4VA (AC/DC)
ACTUATOR TYPE Standard Round ACTUATOR MATERIAL Brass, Chrome Plated	CIRCUIT	SPDT
ACTUATOR MATERIAL Brass, Chrome Plated	BUSHING THREAD	Unthreaded
	ACTUATOR TYPE	Standard Round
ACTUATOR LENGTH 6.10mm	ACTUATOR MATERIAL	Brass, Chrome Plated
	ACTUATOR LENGTH	6.10mm

## **Related Tags**

E-Switch 200BWMSP1T2A1SM6RE		
E-Switch 200BWMSP1T2A1SM6RE	E-Switch Supplier	E-Switch Distributor
200BWMSP1T2A1SM6RE Stock	Buy 200BWMSP1T2A1SM6RE	Buy E-Switch 200BWMSP1T2A1SM6RE
200BWMSP1T2A1SM6RE PDF Datasheet	200BWMSP1T2A1SM6RE Download Datasheet	200BWMSP1T2A1SM6RE Datasheet
200BWMSP1T2A1SM6RE Price	200BWMSP1T2A1SM6RE Pictures	200BWMSP1T2A1SM6RE Image
E-Switch 200BWMSP1T2A1SM6RE	200BWMSP1T2A1SM6RE Distributor	200BWMSP1T2A1SM6RE Supplier

## **Related Products**

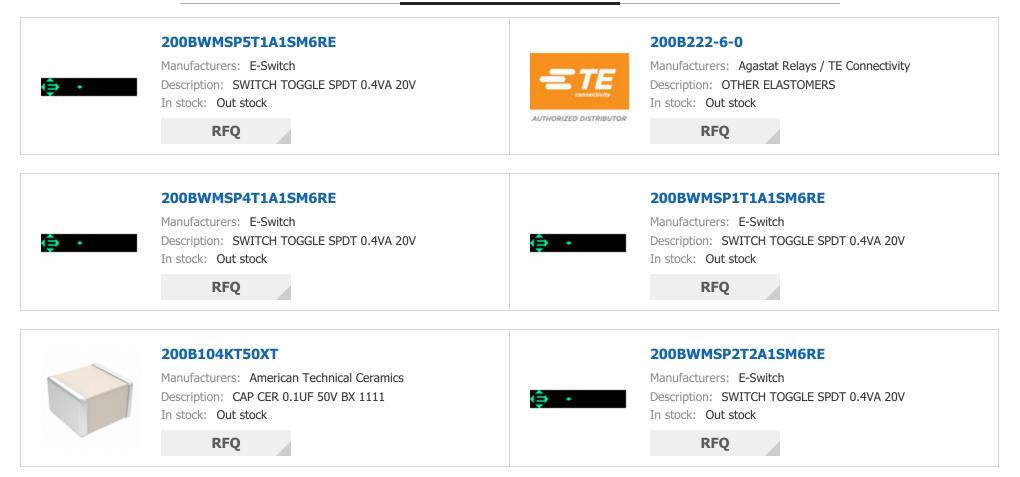

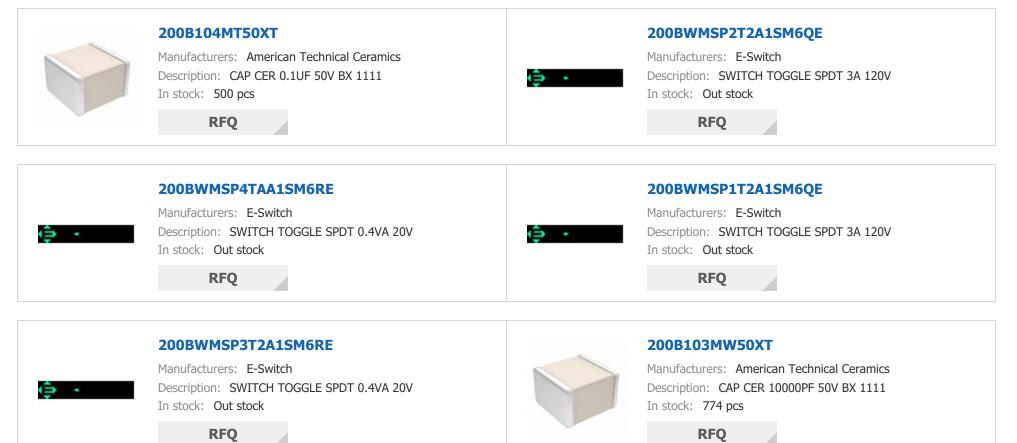

## Copyright © 2020 Reliable Distributor of Electronic Components - Ocean-Components.com

E-mail: Info@Ocean-Components.com

Address: Room 2102, Connaught Commercial Building, 185 Wan Chai Rd, Wan Chai, Hong Kong

