
#### SS-10-2D1 Details PDF

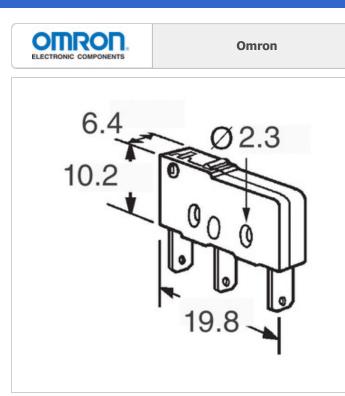

## SS-10-2D1

Part Number:
Manufacturer/Brand:
Product description
Datasheets:
RoHs Status
Ship From
Shipment Way

## SS-10-2D1 Omron SWITCH SNAP ACT SPST-NC 10A 250V SS-10-2D1.pdf Lead free / RoHS Compliant Hong Kong

DHL/Fedex/TNT/UPS/EMS

### **REQUEST FOR QUOTATION**

Specifications of SS-10-2D1

Image may be representation. See specifications for product details.

WANUFACTUREROmonDESCRIPTIONSWITCH SNAP ACT SPST-NC 10A 250VLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantDATA SHEETSS-10-2D1.pdfCOLTAGE RATING - AC200VVOLTAGE RATING - ACPC PinSWITCH FUNCTIONOn-MomSERIESSSSERIESSSRELEASE FORCE25gfPACKAGING0.015" (0.4mm)DYDERATING TEMPERATURE0.015" (0.4mm)DYDERATING FORCE150gfOPERATING FORCE1000,000 CyclesOPERATING FORCE1000,000 CyclesMOUNTING TYPE1000,000 CyclesMOUNTING TYPE1000,000 CyclesMULFACTURER STATUS / ROHS STATUS1000,000 CyclesMANUFACTURER STATUS / ROHS STATUS10000 CyclesMANUFACTURES10000 CyclesMANUFACTURES10000 CyclesMANUFACTURES10000 CyclesMANUFACTURE		Specifications of 35 10 201
DescriptionSWITCH SNAP ACT SPST-NC 10A 250%LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantDATA SHEETSS-10-2D1.pdfVOLTAGE RATING - ACSOVSWITCH FUNCTIONPC PinSWITCH FUNCTIONOn-MomSERLEASE FORCESGPRETRAVELOL24" (0.6mm)PACKAGINGSI0201DYDERTAIVELO.15" (0.4mm)DYDERTAIVELO.15" (0.4mm)DYDERTAIVELSI0201OVERTRAVELSI0201DYDERATING FORCESI0201DYDERATING FORCESI0201OVERTRAVELO.05" (0.4mm)DYDERATING FORCESI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201OVERTRAVELSI0201O	PART NUMBER	SS-10-2D1
LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEET© SS-10-2D1.pdfVOLTAGE RATING - AC250VTERMINATION STYLEPC PinSWITCH FUNCTIONOn-MomSKRLEASE FORCESSRELEASE FORCE25gfPACKAGINGNUSDYERTRAVEL0.024" (0.6mm)DYERTRAVEL0.015" (0.4mm)DYERTAVEL0.015" (0.4mm)DYERTAVELSS 102D1DYERTATURE CONSTRATURESS 102D1DYERTATURE CONSTRATURESS 102D1DYERTATING FORCE150gfMUNITING TYPE10,000,000 CyclesMUNIFACTURER STATUS / ROHS STATUSIde free / RoHS CompliantMUNIFACTURER STATUS / ROHS STATUS10,000,000 CyclesLEAD FREE STATUS / ROHS STATUSIde free / RoHS CompliantFEATURESInclusionFEATURESInclusionELECTRICAL LIFE50,000 CyclesFEATURESS0,000 CyclesFEA	MANUFACTURER	Omron
DATA SHEETSS-10-2D1.pdfVOLTAGE RATING - AC250VTERMINATION STYLEPC PinSWITCH FUNCTIONOn-MomSWITCH FUNCTIONSSSWITCH FUNCTIONSSSWITCH FUNCTION0.024* (0.6mm)SWITCH FUNCTION0.024* (0.6mm)PRETRAVEL0.015* (0.4mm)PACKAGINGSI02D1POLERATING TEMPERATURE0.300* (0.4mm)OPERATING FORCE1506OPERATING FORCE1507OPERATING FORCE1000,000 CyclesMOUNTING TYPE1000,000 CyclesMOUNTING	DESCRIPTION	SWITCH SNAP ACT SPST-NC 10A 250V
XOLTAGE RATING - AC250VFERMINATION STYLEPC PinSWITCH FUNCTIONOn-MomSWITCH FUNCTIONSSSERIESSSRELEASE FORCE25gfPACKAGINGOL24" (0.6mm)PACKAGINGBulkDVERTRAVEL0.015" (0.4mm)DVERTRAVELSS102D1DVERTAVEL0.015" (0.4mm)DVERTATORSS102D1DVERTATING FORCE1000 (0.4mm)DVERTATING FORCE1001DVERTATING FORCE1001MOUNTING TYPE1000,000 CyclesMOUNTING TYPE1000,000 CyclesMOUNTING TYPE120 KeksMOUNTING TYPE1	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
TERMINATION STYLEPC PinSWITCH FUNCTION0n-MomSWITCH FUNCTIONSSSERIESSSRELEASE FORCE29fPRETRAVEL024" (0.6mm)PACKAGING015" (0.4mm)OVERTRAVEL015" (0.4mm)OVERTRAVELSS1021OVERTRAVEL015" (0.4mm)OVERTRAVEL033" (0.4mm)OVERTATING FORFEATURE0330" (0.4mm)OVERTATING FORCE1000 (0.4mm)OVERTATING FORCE1000 (0.4mm)OVERTATING FORCE1000 (0.4mm)MOUNTING TYPE1000 (0.4mm) <t< td=""><td>DATA SHEET</td><td>5S-10-2D1.pdf</td></t<>	DATA SHEET	5S-10-2D1.pdf
SWITCH FUNCTIONOn-MomSERIESSSRELEASE FORCESSRELEASE FORCE25fPRETRAVEL0.024" (0.6mm)OVERTRAVEL0.015" (0.4mm)OVERTRAVELSS1021OVERTRAVEL25°C ~ 85°COPERATING TEMPERATURE0.30" (8.4mm)OPERATING FORCE100gfOVERTRAVEL100gfOVERTRAVEL100g1OPERATING FORCE100g1OVERTRAVEL100g1OVERTRAVEL1000,000 (2des)OVERATING FORCE1000,000 (2des)MOUNTING TYPE18 WeeksMANUFACTURER STANDARD LEAD TIME18 WeeksANNUFACTURES STATUS / ROHS STATUS1000 (2des)MARESS PROTECTION1000 (2des)FATURES5000 (2des)ELECTRICAL LIFE50000 (2des)ELECTRICAL LIFE <td< td=""><td>VOLTAGE RATING - AC</td><td>250V</td></td<>	VOLTAGE RATING - AC	250V
SERIESSSRELEASE FORCE25gRETRAVEL0.024" (0.6mm)PACKAGINGBukOVERTRAVEL0.015" (0.4mm)OVERTRAVELS102D1OVERTRAVELS102D1OVERTRAVEL0.30" (8.4mm)OVERATING FORCE100g (8.4mm)OVE	TERMINATION STYLE	PC Pin
RELEASE FORCE25gfPRETRAVEL0.024" (0.6mm)PACKAGINGBulkPACKAGING0.015" (0.4mm)DVERTRAVEL0.015" (0.4mm)DTHER NAMESSS102D1DPERATING TEMPERATURE0.300" (8.4mm)DPERATING POSITION0.303" (8.4mm)DPERATING FORCE150gfMOUNTING TYPE1000,000 CyclesMOUNTING TYPE1000,000 CyclesMOUNTING TYPE1000,000 CyclesMANUFACTURER STANDARD LEAD TIME18 WeeksMANUFACTURER STANDARD LEAD TIME164 free / ROHS CompliantINGRESS PROTECTION140FEATURES5,000 CyclesELECTRICAL LIFE5,000 CyclesELECTRICAL LIFE0.005" (0.12mm)DIFFERENTIAL TRAVEL0.005" (0.12mm)CURRENT RATING10.005" (0.12mm)	SWITCH FUNCTION	On-Mom
PRETRAVEL 0.024" (0.6mm) PACKAGING 0.015" (0.4mm) PACKAGING 0.015" (0.4mm) DVERTRAVEL 0.015" (0.4mm) DVERTRAVEL 0.015" (0.4mm) DVERATING TEMPERATURE 0.025° ~ 85°C DVERATING TEMPERATURE 0.030" (8.4mm) DVERATING POSITION 0.030" (8.4mm) DVERATING FORCE 1.010" 1000 (0.010") DVERATING FORCE 0.010" 1000 (0.010") DVERATING FORCE 0.010" 1000 (0.010") DVERATING SENSITIVITY LEVEL (MSL) 0.1010" (0.010") DVERATING SENSITIVITY LEVEL (MSL) 1000 (0.010") DVERATING SENSITIVITY LEVEL (MSL) 1000 (0.010") DVECHANICAL LIFE 0.010" 1000 (0.010") DVECHANICAL LIFE 0.010" 1000 (0.010") DVECHANICAL LIFE 0.010" (0.010") DVECHANICAL LIFE 0.000" (0.100") DVECHANICAL LIFE 0.000" (0.100")	SERIES	SS
PACKAGING Buk DVERTRAVEL 0.15" (0.4mm) DYERATING TEMPERATURE STATUS DYERATING POSITION 0.30" (8.4mm) DYERATING POSITION 0.30" (8.4mm) DYERATING POSITION 0.30" (8.4mm) DYERATING FORCE 0.30" (8.4mm) DYERATING TEMPERATURE 0.30" (8.4mm) DYERATING FORCE 0.30" (8.4mm) DYERATING TEMPERATURE 0.30" (8.4mm) DYERATURE 0.30" (8.4mm) DYERATURE 0.30" (8.4mm) DYERATING TEMPERATURE 0.30" (8.4mm) DYERATURE 0.30" (8.4mm) D	RELEASE FORCE	25gf
DVERTRAVEL0.015" (0.4mm)DVERTRAVELS102D1DVERATING TEMPERATURE-25°C ~ 85°CDVERATING POSITION0.30" (8.4mm)DVERATING FORCE150g1MOUNTING TYPEThrough Hole, Right AngleMOUNTING TYPE1 (Unimited)MOUNTING TYPE10,000,000 CyclesMANUFACTURER STANDARD LEAD TIME18 WeeksLEAD FREE STATUS / ROHS STATUSP40FEATURES-FEATURES5,000 CyclesELECTRICAL LIFE0,005" (0.12mm)DIFFERENTIAL TRAVEL10,005" (0.12mm)CURRENT RATING10,005" (0.12mm)	PRETRAVEL	0.024" (0.6mm)
DTHER NAMESSS102D1OPERATING TEMPERATURE-25°C ~ 85°COPERATING POSITION0.330" (8.4mm)OPERATING FORCE150gfMOUNTING TYPEThrough Hole, Right AngleMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MANUFACTURER STANDARD LEAD TIME18 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION1400FEATURES0.000 CyclesELECTRICAL LIFE50,000 CyclesINGRESS PROTECTION10,000 CyclesINGRESS PROTECTION10,000 CyclesELECTRICAL LIFE50,000 CyclesELECTRICAL LIFE10,000 CyclesELECTRICAL CYCLES10,000 Cycles <td< td=""><td>PACKAGING</td><td>Bulk</td></td<>	PACKAGING	Bulk
DPERATING TEMPERATURE-25°C ~ 85°CDPERATING POSITION0.330" (8.4mm)DPERATING POSITION1000DPERATING FORCE150gfMOUNTING TYPE1 (Unlimited)MOUNTING TYPE10,000,000 CyclesMANUFACTURER STANDARD LEAD TIME18 WeeksLEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantINGRESS PROTECTION140ELECTRICAL LIFE50,000 CyclesELECTRICAL LIFE50,000 CyclesELECTRICAL LIFE10,000 CyclesELECTRICAL CYCLES10,000 CyclesELECTRICAL CYCLES10,000 CyclesELECTRICAL CYCLES10,000 CyclesELECTRICAL CYCLES10,000 CyclesELECTRICAL CYCLES10,000 CyclesELECTRICAL CY	OVERTRAVEL	0.015" (0.4mm)
DPERATING POSITION0.330" (8.4mm)DPERATING PORCE150gfMOUNTING TYPEThrough Hole, Right AngleMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MCHANICAL LIFE10,000,000 CyclesMANUFACTURER STANDARD LEAD TIME18 WeeksLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantINGRESS PROTECTION140ELECTRICAL LIFE50,000 CyclesELECTRICAL LIFE0.005" (0.12mm)CURRENT RATING104 (AC)	OTHER NAMES	SS102D1
DPERATING FORCE150gfMOUNTING TYPEThrough Hole, Right AngleMOISTURE SENSITIVITY LEVEL (MSL)1 (Unlimited)MECHANICAL LIFE10,000,002 (cles)MANUFACTURER STANDARD LEAD TIME18 WeeksLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantINGRESS PROTECTION1940ELECTRICAL LIFE5,000 (cles)ELECTRICAL LIFE0.005" (cl.2mm)CURRENT RATURG104 (cl.2mm)	OPERATING TEMPERATURE	-25°C ~ 85°C
MOUNTING TYPE Through Hole, Right Angle 1 (Unlimited) 1 (U	OPERATING POSITION	0.330" (8.4mm)
MOISTURE SENSITIVITY LEVEL (MSL) 1 (Unlimited) MECHANICAL LIFE 10,000,000 Cycles MANUFACTURER STANDARD LEAD TIME 18 Weeks LEAD FREE STATUS / ROHS STATUS LEAD TIME 18 Weeks LEAD FREE STATUS / ROHS STATUS 12 Lead free / RoHS Compliant INGRESS PROTECTION 1P40 ELECTRICAL LIFE 50,000 Cycles DIFFERENTIAL TRAVEL 0.005" (0.12mm) CURRENT RATING 10A (AC)	OPERATING FORCE	150gf
MECHANICAL LIFE10,000,000 CyclesMANUFACTURER STANDARD LEAD TIME18 WeeksLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantINGRESS PROTECTION1940ELECTRICAL LIFE50,000 CyclesDIFFERENTIAL TRAVEL0.005" (0.12mm)CURRENT RATING104 (AC)	MOUNTING TYPE	Through Hole, Right Angle
MANUFACTURER STANDARD LEAD TIME18 WeeksLEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantINGRESS PROTECTIONIP40EATURES-ELECTRICAL LIFE50,000 CyclesDIFFERENTIAL TRAVEL0.005" (0.12mm)CURRENT RATINGID4 (AC)	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)
LEAD FREE STATUS / ROHS STATUSLead free / RoHS CompliantINGRESS PROTECTIONIP40FEATURES-ELECTRICAL LIFE50,000 CyclesDIFFERENTIAL TRAVEL0.005" (0.12mm)CURRENT RATINGID4 (AC)	MECHANICAL LIFE	10,000,000 Cycles
INGRESS PROTECTION IP40 FEATURES - ELECTRICAL LIFE 50,000 Cycles DIFFERENTIAL TRAVEL 0.005" (0.12mm) CURRENT RATING 104 (AC)	MANUFACTURER STANDARD LEAD TIME	18 Weeks
FEATURES-ELECTRICAL LIFE50,000 CyclesDIFFERENTIAL TRAVEL0.005" (0.12mm)CURRENT RATING10A (AC)	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant
ELECTRICAL LIFE 50,000 Cycles   DIFFERENTIAL TRAVEL 0.005" (0.12mm)   CURRENT RATING 10A (AC)	INGRESS PROTECTION	IP40
DIFFERENTIAL TRAVEL     0.005" (0.12mm)       CURRENT RATING     10A (AC)	FEATURES	-
CURRENT RATING 10A (AC)	ELECTRICAL LIFE	50,000 Cycles
	DIFFERENTIAL TRAVEL	0.005" (0.12mm)
CIRCUIT SPST-NC	CURRENT RATING	10A (AC)
	CIRCUIT	SPST-NC
ACTUATOR TYPE Round (Pin Plunger)	ACTUATOR TYPE	Round (Pin Plunger)

## **Related Tags**

Omron SS-10-2D1	SS-10-2D1 Distributor	SS-10-2D1 Supplier
SS-10-2D1 Price	SS-10-2D1 Pictures	SS-10-2D1 Image
SS-10-2D1 PDF Datasheet	SS-10-2D1 Download Datasheet	SS-10-2D1 Datasheet
SS-10-2D1 Stock	Buy SS-10-2D1	Buy Omron SS-10-2D1
Omron SS-10-2D1	Omron Supplier	Omron Distributor
Omron SS-10-2D1	Omron Electronics Inc-IA Div SS-10-2D1	Omron Electronics Inc-EMC Div SS-10-2D1
Omron Electronics LLC SS-10-2D1		

# **Related Products**

	SS-10-2D2 Manufacturers: Omron Description: SWITCH SNAP ACT SPST-NC 10A 250V In stock: Out stock RFQ	a	SS-10-23NPE Manufacturers: Copal Electronics Description: SWITCH ROTARY DIP DP3T 100MA 5V In stock: Out stock RFQ
	<b>SS-10-3D</b> Manufacturers: Omron Description: SWITCH SNAP ACT SPST-NO 10A 250V In stock: Out stock		<b>SS-10.055.28</b> Manufacturers: Davies Molding, LLC. Description: HARDWARE MISC In stock: Out stock
	RFQ		RFQ
(1)	SS-10-16SP-L-AE		SS-10-3
	Manufacturers: Copal Electronics Description: SWITCH ROTARY DIP SP6T 100MA 5V In stock: Out stock	0.00	Manufacturers: Omron Description: SWITCH SNAP ACT SPST-NO 10A 250V In stock: 495 pcs
	RFQ		RFQ

SS-1	LO-	23	Ν	F
------	-----	----	---	---

23NP-LE

SS-10-2T

SS-10-2



Manufacturers: Copal Electronics Description: SWITCH ROTARY DIP DP3T 100MA 5V In stock: Out stock

RFQ



Manufacturers: Omron Description: SWITCH SNAP ACT SPST-NC 10A 250V In stock: Out stock

RFQ



#### SS-10-2D

Manufacturers: Omron Description: SWITCH SNAP ACT SPST-NC 10A 250V In stock: 500 pcs

RFQ



Manufacturers: Omron Description: SWITCH SNAP ACT SPST-NC 10A 250V In stock: 498 pcs

RFQ



#### Copyright @ 2020 Reliable Distributor of Electronic Components - Ocean-Components.com

E-mail: Info@Ocean-Components.com

Address: Room 2102, Connaught Commercial Building, 185 Wan Chai Rd, Wan Chai, Hong Kong

