## 78RB08T Details PDF



Image may be representation. See specifications for product details.

## 78RB08T

Part Number:
Manufacturer/Brand:
Product description
Datasheets:
RoHs Status
Ship From
Shipment Way

# 78RB08T Grayhill, Inc. SWITCH SLIDE DIP SPST 150MA 30V 78RB08T.pdf Lead free / RoHS Compliant Hong Kong DHL/Fedex/TNT/UPS/EMS


### **REQUEST FOR QUOTATION**

Specifications of 78RB08T       PART NUMBER     78R08T       MANUFACTURER     GrayNUL Inc.       DESCRIPTION     SWITCH SLIDE DIP SPST 150MA 30V       LEAD FREE STATUS / ROH'S STATUS     Lead free / RoH'S Compliant.       DATA SHET     GrayNul, Inc.       VICHASLE STATUS / ROH'S STATUS     Lead free / RoH'S Compliant.       DATA SHET     GrayNul, Inc.       VICHASLE STATUS / ROH'S STATUS     Lead free / RoH'S Compliant.       OLTA SHET     PC PIn       SERLES     78       PTCH     NLO'OC / STATUS       PTCH     DLO'O (2.54mm), Full       PACKGING     Tube       OTHER NAMES     HOROLY / STATUS       NUMER OF POSITIONS     8       MOUNTING TYPE     Hrough Hole       NUMER OF POSITIONS     1 (Unimitee)       MOUNTING TYPE     Desorth Scompliant       MOUNTING TYPE     Desorth Scompliant       NOUTRER STATUS / ROH'S STATUS     Log free / Roh'S Compliant       MOUNTING TYPE     Desorth Scompliant       LINDTH     Log free / Roh'S Compliant       LINDTH     Log free / Roh'S Compliant       LINDT				
MNUFACTURERGrayNil, Inc.DESCRIPTIONSWITCH SLIDE DIP SPST ISOMA JOVLEAD FREES TATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEETSWITCH SLIDE DIP SPST ISOMA JOVNASHARENoVILTAGE RATINGNOCSERLESOTOC (SAGMIN, FullPRICHDIOY (SAGMIN, FullPRCAGINGColor (SAGMIN, FullOFFER NAMESGOOY (SAGMIN, FullOFFER NAMESGAPC & SSYCOFFER NAMESAGNC CASHIN, FullOFFER NAMESGAPC & SSYCOTHER NAMESGAPC & SSYCNUMERE OF FOSTITUTY LEVEL (MSL)1 (Unimited)MOUTING TYPEQABOY (2SAGMI)MAUFACTURER STATUS / ROHS STATUSGABOY (2SAGMI)MAUFACTURER STATUS / ROHS STATUSCaSHIC (SAGMIN)LENGTHQABOY (2SAGMI)LENGTHQABOY (2SAGMI)LENGTHQABOY (2SAGMI)LENGTH ADOVE BOARDCASHING (SAGMIARI) Actuator 150mA 30VCLENGTH ADOVE BOARDGASY (6.73MIN)LENGTHALQADOY CASHINGLENGTHALGANACONTACT FURSINGGANACONTACT FURSINGGANACONTACT FURSINGGAGCONTACT FURSINGGAICONTACT FURSINGGAI <t< th=""><th></th><th>Specifications of 78RB08T</th></t<>		Specifications of 78RB08T		
MNUFACTURERGrayNil, Inc.DESCRIPTIONSWITCH SLIDE DIP SPST ISOMA JOVLEAD FREES TATUS / ROHS STATUSLead free / RoHS CompliantDATA SHEETSWITCH SLIDE DIP SPST ISOMA JOVNASHARENoVILTAGE RATINGNOCSERLESOTOC (SAGMIN, FullPRICHDIOY (SAGMIN, FullPRCAGINGColor (SAGMIN, FullOFFER NAMESGOOY (SAGMIN, FullOFFER NAMESGAPC & SSYCOFFER NAMESAGNC CASHIN, FullOFFER NAMESGAPC & SSYCOTHER NAMESGAPC & SSYCNUMERE OF FOSTITUTY LEVEL (MSL)1 (Unimited)MOUTING TYPEQABOY (2SAGMI)MAUFACTURER STATUS / ROHS STATUSGABOY (2SAGMI)MAUFACTURER STATUS / ROHS STATUSCaSHIC (SAGMIN)LENGTHQABOY (2SAGMI)LENGTHQABOY (2SAGMI)LENGTHQABOY (2SAGMI)LENGTH ADOVE BOARDCASHING (SAGMIARI) Actuator 150mA 30VCLENGTH ADOVE BOARDGASY (6.73MIN)LENGTHALQADOY CASHINGLENGTHALGANACONTACT FURSINGGANACONTACT FURSINGGANACONTACT FURSINGGAGCONTACT FURSINGGAICONTACT FURSINGGAI <t< td=""><td></td><td></td></t<>				
DescriptionWITCH SLIDE DPS ST 150M 30VLEAD FACE STATUS / ROHS STATUSLead free / RohS CompliantDATA SHEETNoVICTAGE RATING3VDCCOLTAGE RATINGCP PinRENUESTION STYLECP PinSERLES78PITCH100 (25 Mmn), FullPACAGINGMoOTHER NAMESGR02 (25 Mmn), FullOTHER NAMES40°C ~ 85°COTHER NAMES100 (25 Mmn), FullMOUTTING THER40°C ~ 85°CNUMERE OF POSITIONS8MOUTTING THER100 (24 Smn)MOUTTING THER2000 CyclesMAUFACTURES SENSITIVITY LEVEL (MSL)100 (Julimited)MAUFACTURES SENSITIVITY LEVEL (MSL)6.88° (22 Smn)LENGTH0.88° (22 Smn)LENGTH0.88° (62 Smn)LENGTH0.98° (Smn)ELECTRICAL LIFE0.900 CyclesLECTRICAL LIFE0.900 CyclesCURATER TATINGGARCHARLEST THISHCURATER TATING0.98° (Smn)ELECTRICAL LIFE0.900 CyclesLECTRICAL LIFE0.900 CyclesCURATER TATING0.98° (Smn)ELECTRICAL LIFE0.900 CyclesCURATER TATING0.98° (Smn)CURATER TATING0.98°				
LEAD FREE STATUS / ROMS STATUSLead fee / RohS CompliantDATA SHEETRoVASHARENoVALTAGE NATINGOVCTERMINATION STATLEPC PISERIES78PTCH0.100° (2.54mm), FullPACKAGINGUOO' (2.54mm), FullPACKAGINGGNO*/C.54mm), FullOPERATING TEMPERATURE400° (2.54mm), FullOPERATING TEMPERATURE400° (2.54mm), FullOPERATING TEMPERATURE400° (2.54mm), FullOUNTING TEMPERATURE400° (2.54mm), FullOPERATING TEMPERATURE400° (2.54mm), FullMUMERE OF POSITIONS8MOUNTING TYPETooly HoleMOUNTING TYPE1000 (2.55mm)MULFACTURER STANDARD LEAD TIME0.860° (2.55mm)LEAD FREE STATUS / RONS TATUS6.36° (2.55mm)LEAD FREE STATUS / RONS TATUS100° (2.55mm)LEAD FREE STATUS / RONS TATUS100° (2.55mm)ELECTIAL LIFE2,000 CyclesLEAD FREE STATUS / RONS TATUS100° CyclesCURRENT RATING100° CyclesCURRENT RATING <td></td> <td></td>				
DAT SHERTReBRBT.pffWASHARLENoVOLTAGE RATINGSVOCTERMINATION STYLEPC PinSERLES78PITCH0.0007 (2.54mm), FullPACAGINGCM2OTHER NAMES-0007 (2.54mm), FullOTHER NAMES-0007 (2.54mm), FullMOUNTING TYPE-0007 (2.54mm), FullMURE ADARDE LEAD TIME-0007 (2.54mm), FULLFLET ADAVE BOARD-0007 (2.54mm), FULLFLET ADAVE BOARD<	DESCRIPTION	SWITCH SLIDE DIP SPST 150MA 30V		
NoVOSTAGE RATINGNO/CTERMINATION STYLECP IRSERIES78PITCH0.100° (2.54mm), FullPACKAGINGGV2.13OTHER NAMESGV2.13OTHER NAMES4.0°C ~ 85°CNUMBER OF POSITIONS8MOUTING TYPE1000 (Jold FullMOUTING TYPE(Jold FullMAURAGE AND ARD LEAD TIME3.000 (Jold FullMILFE STATUST RADARD LEAD TIME1.000 (Jold FullLEIGTH ADOVE BOARD1.000 (Jold FullLEIGTH ADOVE BOARD0.868° (22.5mm)ELEIGTA LIFE0.868° (22.5mm)ELEIGTA LIFE0.000 (Jold FullLEIGTA LIFE0.000 (Jold FullLEIGTA LIFE0.000 (Jold FullLEIGTA LIFE0.000 (Jold FullLIGTA TAUSE RADARD LEAD TIME0.268° (22.5mm)LEIGTA LIFE0.000 (Jold FullLEIGTA LIFE0.000 (Jold FullLIGTA TAUSE RADARD0.268° (22.5mm)LIGTA TAUSE RADARD0.268° (22.5mm)LIGTA TAUSE RADARD0.269 (Jold FullLIGTA TAUSE RADARD0.260 (Jold FullCAUTAGE TAUSE0.260 (	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant		
VCITAGE RATINGSIVOCTERMINATION STYLECP InSERIES78PITCH0.000 (2.54mm), FullPACKAGINGVBCOTHER NAMESGM20 (2.54mm), FullOTHER NAMESH972 (3.000 (3.00	DATA SHEET	78RB08T.pdf		
TERNINATION STYLEPC PinSRIES30PTCH0.00 (2.54mm, FullPACAGINGTotaOTHER NAMES0.723OTHER NAMES0.60 < 0.552	WASHABLE	No		
SRIES9PTCH0.00° (2.54m), FullPACAGINGTubOTHER NAMES64713OTHER NAMES40°C 85°CNUMBER OF POSITIONS8MOUNTING TYPETudindalMOSTURE SENSITIVITY LEVEL (MSL)0.00 (valsMAUAPACTURER STANDARD LEAD TIME0.00 (valsMAUAPACTURER STANDARD LEAD TIME0.00 (valsLEAGTH0.00 (valsLEGTRI AL DEVE DATA0.00 (valsLEGTRI AL LIFE0.00 (valsLIGTRI AL LIFE0.00 (valsCUTATE TING0.00 (vals </td <td>VOLTAGE RATING</td> <td>30VDC</td>	VOLTAGE RATING	30VDC		
PITCH0.10° (2.54mm), FullPACKAGINGTubeOTHER NAMES6/721OPERATING TEMPERATURE4.0°C ~ 85°CNUMBER OF POSITIONS8MOUNTING TYPETubu HoleMOUNTING TYPE(Julimited)MOISTURE SENSITIVITY LEVEL(MSL)(Julimited)MOURTURE SENSITIVITY LEVEL(MSL)0.00 cyclesMAUFACTURER STANDARD LEAD TIME0.00 cyclesLENGTH0.80°C 2.35mm)LENGTH0.80°C 2.35mm)ELEGT RADORE BOARD0.26°C 4.35mm)ELEGT RADORE BOARD0.26°C 4.35mm)ELEGT RADORE BOARD0.20°C 4.35mm)CORACT MATERIAL0.20°C 4.35mm)CORACT RATING0.20°C 4.35mm)	TERMINATION STYLE	PC Pin		
PACAGINGTubeOTHER NAMES6H713OPERATING TEMPERATURE4.0°C AS°CNUMBER OF DOSITIONS8MOUNTING TYPETrough HoleMOISTURE SENSITIVITY LEVEL (MSL)(Julimita)MOLAGALIFE3.000 cyolasMAUHARCURER STANDARD LEAD TIME0.000 cyolasLENGTH0.08°C 23.5mm)LENGTH6.06°C 23.5mm)ELENGTA SADOLE DATORS6.06°C 23.5mm)ELENGTA LIFE0.000 cyolasELENGTA SADOLE DATORS6.06°C 23.5mm)ELENGTA SADOLE DATORS0.000 cyolasELENGTA SADOLE DATORS0.000 cyolasELENGTA SADOLE DATORS0.000 cyolasELENGTA LIFE0.000 cyolasELENGTA SADOLE DATORS0.000 cyolasELENGTA SADOLE DATORS0.000 cyolasELENGTA SADOLE DATORS0.000 cyolasELENGTALIFE0.000 cyolasCONTACT MATENIA0.000 cyolasCONTACT MATENIA0.000 cyolasCONTACT FINISH0.000 cyolasCONTACT FINISH0.	SERIES	78		
OTHER NAMESGH713OPERATING TEMPERATURE-40°C ~ 85°CNUMBER OF POSITIONS8MOUNTING TYPEThough HoleMOINTING TYPE(Julinited)MOISTURE SENSTITUTY LEVEL (MSL)(Julinited)MAUFACTURER STANDARD LEAD TIME(JoO CyclesLENGTH0.880° (22.55m)LENGTH0.880° (23.55m)LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.50° (67.37m)FLATURES.000 CyclesLEATRICAL LIFEJOO CyclesILEATRIAL LIFEJOO CyclesCONTACT MATERIALDiswich SPS to Flosition Through Hole Slide (Standard) Actuator 150m A30VDCCONTACT MATERIALGoler AllowCONTACT MATERIALGoler AllowCONTACT FINISHGoleCONTACT FINISHFMENDERALFOLY MATERIALFmenDiatactFOLY MATERIALThrouge BlockCONTACT TYPESide (Standard)	PITCH	0.100" (2.54mm), Full		
OPERATING TEMPERATURE40°C × 8°CNUMBER OF POSITIONS8MOUNTING TYPEThrough HoleMOISTURE SENSITIVIT LEVEL (MSL)1 (Unimed)MECHANICAL LIFE200 CyclesMANUFACTURER STANDARD LEAD TIME0 WeeksLENGTH0.880° (22.3mm)LEAD FREE STATUS / ROHS STATUSCalfer / ROHS CompliantHEIGHT ABOVE BOARD0.580° (6.7mm)FATURES-ELETRICAL LIFE0.90 CyclesELETRICAL LIFE0.90 CyclesELETRICAL LIFE0.90 CyclesELETRICAL LIFE0.90 CyclesCONTACT MATERIAL0.90 CyclesCONTACT TINSH0.90 CyclesCONTACT TINSH0.90 CyclesCONTACT TINSH0.90 CyclesCONTACT TINSH0.90 CyclesCONTACT TINSH0.90 CyclesCONTACT TINSH0.90 Cycl	PACKAGING	Tube		
NUMBER OF POSITIONS8MOUNTING TYPETrough HoleMOSTURE SENSITIVTY LEVEL (MSL)(I/IImited)MANUFACTURER STANDARD LEAD TIME2000 CyclesMANUFACTURER STANDARD LEAD TIME0.808° (2.35mm)LENGTHCadfree / RoHSC CompliantHEIGHT ABOVE BOARD0.205° (6.37mm)FEATURES0.000 CyclesECTRICAL LIFE0.000 CyclesECTRICAL LIFE0.000 CyclesCIRCENT RATING0.000 CyclesCIRCENT RATING0.000 CyclesCONTACT FINISH0.000 CyclesCONTACT FINISH <td< td=""><td>OTHER NAMES</td><td>GH7213</td></td<>	OTHER NAMES	GH7213		
MOURTING TYPEInvage HeleMOURTING TYPEI/UnimedyMOUSTURE SENSITIVTY LEVEL (MSL)I/UnimedyMECHANICAL LIFEJ/OO CyclesMANUFACTURER STANDARD LEAD TIMEI/O WeeksLENGTHI/S80° (2.35mm)LEAD FREE STATUS / ROHS STATUSI/Gaf (A/G MSM)FEGHT ABOVE BOARDJ/OS (G/G MSM)FEGTIRESJ/OO CyclesELCTRICAL LIFEJ/OO CyclesLECTRICAL LIFEJ/OO CyclesCURRENT RATINGJ/OO CyclesCURRENT RATINGG/OP AlloyCONTACT FINISHG/OCONTACT FINISHG/OCONTACT FINISHSPSTFOOY MATERIALJ/EONAGALCONTACT TYPESile (Standard)	OPERATING TEMPERATURE	-40°C ~ 85°C		
MOISTURE SENSITIVITY LEVEL (MSL)I (Unimited)MOISTURE SENSITIVITY LEVEL (MSL)3,000 CyclesMANUFACTURER STANDARD LEAD TIME0.80% (22.35mm)LENGTH0.80% (22.35mm)LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.20% (Cr.3mm)FEATURES-ELECTRICAL LIFE0.900 CyclesCURRENT RATINGDis Witch SPST 8 Position Through Hole Slide (Standard) Actuator 150mA 30VDCCURRENT RATING0.900 CyclesCONTACT FINISHGoldCONTACT FINISHGoldBODY MATERIALSPSTFATURESSTATURTOR TYPESide (Standard)	NUMBER OF POSITIONS	8		
MECHANICAL LIFE200 CyclesMANUFACTURER STANDARD LEAD TIME10 WeksLENGTH0.80° (2.35mm)LEAD FREE STATUS / ROHS STATUSLed free / ROHS CompliantHEIGHT ABOVE BOARD0.60° (3.00m)FEATURES-ELECTRICAL LIFE0.00 CyclesDETAILED DESCRIPTIONDis Wich SPST 80 Point Intrough Hole Slide (Standard) Actuator 150m ASUVDCCONTACT FINISHGoldCONTACT FINISHGoldCIRCUTTSPSTFODY MATERIALTempapatical Slide (Standard) Actuator 150m ASUVDCFODY MATERIALSIG (Standard)AUTOR TYPESide (Standard)	MOUNTING TYPE	Through Hole		
MANUFACTURER STANDARD LEAD TIME10 WeeksLENGTH0.880° (2.35mm)LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.265° (6.73mm)FEATURES-ELCTRICAL LIFE0.00 CyclesDETAILED DESCRIPTIONDip Switch SPS To Joint Through Hole Slide (Standard) Actuator 150mA 30VDCCONTACT FINISHColorer AllonCONTACT FINISHSoftCICRUITSPSTFODY MATERIALSie (Standard)SOT MATERIALSie (Standard)Sie (Standar	MOISTURE SENSITIVITY LEVEL (MSL)	1 (Unlimited)		
Length080° (22.35m)LEAD FREE STATUS / ROHS STATUSLed free / ROHS CompliatHEIGHT ABOVE BOARD0.25° (6.73m)FEATURES-ELECTRICAL LIFE0.00 CyclesCURRENT RATINGDis Witch SPST 8 Position Through Hole Slide (Standard) Actuator 150mA 30VDCCONTACT MATERIALCoper AllongCONTACT FINISHGoldCONTACT FINISHSPSTBODY MATERIALThroupasticalMarchanSinglaticalACTUATO TYPESinglatical	MECHANICAL LIFE	2,000 Cycles		
LEAD FREE STATUS / ROHS STATUSLead free / ROHS CompliantHEIGHT ABOVE BOARD0.265° (G.73mm)FEATURES-ELECTRICAL LIFE2,000 CyclesDETAILED DESCRIPTIONDis Wich SPST 8 Position Through Hole Slide (Standard) Actuator 150mA 30VDCCURRENT RATINGCoper AlloyCONTACT MATERIALGoldCONTACT FINISHSPSTBODY MATERIALThermoplasticACTUATOR YPESile (Standard)ACTUATOR YPESile (Standard)	MANUFACTURER STANDARD LEAD TIME	10 Weeks		
HEIGHT ABOVE BOARD0.265" (6.73mm)FEATURES-ELECTRICAL LIFE3.000 CyclesDETAILED DESCRIPTIONIop Switch SPD 8 Dosition Through Hole Slide (Standard) Actuator 150mA 30VDCCURRENT RATINGSomaCONTACT MATERIALCoper AlloyCONTACT FINISHGoldGDDY MATERIALFmoplasticBODY MATERIALSite (Standard)BODY MATERIALSite (Standard)BODY MATERIALSite (Standard)BODY MATERIALSite (Standard)BODY MATERIALSite (Standard)	LENGTH	0.880" (22.35mm)		
FEATURES-ELECTRICAL LIFE2,00 CyclesDETAILED DESCRIPTIONDip Switch SPDS 10 Policion Through Hole Slide (Standard) Actuator 150mA 30VDCCURRENT RATING150mACONTACT MATERIALCoper AlloyCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALThrongalsciSOLY MATERIALSide (Standard) Macuella SciSOLY MATERIALSide (Standard)BODY MATERIALSide (Standard)ACTUATOR TYPESide (Standard)	LEAD FREE STATUS / ROHS STATUS	Lead free / RoHS Compliant		
ELECTRICAL LIFE2,000 CyclesDETAILED DESCRIPTIONDip Switch SPS 8 Position Through Hole Slide (Standard) Actuator 150mA 30VDCCURRENT RATING150mACONTACT MATERIALOpper AlloyCONTACT FINISHGoldFRCUITSPSTPODY MATERIALThronopasticalBODY MATERIALSile (Standard)ACTUATOR TYPESile (Standard)	HEIGHT ABOVE BOARD	0.265" (6.73mm)		
DETAILED DESCRIPTIONDip Switch SPST 8 Position Through Hole Slide (Standard) Actuator 150mA 30VDCCURRENT RATING150mACONTACT MATERIALCoper AlloyCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALThernoplasticACTUATOR TYPESide (Standard)	FEATURES	-		
CURRENT RATING150mACONTACT MATERIALCoper AlloyCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALThemoplasticACTUATOR TYPESide (standard)	ELECTRICAL LIFE	2,000 Cycles		
CONTACT MATERIALCoper AlloyCONTACT FINISHGoldCIRCUITSPSTBODY MATERIALThemoplasticACTUATOR TYPESide (Standard)	DETAILED DESCRIPTION	Dip Switch SPST 8 Position Through Hole Slide (Standard) Actuator 150mA 30VDC		
CONTACT FINISHGoldCIRCUITSPSTBODY MATERIALThernoplasticACTUATOR TYPESide (Standard)	CURRENT RATING	150mA		
CIRCUITSPSTBODY MATERIALThermoplasticACTUATOR TYPESlide (Standard)	CONTACT MATERIAL	Copper Alloy		
BODY MATERIAL Thermoplastic   ACTUATOR TYPE Slide (Standard)	CONTACT FINISH	Gold		
ACTUATOR TYPE Slide (Standard)	CIRCUIT	SPST		
	BODY MATERIAL	Thermoplastic		
ACTUATOR LEVEL Flush, Recessed	ACTUATOR TYPE	Slide (Standard)		
	ACTUATOR LEVEL	Flush, Recessed		


# **Related Tags**

Grayhill, Inc. 78RB08T	78RB08T Distributor	78RB08T Supplier
78RB08T Price	78RB08T Pictures	78RB08T Image
78RB08T PDF Datasheet	78RB08T Download Datasheet	78RB08T Datasheet
78RB08T Stock	Buy 78RB08T	Buy Grayhill, Inc. 78RB08T
Grayhill, Inc. 78RB08T	Grayhill, Inc. Supplier	Grayhill, Inc. Distributor
Grayhill, Inc. 78RB08T	Grayhill Inc. 78RB08T	

## **Related Products**

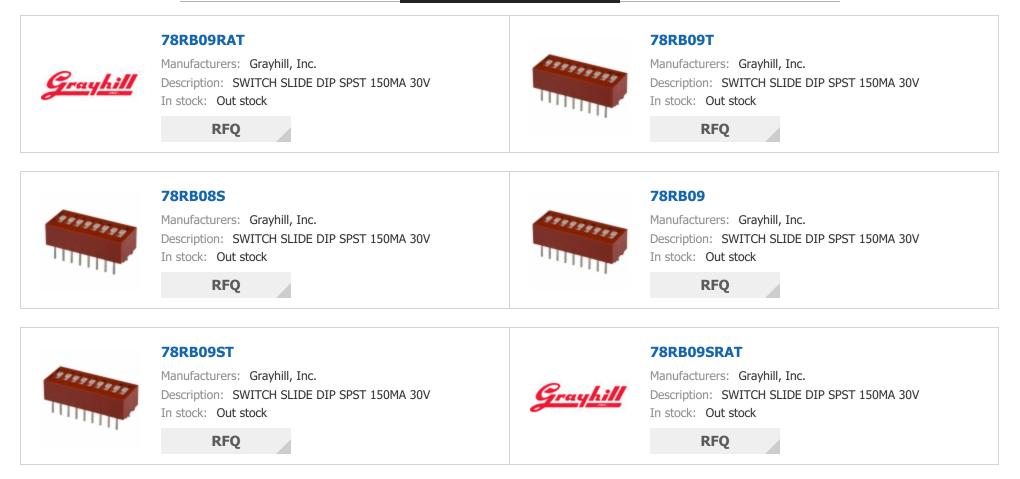

#### 78RB08



Manufacturers: Grayhill, Inc. Description: SWITCH SLIDE DIP SPST 150MA 30V In stock: Out stock

RFQ

#### **78RB08ST**



Manufacturers: Grayhill, Inc. Description: SWITCH SLIDE DIP SPST 150MA 30V In stock: Out stock

RFQ

**78RB08SRAT** 

#### **78RB08RAT**




Manufacturers: Grayhill, Inc. Description: SWITCH SLIDE DIP SPST 150MA 30V In stock: Out stock

RFQ

# Grayhill

Manufacturers: Grayhill, Inc. Description: SWITCH SLIDE DIP SPST 150MA 30V In stock: Out stock

RFQ

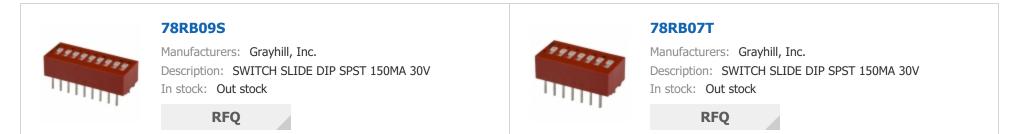

#### Copyright © 2020 Reliable Distributor of Electronic Components - Ocean-Components.com

E-mail: Info@Ocean-Components.com

Address: Room 2102, Connaught Commercial Building, 185 Wan Chai Rd, Wan Chai, Hong Kong

