# **BUK7K5R1-30E**

# Dual N-channel 30 V, 5.1 m $\Omega$ standard level MOSFET

6 November 2013

**Product data sheet** 

## 1. General description

Dual standard level N-channel MOSFET in an LFPAK56D (Dual Power-SO8) package using TrenchMOS technology. This product has been designed and qualified to AEC Q101 standard for use in high performance automotive applications.

### 2. Features and benefits

- Dual MOSFET
- Q101 compliant
- Repetitive avalanche rated
- Suitable for thermally demanding environments due to 175 °C rating
- True standard level gate with V<sub>GS(th)</sub> of greater than 1 V at 175 °C

### 3. Applications

- 12 V Automotive systems
- Motors, lamps and solenoid control
- · Transmission control
- Ultra high performance power switching

#### 4. Quick reference data

Table 1. Quick reference data

Symbol	Parameter	Conditions		Min	Тур	Max	Unit	
$V_{DS}$	drain-source voltage	T <sub>j</sub> ≥ 25 °C; T <sub>j</sub> ≤ 175 °C		-	-	30	V	
I <sub>D</sub>	drain current	V <sub>GS</sub> = 10 V; T <sub>mb</sub> = 25 °C; <u>Fig. 1</u>		-	-	40	Α	
P <sub>tot</sub>	total power dissipation	T <sub>mb</sub> = 25 °C; <u>Fig. 2</u>		-	-	68	W	
Static characte	Static characteristics FET1 and FET2							
R <sub>DSon</sub>	drain-source on-state resistance	$V_{GS} = 10 \text{ V}; I_D = 10 \text{ A}; T_j = 25 \text{ °C};$ Fig. 12		-	4.34	5.1	mΩ	
Dynamic characteristics FET1 and FET2								
$Q_{GD}$	gate-drain charge	$I_D = 10 \text{ A}; V_{DS} = 24 \text{ V}; V_{GS} = 10 \text{ V};$ $T_j = 25 \text{ °C}; \underline{\text{Fig. 14}}; \underline{\text{Fig. 15}}$		-	9	-	nC	



## 5. Pinning information

Table 2. Pinning information

Pin	Symbol	Description	Simplified outline	Graphic symbol	
1	S1	source1	8 7 6 5	D1 D1 D2 D2	
2	G1	gate1	1/		
3	S2	source2			
4	G2	gate2			
5	D2	drain2	S1 G	S1 G1 S	
6	D2	drain2	l î î î	mbk725	
7	D1	drain1	1 2 3 4 LFPAK56D (SOT1205)		
8	D1	drain1	2		

# 6. Ordering information

Table 3. Ordering information

Type number	Package					
	Name	Description	Version			
BUK7K5R1-30E	LFPAK56D	Plastic single ended surface mounted package (LFPAK56D); 8 leads	SOT1205			

## 7. Marking

Table 4. Marking codes

Type number	Marking code
BUK7K5R1-30E	75E130

# 8. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
$V_{DS}$	drain-source voltage	T <sub>j</sub> ≥ 25 °C; T <sub>j</sub> ≤ 175 °C	-	30	V
$V_{DGR}$	drain-gate voltage	$R_{GS}$ = 20 kΩ; $T_j \ge 25$ °C; $T_j \le 175$ °C	-	30	V
$V_{GS}$	gate-source voltage	T <sub>j</sub> ≤ 175 °C; DC	-20	20	V
I <sub>D</sub>	drain current	T <sub>mb</sub> = 25 °C; V <sub>GS</sub> = 10 V; <u>Fig. 1</u>	-	40	Α
		T <sub>mb</sub> = 100 °C; V <sub>GS</sub> = 10 V; <u>Fig. 1</u>	-	40	Α
I <sub>DM</sub>	peak drain current	$T_{mb}$ = 25 °C; pulsed; $t_p \le 10 \mu s$ ; Fig. 4	-	340	Α
P <sub>tot</sub>	total power dissipation	T <sub>mb</sub> = 25 °C; <u>Fig. 2</u>	-	68	W

BUK7K5R1-30E All information provided in this document is subject to legal disclaimers.

**Nexperia BUK7K5R1-30E** 

#### Dual N-channel 30 V, 5.1 m $\Omega$ standard level MOSFET

Symbol	Parameter	Conditions		Min	Max	Unit
T <sub>stg</sub>	storage temperature			-55	175	°C
T <sub>j</sub>	junction temperature			-55	175	°C
T <sub>sld(M)</sub>	peak soldering temperature			-	260	°C
Source-drain	diode FET1 and FET2					_
I <sub>S</sub>	source current	T <sub>mb</sub> = 25 °C		-	40	Α
I <sub>SM</sub>	peak source current	pulsed; $t_p \le 10 \ \mu s$ ; $T_{mb} = 25 \ ^{\circ}C$		-	340	Α
Avalanche R	uggedness FET1 and FET2					
E <sub>DS(AL)S</sub>	non-repetitive drain-source avalanche energy	$I_D = 40 \text{ A}; V_{sup} \le 30 \text{ V}; V_{GS} = 10 \text{ V};$ $T_{j(init)} = 25 \text{ °C}; Fig. 3$	[1][2]	-	228	mJ

- Refer to application note AN10273 for further information
- Single-pulse avalanche rating limited by maximum junction temperature of 175 °C




Fig. 1. Continuous drain current as a function of mounting base temperature

 $V_{GS} \ge 10V$ 




Fig. 2. Normalized total power dissipation as a function of mounting base temperature

$$P_{der} = \frac{P_{tot}}{P_{tot(25^{\circ}C)}} \times 100 \,\%$$

Nexperia BUK7K5R1-30E

Dual N-channel 30 V, 5.1 m $\Omega$  standard level MOSFET




Fig. 3. Single-pulse and repetitive avalanche rating; avalanche current as a function of avalanche time, FET1 and FET2

- (1) Single-pulse;  $T_j = 25 \,^{\circ}C$ .
- (2) Single-pulse;  $T_j = 150 \,^{\circ}C$ .
  - (3) Repetitive.

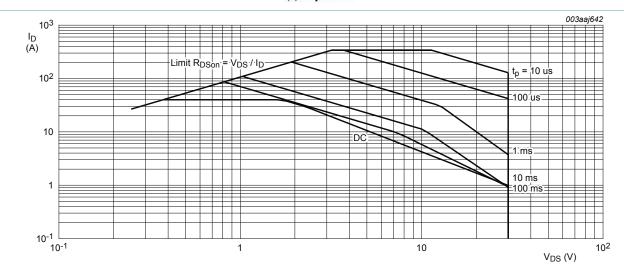


Fig. 4. Safe operating area; continuous and peak drain current as a function of drain-source voltage

$$T_{mb} = 25 \,^{\circ}C$$
;  $I_{DM}$  is single pulse

### 9. Thermal characteristics


Table 6. Thermal characteristics

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
R <sub>th(j-mb)</sub>	thermal resistance from junction to mounting base	Fig. 5	-	-	2.21	K/W

BUK7K5R1-30E

All information provided in this document is subject to legal disclaimers.

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
$R_{th(j-a)}$	thermal resistance from junction to ambient	Minimum footprint; mounted on a printed circuit board	-	95	-	K/W

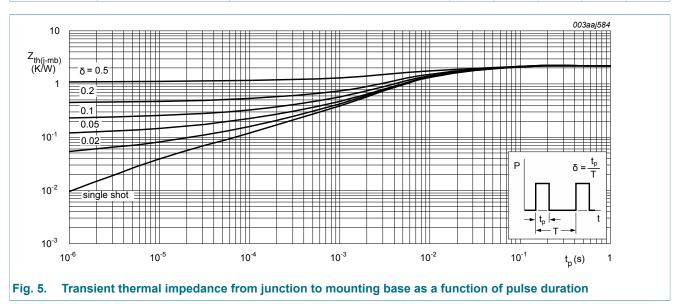

### 10. Characteristics

Table 7. Characteristics

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Static chara	acteristics FET1 and FET2		-			
V <sub>(BR)DSS</sub>	drain-source	$I_D = 250 \mu A; V_{GS} = 0 V; T_j = -55 °C$	27	-	-	V
	breakdown voltage	$I_D = 250 \ \mu A; \ V_{GS} = 0 \ V; \ T_j = 25 \ ^{\circ}C$	30	-	-	V
$V_{GS(th)}$	gate-source threshold voltage	I <sub>D</sub> = 1 mA; V <sub>DS</sub> = V <sub>GS</sub> ; T <sub>j</sub> = 25 °C; Fig. 10; Fig. 11	2.4	3	4	V
		I <sub>D</sub> = 1 mA; V <sub>DS</sub> = V <sub>GS</sub> ; T <sub>j</sub> = 175 °C; Fig. 10; Fig. 11	1	-	-	V
		I <sub>D</sub> = 1 mA; V <sub>DS</sub> = V <sub>GS</sub> ; T <sub>j</sub> = -55 °C; Fig. 10; Fig. 11	-	-	4.5	V
I <sub>DSS</sub>	drain leakage current	$V_{DS} = 30 \text{ V}; V_{GS} = 0 \text{ V}; T_j = 175 \text{ °C}$	-	-	500	μA
		$V_{DS} = 30 \text{ V}; V_{GS} = 0 \text{ V}; T_j = 25 ^{\circ}\text{C}$	-	0.02	1	μA
I <sub>GSS</sub>	gate leakage current	$V_{GS} = -20 \text{ V}; V_{DS} = 0 \text{ V}; T_j = 25 \text{ °C}$	-	2	100	nA
		$V_{GS} = 20 \text{ V}; V_{DS} = 0 \text{ V}; T_j = 25 ^{\circ}\text{C}$	-	2	100	nA
R <sub>DSon</sub>	drain-source on-state resistance	$V_{GS}$ = 10 V; $I_{D}$ = 10 A; $T_{j}$ = 25 °C; Fig. 12	-	4.34	5.1	mΩ
		V <sub>GS</sub> = 10 V; I <sub>D</sub> = 10 A; T <sub>j</sub> = 175 °C; Fig. 12; Fig. 13	-	7.6	9.4	mΩ

BUK7K5R1-30E

All information provided in this document is subject to legal disclaimers.

Nexperia

#### Dual N-channel 30 V, 5.1 m $\Omega$ standard level MOSFET

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Dynamic cl	naracteristics FET1 and FE	T2				
Q <sub>G(tot)</sub>	total gate charge	I <sub>D</sub> = 10 A; V <sub>DS</sub> = 24 V; V <sub>GS</sub> = 10 V;	-	31.1	-	nC
Q <sub>GS</sub>	gate-source charge	T <sub>j</sub> = 25 °C; <u>Fig. 14</u> ; <u>Fig. 15</u>	-	7.6	-	nC
$Q_{GD}$	gate-drain charge		-	9	-	nC
C <sub>iss</sub>	input capacitance	V <sub>GS</sub> = 0 V; V <sub>DS</sub> = 25 V; f = 1 MHz;	-	1764	2352	pF
C <sub>oss</sub>	output capacitance	T <sub>j</sub> = 25 °C; <u>Fig. 16</u>	-	422	506	pF
C <sub>rss</sub>	reverse transfer capacitance		-	242	332	pF
t <sub>d(on)</sub>	turn-on delay time	$V_{DS}$ = 24 V; $R_L$ = 2.4 $\Omega$ ; $V_{GS}$ = 10 V;	-	9.5	-	ns
t <sub>r</sub>	rise time	$R_{G(ext)} = 5 \Omega; T_j = 25 °C; I_D = 10 A$	-	12.5	-	ns
t <sub>d(off)</sub>	turn-off delay time		-	19.5	-	ns
t <sub>f</sub>	fall time		-	13	-	ns
Source-dra	in diode FET1 and FET2		l			
V <sub>SD</sub>	source-drain voltage	I <sub>S</sub> = 10 A; V <sub>GS</sub> = 0 V; T <sub>j</sub> = 25 °C; <u>Fig. 17</u>	-	0.78	1.2	V
t <sub>rr</sub>	reverse recovery time	$I_S = 10 \text{ A}; dI_S/dt = -100 \text{ A/}\mu\text{s}; V_{GS} = 0 \text{ V};$	-	27.4	-	ns
Q <sub>r</sub>	recovered charge	V <sub>DS</sub> = 15 V; T <sub>j</sub> = 25 °C	-	20.7	-	nC




Fig. 6. Forward transconductance as a function of drain current; typical values

 $T_j = 25^{\circ}C; \ V_{DS} = 10V$ 




Fig. 7. Drain-source on-state resistance as a function of gate-source voltage; typical values

 $T_j = 25^{\circ}C; I_D = 10A$ 




Fig. 8. Output characteristics; drain current as a function of drain-source voltage; typical values




Fig. 10. Sub-threshold drain current as a function of gate-source voltage

$$T_j = 25$$
°C;  $V_{DS} = 5V$ 




Fig. 9. Transfer characteristics: drain current as a function of gate-source voltage; typical values

$$V_{DS} = 10V$$




Fig. 11. Gate-source threshold voltage as a function of junction temperature

$$I_D = 1 \text{ mA}; \ V_{DS} = V_{GS}$$

Nexperia BUK7K5R1-30E

#### Dual N-channel 30 V, 5.1 m $\Omega$ standard level MOSFET




Fig. 12. Drain-source on-state resistance as a function of drain current; typical values




Fig. 14. Gate charge waveform definitions




Fig. 13. Normalized drain-source on-state resistance factor as a function of junction temperature

$$a = \frac{R_{DSon}}{R_{DSon (25^{\circ}C)}}$$





Fig. 15. Gate-source voltage as a function of gate charge; typical values

$$T_j = 25^{\circ}C; I_D = 10A$$

Nexperia **BUK7K5R1-30E** 

#### Dual N-channel 30 V, 5.1 m $\Omega$ standard level MOSFET



as a function of drain-source voltage; typical values

$$V_{GS} = \mathbf{0}V; \ f = \mathbf{1}MHz$$




Fig. 16. Input, output and reverse transfer capacitances | Fig. 17. Source (diode forward) current as a function of source-drain (diode forward) voltage; typical values

$$V_{GS} = 0V$$

## 11. Package outline

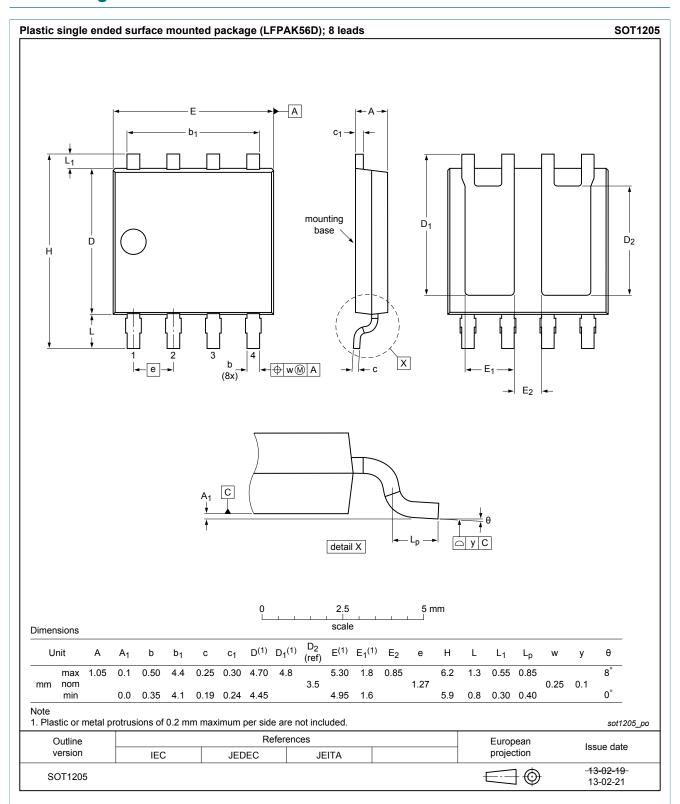


Fig. 18. Package outline LFPAK56D (SOT1205)

BUK7K5R1-30E All information provided in this document is subject to legal disclaimers.

### 12. Legal information

#### 12.1 Data sheet status

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <a href="http://www.nexperia.com">http://www.nexperia.com</a>.

#### 12.2 Definitions

**Preview** — The document is a preview version only. The document is still subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### 12.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use in automotive applications — This Nexperia product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nexperia.com/profile/terms">http://www.nexperia.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

BUK7K5R1-30E

All information provided in this document is subject to legal disclaimers.

Nexperia BUK7K5R1-30E

#### Dual N-channel 30 V, 5.1 m $\Omega$ standard level MOSFET

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### 12.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Nexperia

## **BUK7K5R1-30E**

### Dual N-channel 30 V, 5.1 m $\Omega$ standard level MOSFET

## 13. Contents

1	General description	1
2	Features and benefits	1
3	Applications	1
4	Quick reference data	1
5	Pinning information	2
6	Ordering information	
7	Marking	
8	Limiting values	
9	Thermal characteristics	4
10	Characteristics	5
11	Package outline	10
12	Legal information	
12.1	Data sheet status	
12.2	Definitions	11
12.3	Disclaimers	11
12.4	Trademarks	12

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com Date of release: 06 November 2013

<sup>©</sup> Nexperia B.V. 2017. All rights reserved