

# 40x40x28 mm

San Ace 40 9GE type  



## General Specifications

- Material ..... Frame: Aluminum, Impeller: Plastic (Flammability: UL 94V-0)
- Expected life ..... See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)
- Motor protection function ..... Locked rotor burnout protection, Reverse polarity protection  
For details, please refer to p. 529.
- Dielectric strength ..... 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance ..... 10 MΩ or more with a 500 VDC megger (between lead wire conductors and frame)
- Sound pressure level (SPL) ..... At 1 m away from the air inlet
- Storage temperature ..... -30 to +70°C (Non-condensing)
- Lead wire .....  Red  Black  Sensor  Yellow  Control  Brown
- Mass ..... 55 g

## Specifications

The models listed below have pulse sensors with PWM control function.

Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle* [%]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹]	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inchH₂O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
9GE0412P3K03	12	10.8 to 13.2	100	0.84	10.08	16500	0.76 26.8	415 1.666	58	-20 to +60	40000/60°C
			0	0.07	0.84	3000	0.13 4.6	13 0.052	17		
9GE0412P3J03	12	10.8 to 13.2	100	0.65	7.8	15000	0.69 24.4	343.0 1.378	56	-20 to +60	40000/60°C
			0	0.05	0.6	2650	0.12 4.2	10.7 0.042	14		
9GE0412P3G03	12	10.8 to 13.2	100	0.47	5.64	13000	0.6 21.2	260 1.044	52	-20 to +60	40000/60°C
			0	0.05	0.6	2400	0.11 3.9	8.2 0.033	13		


\* PWM frequency: 25 kHz

Other sensor specifications are available as options. Refer to the index (p. 553).


## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9GE0412P3K03 With pulse sensor with PWM control function


### PWM duty cycle

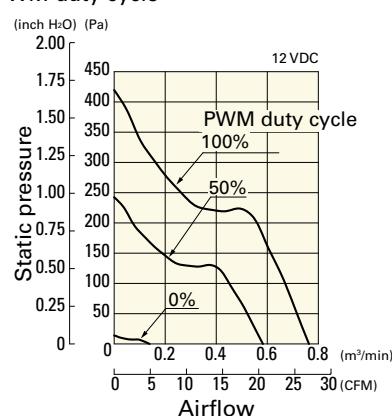

### Operating voltage range

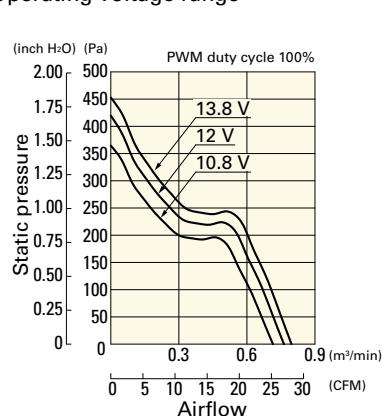


### PWM duty - Speed characteristics example

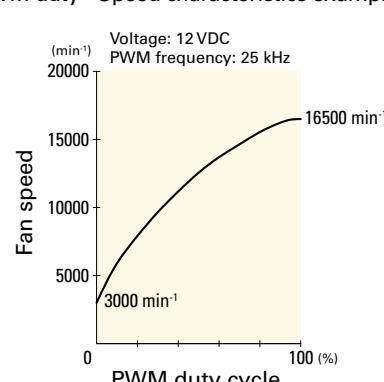


## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

**9GE0412P3J03** With pulse sensor with PWM control function


### PWM duty cycle

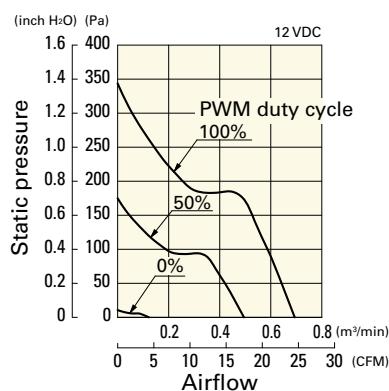

### Operating voltage range

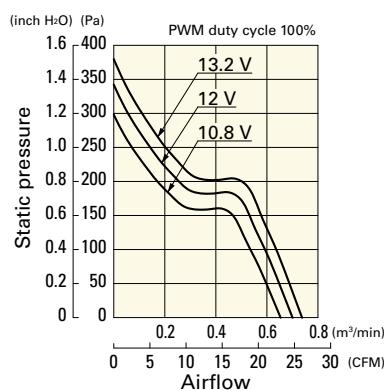


### PWM duty - Speed characteristics example

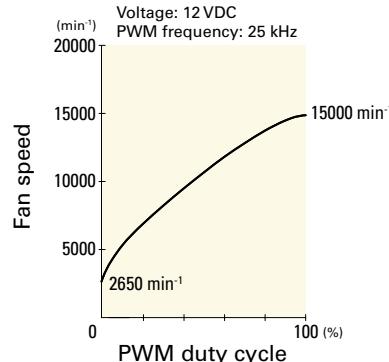


**9GE0412P3G03** With pulse sensor with PWM control function


### PWM duty cycle

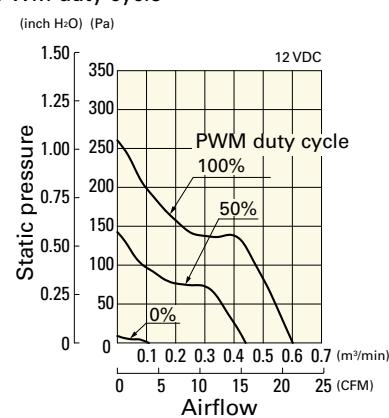


### Operating voltage range

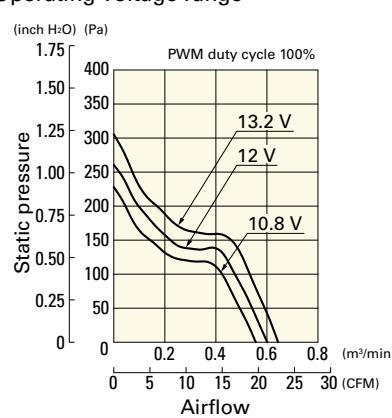


### PWM duty - Speed characteristics example

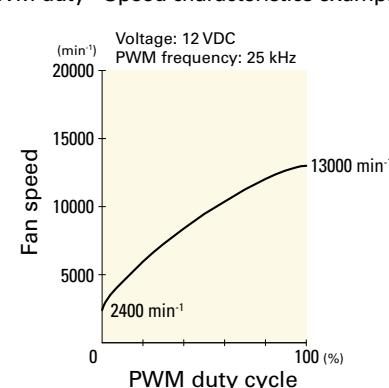

## Dimensions (unit: mm)

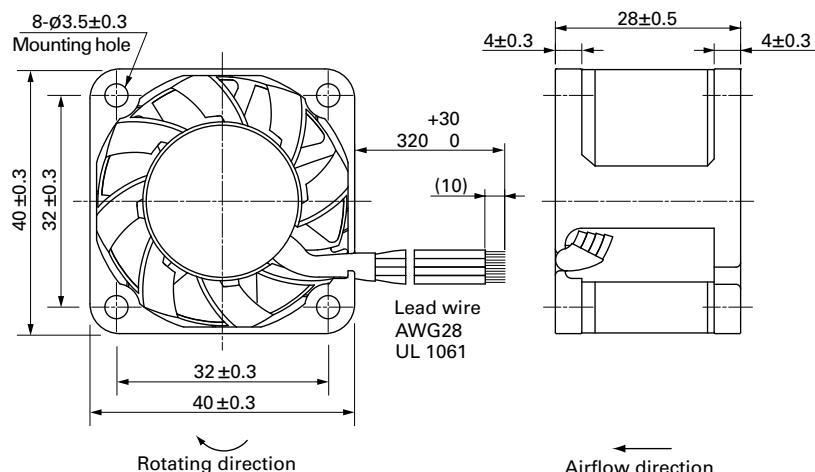

## ■ Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

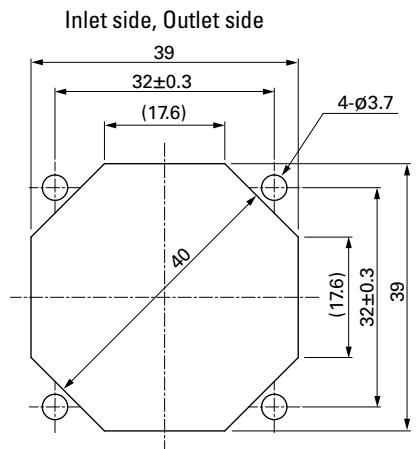

## ■ Options

Finger guards

page: p. 513

Model no.: 109-059, 109-059H